Isolation Transformer


EPA4017G

- Designed for HPNA 3.0 Applications
- Operating Temperature : 0°C to +70°C
- Isolation : 1500 Vrms


Electrical Parameters @ 25° C

Pri. OCL (μH Min.)	**Interwinding Capacitance** (pF Max..)	**Leakage Inductance** (μH Max.)	**Insertion Loss** (dB Max.)	**Return Loss** (dB Min.)	**DCR** (Ω Max.)	
Pins 1-3	Pri. to Sec.	Pins 1-3 with 6-4 shorted	1-30 MHz	1-30 MHz	Pri.	Sec.
177	15	0.5	-0.5	-15	0.6	0.4

Schematic



Package

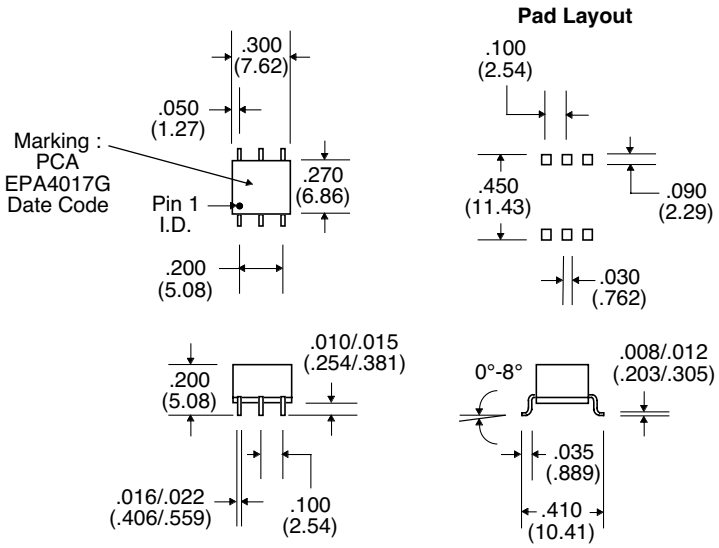

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 /.25

PCA ELECTRONICS, INC.
16799 SCHOENBORN ST.
NORTH HILLS, CA 91343

Product performance is limited to specified parameters. Data is subject to change without prior notice.

TEL: (818) 892-0761
FAX: (818) 894-5791
http://www.pca.com