


Legacy NMA2108-A2S 1 kHz to 300 MHz

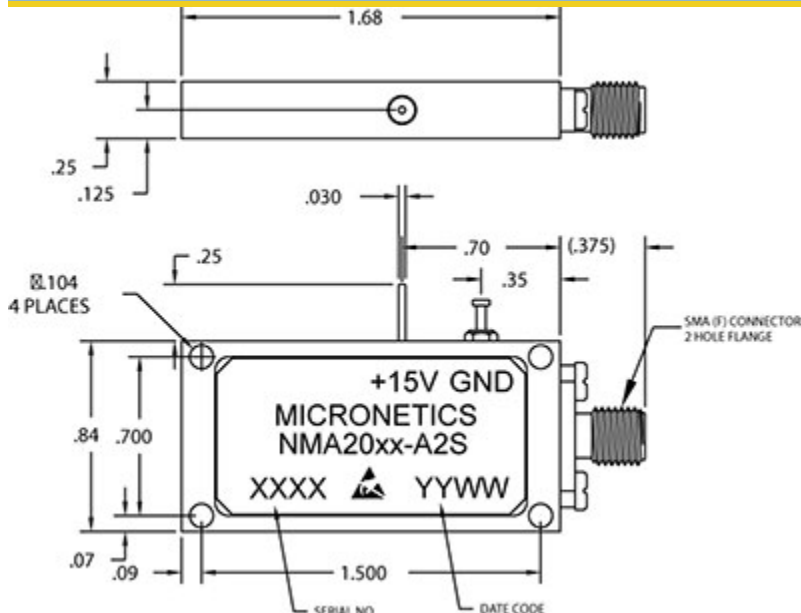

Specifications

| | |
|----------------------------------|------------------|
| RF Frequency | 1 kHz to 300 MHz |
| Noise Output | 91.8 dB Min ENR |
| Noise Spectral Density (N_o) | -82.2 dBm/Hz Min |
| Flatness | 4 dB P-P Max |
| Peak Factor | 5:1 |
| Bias Voltage | 15 V |
| Impedance | 50 ohms |

Package and Connectivity

| | |
|----------------|-----------|
| Construction | Coaxial |
| Package Type | S Package |
| Connector Type | SMA(f) |

Environmental

| | |
|-----------------------|---------------|
| Operating Temperature | -55 to 95 °C |
| Storage Temperature | -65 to 125 °C |

Notes

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | www.Micronetics.com



