

Voltage Variable Absorptive Attenuator
35 dB, DC - 2.0 GHz

AT-635
V6

Features

- 35 dB Voltage Variable Attenuation at 1 GHz
- Single Voltage Control: 0 to -4 Volts
- Low DC Power Consumption
- Nanosecond Switching Speed
- Temperature Range: -40°C to +85°C
- SOIC-14 Plastic Package
- Tape and Reel Packaging Available

Description

M/A-COM's AT-635 is a GaAs MMIC voltage variable absorptive attenuator in a low cost SOIC 14-lead surface mount plastic package. The AT-635 is ideally suited for use where attenuation fine tuning, fast switching and very low power consumption are required.

Typical applications include radio, cellular, GPS equipment and other automatic gain/level control circuits.


The AT-635 is fabricated with a monolithic GaAs MMIC using a mature 1-micron process. The process features full chip passivation for increased performance and reliability.

Ordering Information

Part Number	Package
AT-635	SOIC 14-Lead Plastic Package
AT-635TR	Tape and Reel

Note: Reference Application Note M513 for reel size information.

Functional Schematic

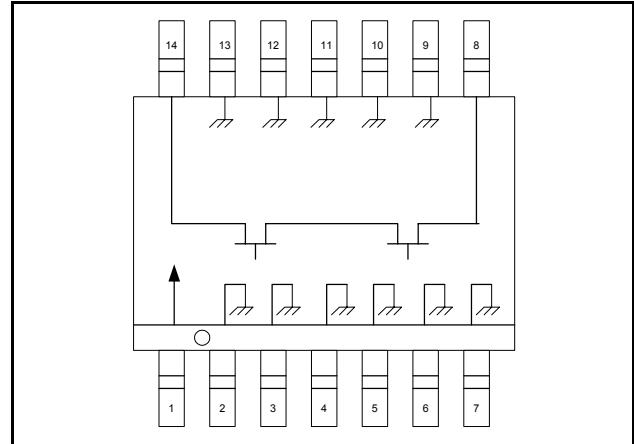

Pin Configuration

Pin No.	Function	Pin No.	Function
1	V _C	8	RF2
2	Ground	9	Ground
3	Ground	10	Ground
4	Ground	11	Ground
5	Ground	12	Ground
6	Ground	13	Ground
7	Ground	14	RF1

Absolute Maximum Ratings^{1,2}

Parameter	Absolute Maximum
Input Power	+21 dBm
Control Voltage	-8.5 V ≤ V _C ≤ +5 V
Operating Temperature	-40°C to +85°C
Storing Temperature	-65°C to +150°C

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. M/A-COM does not recommend sustained operation near these survivability limits.

Voltage Variable Absorptive Attenuator
35 dB, DC - 2.0 GHz

AT-635
V6


Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50 \Omega$

Parameter	Test Conditions ³	Units	Min.	Typ.	Max.
Insertion Loss	DC - 0.5 GHz	dB	—	6.7	7.0
	0.5 - 1.0 GHz	dB	—	7.2	7.4
	1.0 - 2.0 GHz	dB	—	7.5	7.8
Flatness (Peak to Peak)	10 dB Attenuation – DC - 2.0 GHz	dB	—	± 1.0	± 1.3
	20 dB Attenuation – DC - 2.0 GHz	dB	—	± 1.2	± 1.5
	30 dB Attenuation – DC - 2.0 GHz	dB	—	± 1.2	± 1.5
VSWR		Ratio	—	2.0:1	—
Trise, Tfall	10% to 90% RF, 90% to 10% RF	nS	—	2	—
Ton, Toff	50% Control to 90% RF, 50% Control to 10% RF	nS	—	4	—
Transients	In Band	mV	—	30	—
Power Handling	Linear Operation	dBm	—	—	13
	Absolute maximum Input Power	dBm	—	—	21
IP ₂	0.05 GHz	dBm	—	34	—
	0.5 - 2.0 GHz Measured Relative to Input Power (For two-tone Input Power Up to +5 dBm)	dBm	—	47	—
IP ₃	0.05 GHz	dBm	18	31 ⁴	—
	0.5 - 2.0 GHz Measured Relative to Input Power (For two-tone Input Power Up to +5 dBm)	dBm	18.5	36 ⁴	—

3. Control voltage: 0 to -4 volts @ 20 μA typical.

4. For levels above 6 dB attenuation. For levels below 6 dB, the minimum specification numbers apply.

SOIC-14

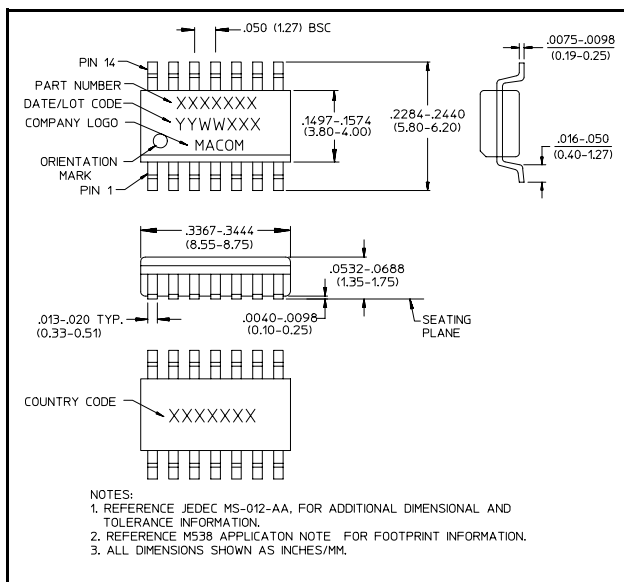

Handling Procedures

Please observe the following precautions to avoid damage:

Static Sensitivity


Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

Voltage Variable Absorptive Attenuator
35 dB, DC - 2.0 GHz


AT-635
V6

Typical Performance Curves


Insertion Loss vs. Frequency

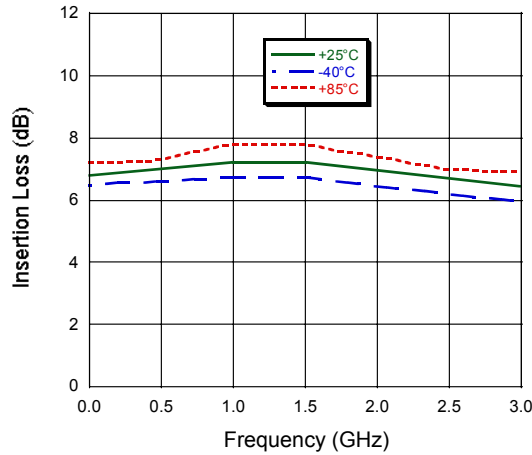

Attenuation vs. Control Voltage, F = 1 GHz

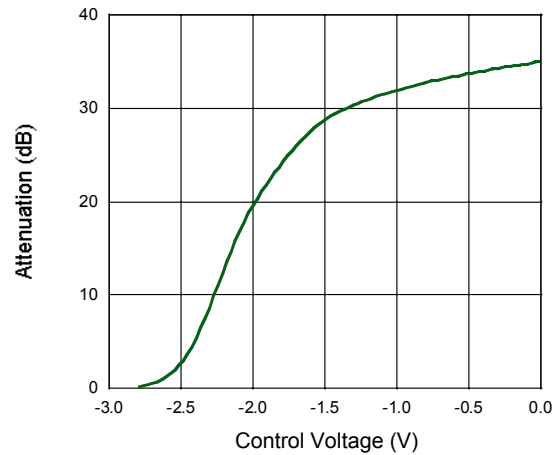

Attenuation vs. Frequency

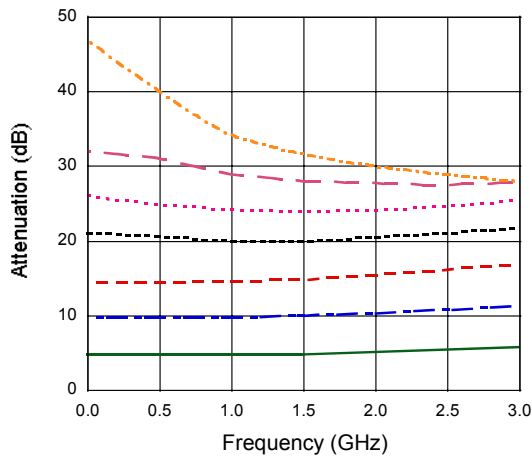

VSWR vs. Frequency

