



MATERIALS

FERRULE	CERAMIC
SLEEVE	CERAMIC
HOUSING	PLASTIC

Model No.	Attenuation	A		B		C	
		Inches	mm	Inches	mm	Inches	mm
PE700004-5	5 dB	1.055	26.8	0.390	9.9	0.275	7.0
PE700004-10	10 dB	1.055	26.8	0.390	9.9	0.275	7.0
PE700004-15	15 dB	1.055	26.8	0.390	9.9	0.275	7.0
PE700004-20	20 dB	1.055	26.8	0.390	9.9	0.275	7.0
PE700004-25	25 dB	1.055	26.8	0.390	9.9	0.275	7.0
PE700004-30	30 dB	1.055	26.8	0.390	9.9	0.275	7.0

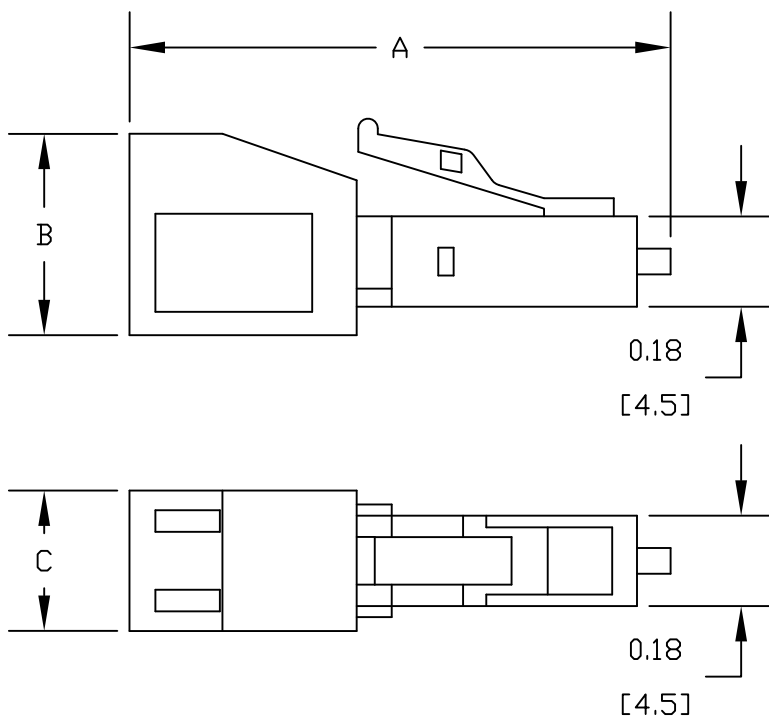

SPECIFICATIONS

Single Mode
 PC Polish
 Attenuation Value: 5, 10, 15, 20, 25 & 30dB $\pm 10\%$ Typical, $\pm 15\%$ Maximum
 Operating Wavelength: 1300/1550 nm
 Insertion Loss: <0.3dB Typical, 1dB Maximum
 Return Loss: 40 dB Minimum, >50dB Typical
 Operating Temperature: -40°C to +75°C



PASTERNAK ENTERPRISES, INC.
 P.O BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451
 WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

DWG TITLE		DES.				
PE700004-XX		LC ATTENUATOR ATTENUATOR, SINGLE MODE				
REV. B	FSCM NO. 53919	CAD FILE 082311	SCALE N/A	SIZE A	2231	

- NOTES:
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 - ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 - DIMENSIONS ARE IN INCHES [mm].