

**1 510 nm OPTICAL FIBER COMMUNICATIONS
 InGaAsP STRAINED MQW DC-PBH LASER DIODE MODULE**


DESCRIPTION

The NX8501 Series is a 1 510 nm phase-shifted DFB (Distributed Feed-Back) laser diode with single mode fiber. The Multiple Quantum Well (MQW) structure is adopted to achieve stable dynamic single longitudinal mode operation over wide temperature range of 0 to +65 °C.

It is designed for on-line monitoring of dense WDM fiber-optic networks.


FEATURES

- Peak wavelength $\lambda_p = 1\ 510\ \text{nm}$
- Output power $P_f = 2.0\ \text{mW}$
- Low threshold current $I_{th} = 20\ \text{mA} @ T_c = 25\ ^\circ\text{C}$
- Wide operating temperature range $T_c = 0\ \text{to}\ +65\ ^\circ\text{C}$
- InGaAs monitor PIN-PD
- Based on Bellcore TA-NWT-000983

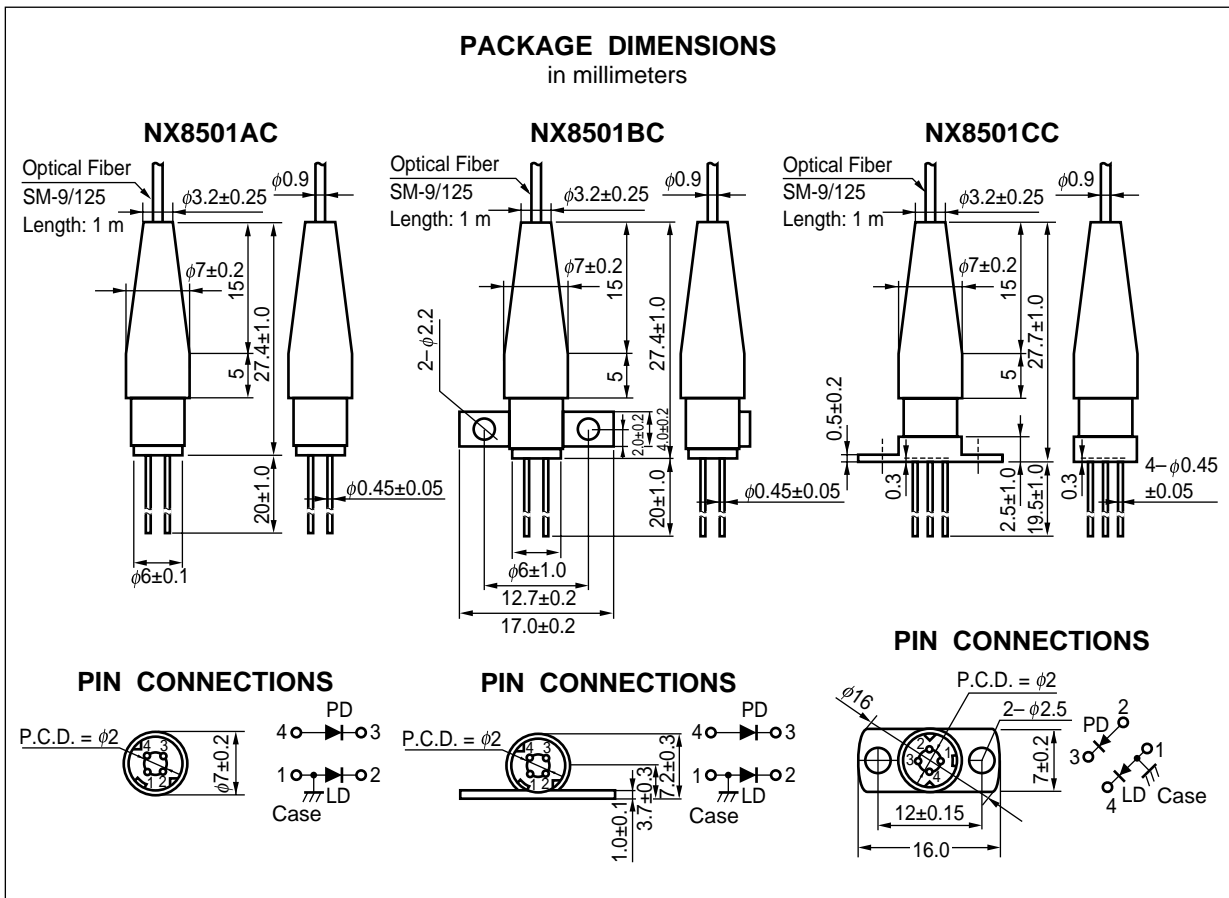

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.
 Not all devices/types available in every country. Please check with local NEC representative for availability and additional information.

★

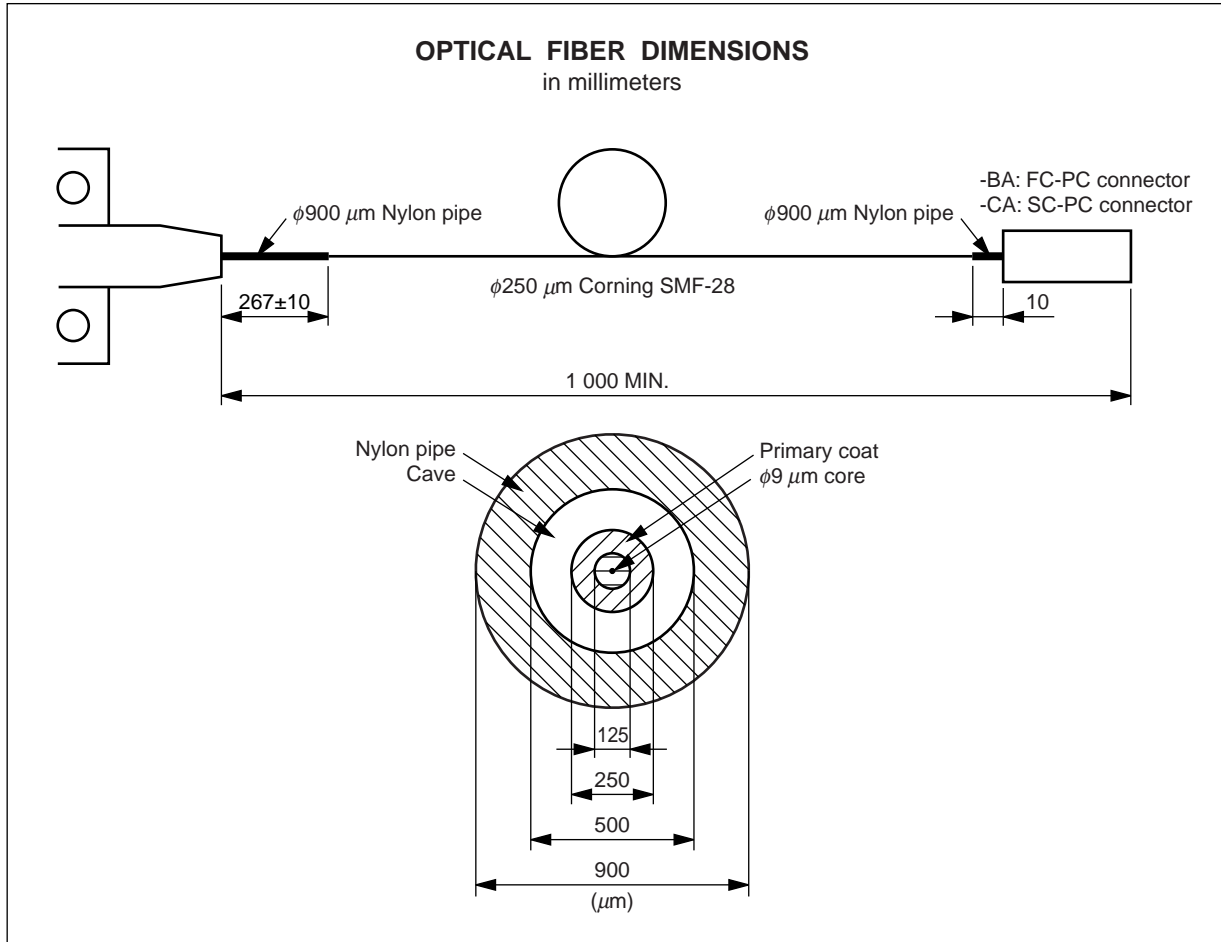

★ ORDERING INFORMATION

Part Number	Available Connector	Flange Type	Fiber Type
NX8501AC	Without Connector	No Flange	φ250 μm Corning SMF-28 with loose tube ^{*1}
NX8501AC-BA	With FC-PC Connector		
NX8501AC-CA	With SC-PC Connector		
NX8501BC	Without Connector	Flat Mount Flange	
NX8501BC-BA	With FC-PC Connector		
NX8501BC-CA	With SC-PC Connector		
NX8501CC	Without Connector	Vertical Flange	
NX8501CC-BA	With FC-PC Connector		
NX8501CC-CA	With SC-PC Connector		
NX8501AG	Without Connector	No Flange	Standard SMF
NX8501AG-BA	With FC-PC Connector		
NX8501AG-CA	With SC-PC Connector		
NX8501BG	Without Connector	Flat Mount Flange	
NX8501BG-BA	With FC-PC Connector		
NX8501BG-CA	With SC-PC Connector		
NX8501CG	Without Connector	Vertical Flange	
NX8501CG-BA	With FC-PC Connector		
NX8501CG-CA	With SC-PC Connector		

*1 Please refer to **OPTICAL FIBER DIMENSIONS**.


ABSOLUTE MAXIMUM RATINGS (T_c = 25 °C, unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Optical Output Power from Fiber	P _f	5	mW
Forward Current of LD	I _F	200	mA
Reverse Voltage of LD	V _R	2.0	V
Forward Current of PD	I _F	10	mA
Reverse Voltage of PD	V _R	20	V
Operating Case Temperature	T _c	0 to +65	°C
Storage Temperature	T _{stg}	-40 to +85	°C
Lead Soldering Temperature (10 s)	T _{slid}	260	°C







ELECTRO-OPTICAL CHARACTERISTICS (T_c = 0 to +65 °C, unless otherwise specified)


Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Forward Voltage	V _F	P _f = 2.0 mW, T _c = 25 °C		1.6	2.0	V
Operating Current	I _{op}	P _f = 2.0 mW		80	100	mA
Threshold Current	I _{th}	P _f = 0.2 to 1.0 mW, T _c = 25 °C		20	30	mA
Differential Efficiency from Fiber	η _d	P _f = 2.0 mW	0.04	0.08		W/A
Peak Emission Wavelength	λ _p	P _f = 2.0 mW	1 500	1 510	1 520	nm
Side Mode Suppression Ratio	SMSR	P _f = 2.0 mW	30	35		dB
Spectral Line Width	Δν	P _f = 2.0 mW, 3 dB down, T _c = 25 °C		2	10	MHz
Relative Intensity Noise	RIN	P _f = 2.0 mW, T _c = 25 °C		-155	-150	dB/Hz
Rise Time	t _r	10-90 %, T _c = 25 °C, P _f = 2.0 mW		0.3	0.5	ns
Fall Time	t _f	90-10 %, T _c = 25 °C, P _f = 2.0 mW		0.3	0.5	ns
Monitor Current	I _m	V _R = 5 V, P _f = 2.0 mW, T _c = 25 °C	100	1 000	2 000	μA
Monitor Dark Current	I _D	V _R = 5 V, T _c = 25 °C			10	nA
Tracking Error	γ ⁻¹	I _m = const. (@ P _f = 2.0 mW, T _c = 25 °C)	-1.0		1.0	dB

$$*1 \gamma = \left| 10 \log \frac{P_f}{2.0 \text{ mW}} \right|$$

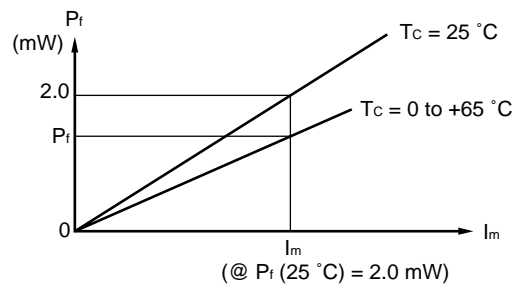

TYPICAL CHARACTERISTICS ($T_c = 25\text{ }^\circ\text{C}$, unless otherwise specified)

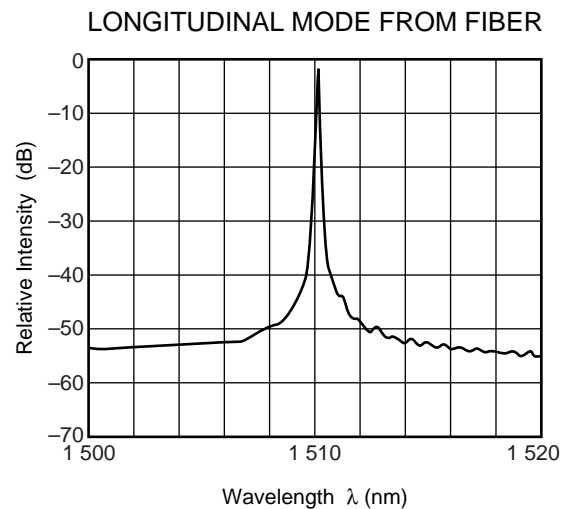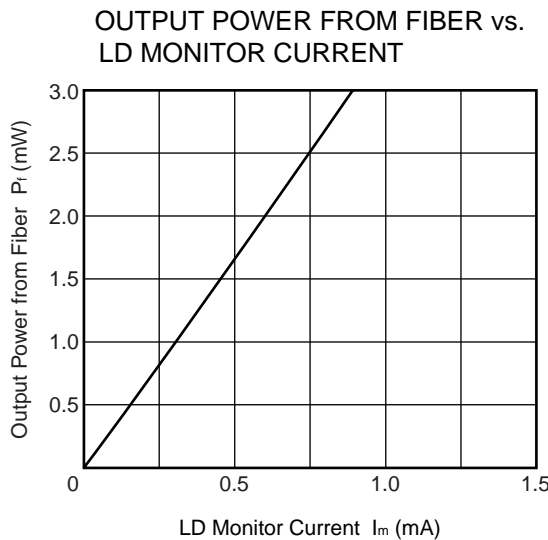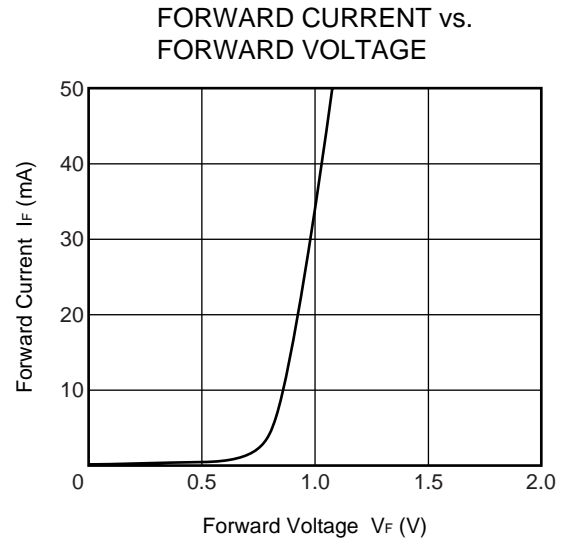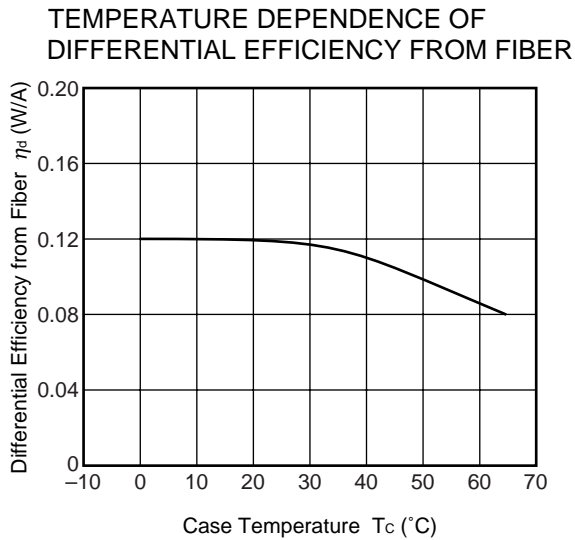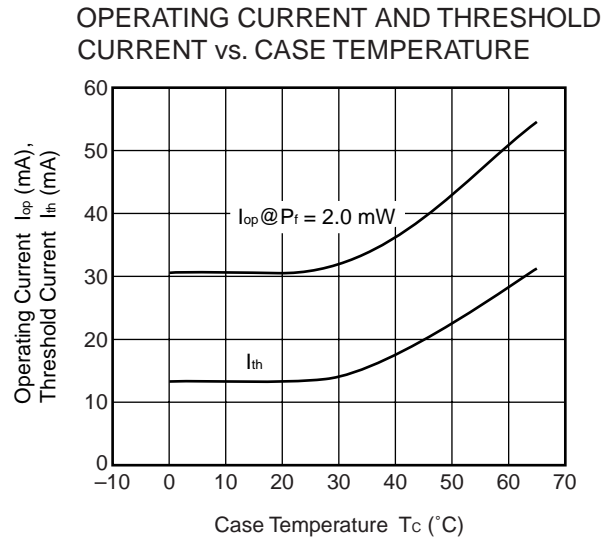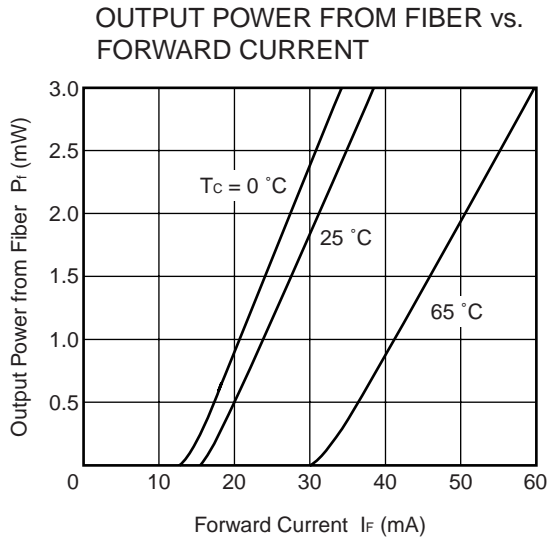

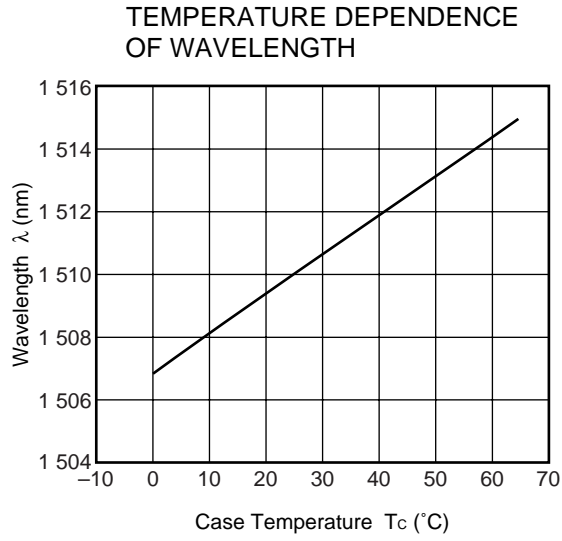

Remark The graphs indicate nominal characteristics.

★ LD FAMILY FOR DENSE WDM APPLICATION

Part Number	Absolute Maximum Ratings		Typical Characteristics			Description	Package
	T _c (°C)	T _{stg} (°C)	I _{th} (mA)	P _r (mW)	λ _c (nm)		
			TYP.	MIN.	TYP.		
NDL7540PA	-20 to +65	-40 to +85	40	90	1 480	1 480 nm pump LD module	BFY
NX7460LE ^{*1}	-20 to +65	-40 to +85	25	120	1 480	1 480 nm pump LD module	BFY
NX8501 Series	0 to +65	-40 to +85	20	2	1 510	Telemetry	Coaxial
NX8561JC ^{*1}	0 to +65	-40 to +85	20	3	1 510	Telemetry	DIP
NX7660JC ^{*1}	-20 to +65	-40 to +85	15	5	1 625	Telemetry	DIP
NDL7910P	-20 to +70	-40 to +85	7	0.5	1 550 ^{*2}	2.5 G EA modulator integrated module	BFY
NX8562LB	-20 to +65	-40 to +85	20	20	1 550 ^{*2}	1 550 CW LD module	BFY
NX8563LB	-20 to +65	-40 to +85	20	10	ITU-T ^{*3}	1 550 CW LD module	BFY

*1 Under development

*2 Wavelength selectable for ITU-T standards upon request.

*3 Wavelength selectable for ITU-T standards.

REFERENCE


Document Name	Document No.
NEC semiconductor device reliability/quality control system	C11159E
Quality grades on NEC semiconductor devices	C11531E
Semiconductor device mounting technology manual	C10535E
Semiconductor selection guide	X10679E

[MEMO]

[MEMO]

CAUTION

Within this device there exists GaAs (Gallium Arsenide) material which is a harmful substance if ingested. Please do not under any circumstances break the hermetic seal.

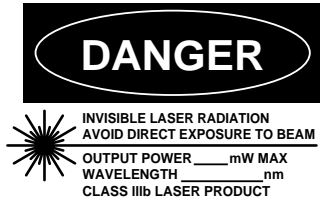


DANGER

INVISIBLE LASER RADIATION
AVOID DIRECT EXPOSURE TO BEAM

OUTPUT POWER _____ mW MAX
WAVELENGTH _____ nm
CLASS IIIb LASER PRODUCT

SEMICONDUCTOR LASER



AVOID EXPOSURE-Invisible
Laser Radiation is emitted from
this aperture

NEC Corporation

NEC Building, 7-1, Shiba 5-chome,
Minato-ku, Tokyo 108-01, Japan

Type number: _____

Manufactured: _____

Serial Number: _____

This product conforms to FDA
regulations as applicable
to standards 21 CFR Chapter 1.
Subchapter J.

The export of this product from Japan is prohibited without governmental license. To export or re-export this product from a country other than Japan may also be prohibited without a license from that country. Please call an NEC sales representative.

- **The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.**
 - No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.
 - NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.
 - Descriptions of circuits, software, and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software, and information in the design of the customer's equipment shall be done under the full responsibility of the customer. NEC Corporation assumes no responsibility for any losses incurred by the customer or third parties arising from the use of these circuits, software, and information.
 - While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.
 - NEC devices are classified into the following three quality grades:
"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.
 - Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
 - Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
 - Specific: Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.
- The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.