2D Drawing	IGES	STEP	3D PDF
Solder Profile	CofC RoHS Compliant	CofC REACH Compliant	UL Plastic File
Certificate of Origin	Check Stock	Request a Sample	Send Us An Email

Generated Part Number

STX-3150-3C-1

Part Number Builder

STX-3150	–	3	C
Series		Number of Pins	Threading Option

AUDIO JACKS: STX-3150 Series

3.5mm Jack Slim Design with Switch PCB Mount

Product Features

Audio Applications for Computers and Multimedia
Can Be Used To Activate Speakers, an Equalizer or to Configure the Audio Signal
Up to One Double-Pole Single-Throw Switch
Spring Loaded Contacts for High Contact Reliability
Narrow Body Uses Minimal Board Space
CSA/NRTL Certified File No. LR78160

Performance Specifications

Materials and Finish
Housing
PBT Thermoplastic, UL94V-0 Rated, Black Color
Bushing
Brass, Nickel Plated
Terminals and Contacts
Phosphor Bronze, Silver Plated
Coil Springs
Spring Steel

Mechanical Characteristics

Insertion Force
0.3kg - 3.0kg
Extraction Force
0.3kg - 3.0kg
Durability
5000 Mating Cycles

Electrical Characteristics

Insulation Resistance
100 Megohms Min. at 500V DC
Contact Resistance
30 milliohms Max.
Dielectric Withstanding Voltage
500V AC RMS for 1 Minute
Operating Temperature
-25°C to + 80°C

Series

STX-3150 - 3.5mm Jack Slim Design with Switch PCB Mount

Number of Pins

3 - Pin
5 - Pin

Threading Option

C - Threaded Barrel
N - Non-Threaded Barrel

Contact Kycon for other Options

STX-3150 Series

Dimensions in mm

STX-3150-3C

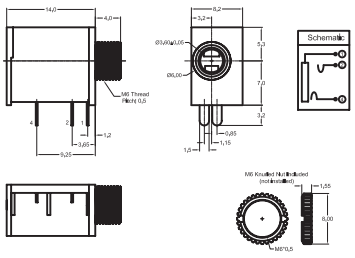
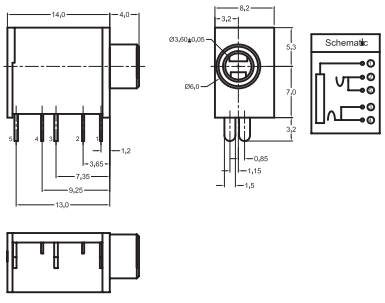
STX-3150-5N