


RS-485/RS-422 INTERFACE PUSH-PULL TRANSFORMERS



M6212 SERIES

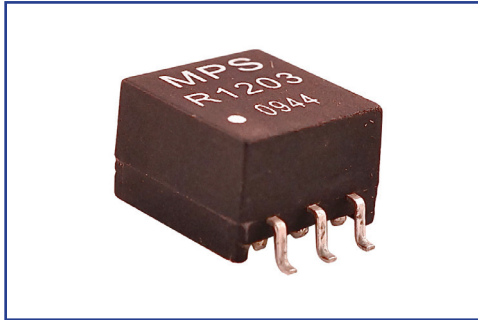

- Complies to UL1950, IEC950, and EN60950
- Designed for use with the Maxim™ MAX253 and MAX845 monolithic oscillator/power driver 3.3V / 5.0V source
- Construction complies with IEC 60950 Basic, Supplementary, and Reinforced isolation requirements
- UL60601 and VDE compliant designs available upon request
- Operating Temperature: -40°C to +85°C
- RoHS Compliant Product
- Custom Design Available


ELECTRICAL PARAMETERS @25°C

Part Number	Inductance (1-3) (μ H Typ)	Turns Ratio (1-3 : 6-4) ($\pm 5\%$)	ET (1-3) V μ Sec (Min)	DCR (1-3) (Ω Max)	L _L (1-3) (μ H Max)	C _{ww} (1-3 to 6-4) (pF Max)	Hi-Pot (1-3 to 6-4) (Vrms)
M6212-							
21	500	2CT : 1 CT	18	1.50	1.50	50	4500
83	500	2.67CT : 1CT	18	1.50	2.00	50	4500
43	500	1.33CT : 1CT	11	1.00	1.20	50	4500
34	500	1CT : 1.33CT	11	1.00	1.20	50	4500
11	500	1CT : 1CT	11	1.00	1.00	50	4500
12	500	1CT : 2CT	11	1.00	1.20	50	4500
38	500	1CT : 2.67CT	11	1.00	2.00	50	4500
122	250	1CT : 2.2CT	11	1.00	1.00	50	4500
23	500	1CT : 1.5CT	18	1.00	1.00	50	4500


NOTES:

- OCL, L_L, C_{ww} measured at 100KHz, 0.1Vrms

DIMENSIONS

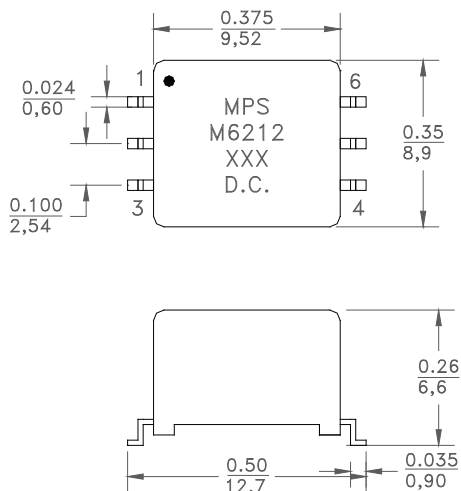

SCHEMATIC



Dimensions

Unless otherwise specified, all tolerances are:

inch: .XX : ± 0.015 .XXX : ± 0.004
mm: X.X : ± 0.38 X.XX : ± 0.10

Product performance is limited to specified parameters. Data is subject to change without prior notice.

Tel: 310-325-1043
Fax: 310-325-1044

www.mpsind.com
sales@mpsind.com