
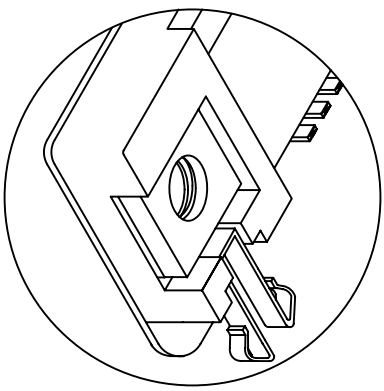

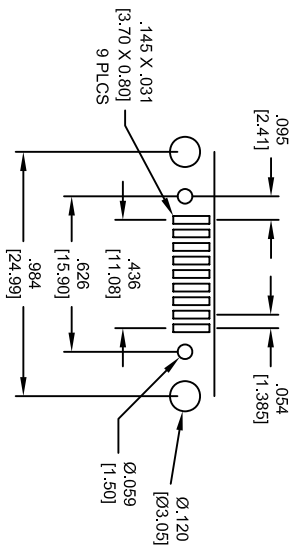
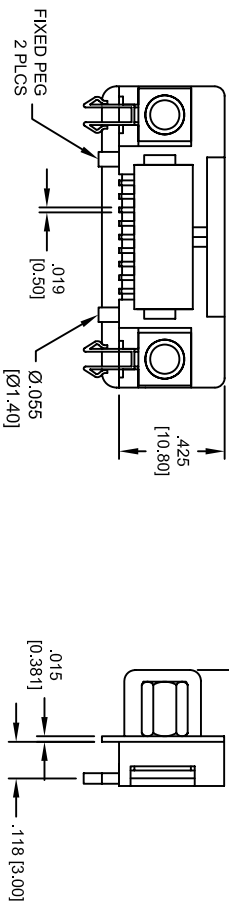


Rev	AWO #	Description	Date	Appr
-		RELEASED	06/29/05	

APPROVED: _____
 DATE: _____ TITLE: _____

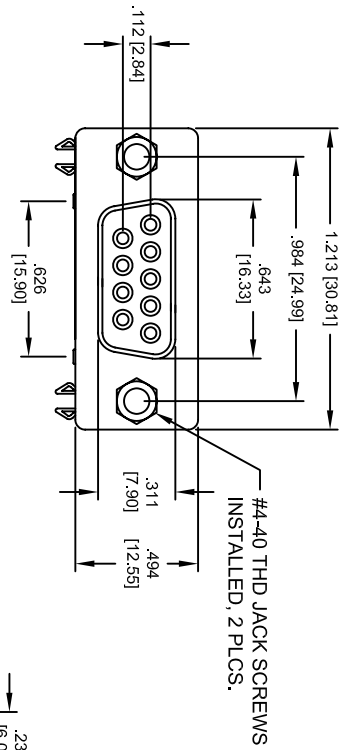

Fork Board Lock Type

SPECIFICATIONS:

Material:
 Insulator: Nylon 6T, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
Plating:
 Gold Flash over Nickel underplate on mating area, Tin over Copper underplate on SMT tails

Electrical:
 Operating voltage: 300 VAC max
 Current rating: 5 Amps max
 Contact resistance: 13 mohms max.
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
 Operating temperature: -55°C to +105°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260 for 5 sec.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HILES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XXX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS

DATE	DATE
06/29/05	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: D-SUB, 9 POS FEMALE, RIGHT ANGLE, SMT, JACK SCREWS INSTALLED

DRAWN	SS	DATE	SIZE	PART NO.	REV.
CHECKED			X	DE09-SS-25	
APPROVED					

REF: SCALE: NTS SHEET 1 OF 1