


IDC

- Industry compatible
- Competitively priced
- Selective gold plated contacts
- 2.54 mm pitch

IDC DIP PLUG (TRANSITION)

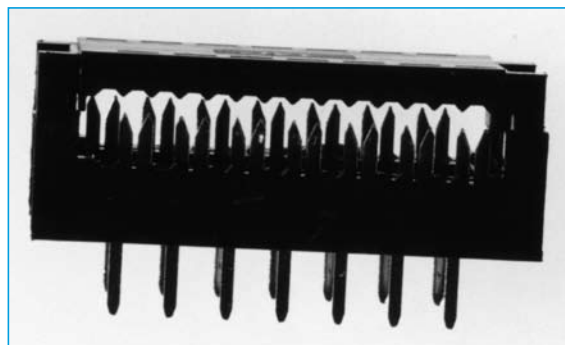



SPECIFICATION

Material & Finish

Contact Material:	Brass
Insulator Material:	PBT & Glass-Fibre Reinforced UL-94V-0
Current Rating:	1 A DC
Contact Resistance:	30M Ω Max
Insulator Resistance:	3000M Ω Min
Dielectric Withstanding	
Voltage:	500V AC for One Minute
Operating Temperature:	-40°C to + 105°C

Position	A	B
8	15.38	7.62
10	18.04	10.16
12	20.64	12.70
14	23.18	15.24
16	25.73	17.78
20	30.70	22.86
24	35.68	27.94
26	38.43	30.48
28	40.74	33.02
30	43.54	35.56
34	48.45	40.64
40	56.04	48.26
50	69.08	60.96
60	81.60	73.66
64	86.40	78.74

OUTLINE DRAWING

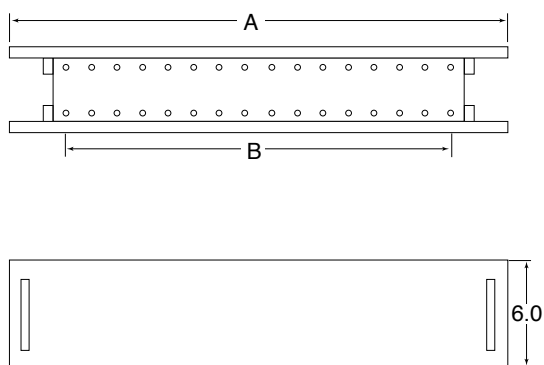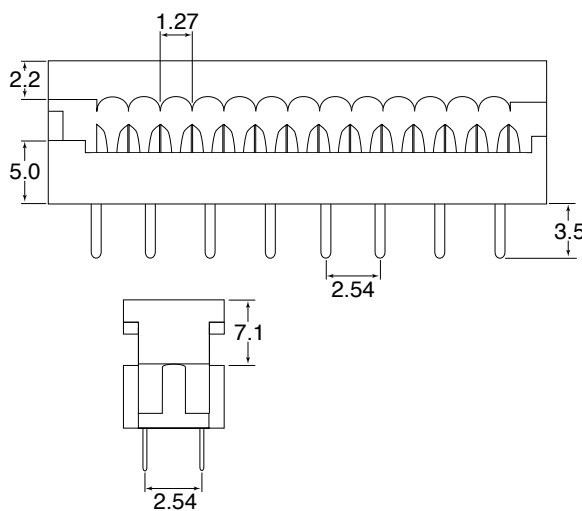

ORDERING INFORMATION

DBC	IDC	11	20	A	S	1
Dubilier Connectors	IDC Connector	Series	N° of Ways	Contact Material	Contact Plating	Colour
			06=6way	A=Brass	S= Selective Gold	1=Black
			08=8way			
			10=10way			
			14=14way			
			16=16way			
			20=20way			
			26=26way			
			30=30way			
			34=34way			
			40=40way			
			50=50way			
			60=60way			
			64=64way			