



FCS-5054 2MP 2.8mm: 1

Fixed Network Camera, 3-2MP, Outdoor, 802.3af PoE, 2.8mm/2.8mm, IR LEDs, WDR



1. Ethernet Port
2. Audio Output
3. Audio Input
4. Digital Input and Output

Key Features

- 2MP 2.8mm Micro SDHC/SDXC 2MP
- 3-2MP 2.8mm
- Weatherproof IP68-rated with wide operating temperature (-40°C to 50°C) for harsh environments
- 2MP 2.8mm 2.8mm WDR(2MP 2.8mm) 2MP
- Vandal-proof IK10-rated housing
- 2MP 30 m 2MP 2.8mm 2.8mm LED
- 2MP: H.264/MJPEG
- 2MP 2.8mm 2.8mm IR-2 2MP
- Power support: PoE (IEEE 802.3af)
- 2MP 64-2MP 2.8mm 2.8mm (OneSecure App 2MP)



System Specifications

Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet

IEEE 802.3u 100-BASE-TX, Fast Ethernet

IEEE 802.3af Power over Ethernet (PoE)

TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, IPv6, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP, UPnP, SNMP, Bonjour

**Image Sensor:**

3-Megapixel 1/3" Progressive Scan CMOS

Connectors and Cabling:

1 x RJ-45 10/100 Mbps PoE Port

1 x 3.5mm line out

1 x 3.5mm line in

I/O terminal block (1 DI/1 DO)

Modularity:

1 x MicroSDHC/ MicroSDXC card slot

Lens:

Vari-focal, Fixed iris, Manual focus, f2.8-12mm, F1.4

IR Cut Filter:

Removable infrared-cut filter for day & night function

IR LED:

15 IR LEDs for illumination up to 30m

Shutter Time:

1/5 ~ 1/10,000 sec

Angle of View:

70.5°-28.8°

Pan/Tilt/Zoom:

Digital Zoom to very high detail available on Software

Video Compression:

H.264 / MJPEG

Resolution:

3M (2048x1536)

Video Format:

RAW

Audio Compression:

G.711

Power:

Power Consumption: PoE Class 2 (IEEE802.3af) / 5.76 W (IR on)

Power Input: 802.3af PoE

Features

Video:

Image Setting: - Adjustable image size, quality and bit rate

- Configurable brightness, sharpness, contrast, saturation, white balance and exposure

- AGC/AWB/AES

- Back Light Compensation (BLC)

- Wide Dynamic Range (WDR), Superior WDR (110 dB)

- 2D Noise Reduction (2DNR)

Streaming: Up to 2 video streams

Audio:

Streaming: 2-way audio

Input/Output: line input, line output

Performance

Data Transfer Rate:

10/100Mbps

Storage Capacity:

SD/MicroSD memory card of up to 64GB

Frame Rate:

20 fps at 2048 x 1536; 30 fps at 1920 x 1080; 30 fps at 1280 x 720; 30 fps at 640 x 480; 15 fps at 320 x 240

Minimum illumination:

Color: 0.1 lux at F1.4

B/W: 0 lux (IR LED on)

Environment

Temperature (°C):

Operating: -40°C ~ 50°C

Humidity (Non-condensing):

Operating: 10% ~ 85%

Physical Specifications

Dimensions (W x D x H mm):

73 x 193 x 77 mm

Weight (g):

1007 g

Enclosure:

Weather proof IP68-rated housing

Vandal proof IK10-rated

Others

Approval and Compliance:


CE, FCC, ONVIF, IP67, IK10

Deployment:

Wall Mount

Operation Systems:

Microsoft Windows 8/7/Vista/XP

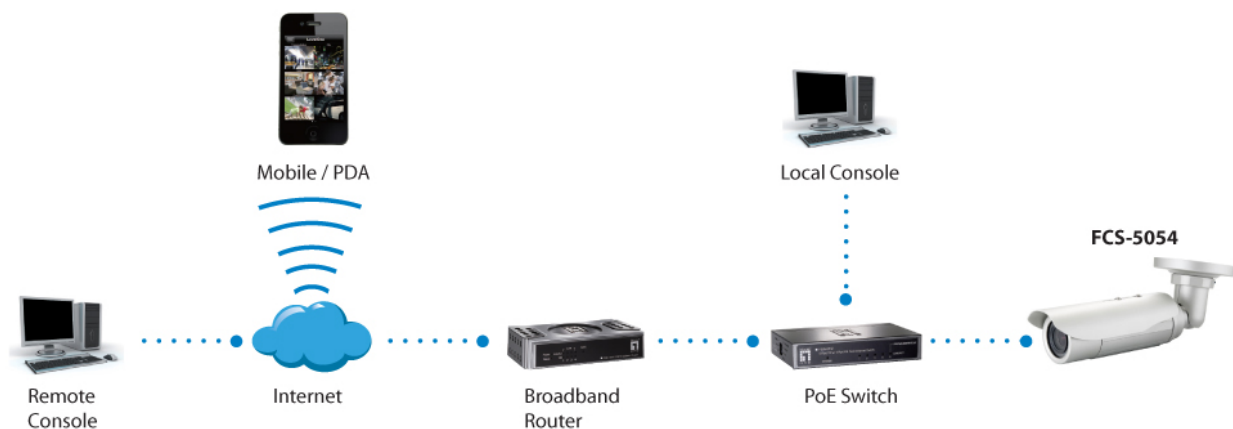



Order Information

FCS-5054

Package Contents

FCS-5054

Bracket

Mounting Kit

Screw Kit

Quick Installation Guide

Resource CD (User Manual, Utility, QIG)



CAS-2504
Pole Mount

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.