NEW!

Power Inductor – RA7338-AE

For Microchip 1600W Bus Balancer Reference Design



- High current, high inductance power inductors
- Designed for high current power supply applications
- Flat wire windings provide extremely low DC and AC resistance.
- Suitable for high temperature environments, up to 125°C ambient
- AEC-Q200 Grade 1 qualified (–40°C to +125°C)
- Shield has solderable tabs for additional mounting stability.

Core material Ferrite
Environmental RoHS compliant, halogen free
Terminations RoHS compliant tin-silver over copper
Shield tabs RoHS compliant bright tin over nickel over stainless steel
Weight 109 g
Ambient temperature –40°C to +125°C with Irms current,
Maximum part temperature +165°C (ambient + temp rise).
Storage temperature Component: –40°C to +85°C.
Tray packaging: –40°C to +80°C
Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)
Failures in Time (FIT) / Mean Time Between Failures (MTBF) 38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332
Packaging 9 parts per tray
PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See Doc787_PCB_Washing.pdf.

Part number	Inductance (µH)[1]		DCR (mOhms)[2]		SRF (MHz)	Isat (A)[3]			Irms (A)[4]	
	min	max	typ	max		10% drop	20% drop	30% drop	20°C rise	40°C rise
RA7338-AE	17.6	24.2	0.68	0.75	9.25	19	22	24	34.0	44.5

1. Inductance tested at 100 kHz, 0.1 Vrms on Agilent/HP 4192A.
2. DCR measured on a Keithley 580 micro-ohmmeter or equivalent.
3. DC current at 25°C that causes an inductance drop of 30% (typ) from its value without current. Click for temperature derating information.
4. Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings. Click for temperature derating information.
5. Electrical specifications at 25°C.

Refer to Doc 362 “Soldering Surface Mount Components” before soldering.

Coilcraft
www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1300-1 Revised 02/02/16

© Coilcraft Inc. 2016
This product may not be used in medical or high risk applications without prior Coilcraft approval.
Specification subject to change without notice.
Please check web site for latest information.

NEW!


RoHS COMPLIANT

Halogen Free


AEC Q200 +125°C


Power Inductor – RA7338-AE


Typical L vs Current

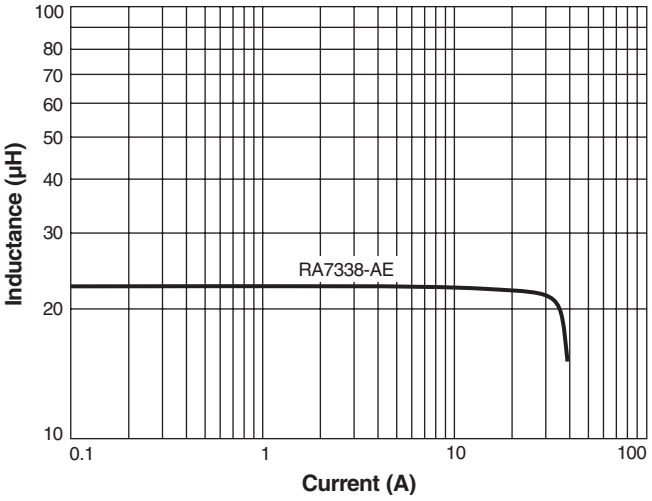


Typical L vs Frequency

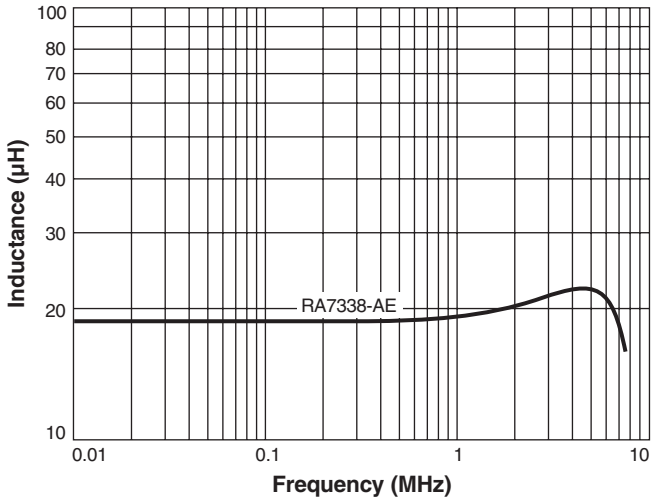

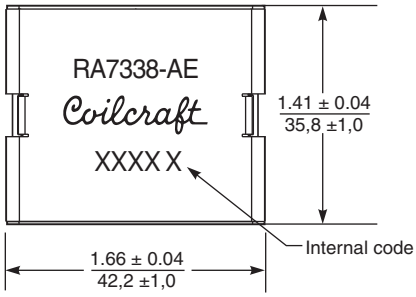

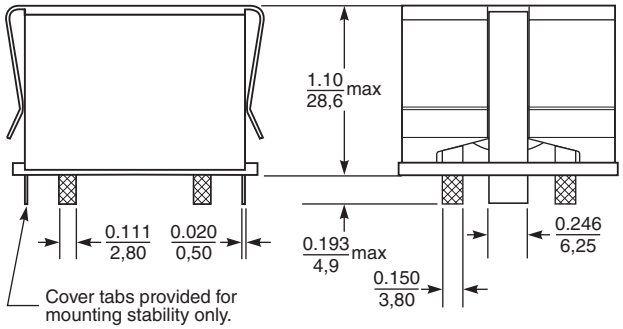

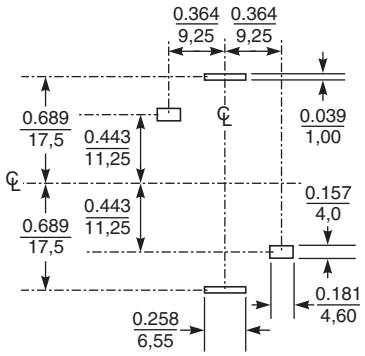

Dimensions are in inches / mm

Recommended PC board layout

Coilcraft
www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1300-2 Revised 02/02/16

© Coilcraft Inc. 2016
This product may not be used in medical or high risk applications without prior Coilcraft approval.
Specification subject to change without notice.
Please check web site for latest information.