



DSS22 THRU DSS225

SINGLE PHASE 2.0AMP SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER


Features

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency
- High temperature soldering guaranteed:
260°C/10 seconds, 0.375"(9.5mm) lead length,
5 lbs. (2.3kg) tension

Mechanical Data

- Case: SOD-123FL, molded plastic
- Terminals: plated leads solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Mounting position: Any

SOD-123FL

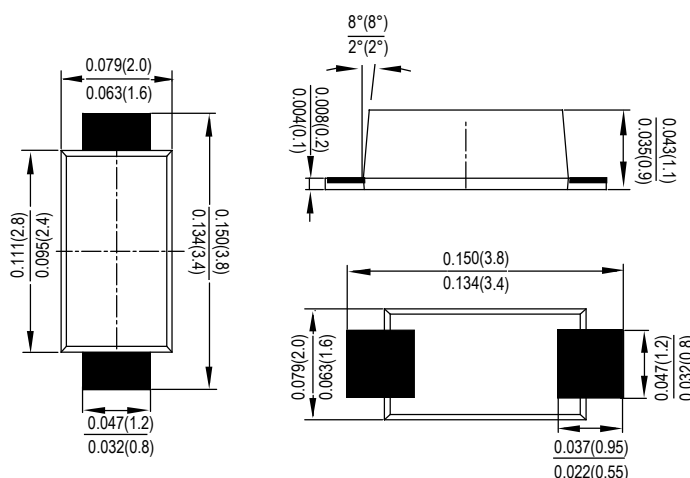

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single Phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

TYPE NUMBER	SYMBOL	DSS22	DSS23	DSS24	DSS25	DSS26	DSS28	DSS210	DSS215	DSS220	DSS225	UNITS
	Code	D22	D23	D24	D25	D26	D28	D210	D215	D220	D225	
Peak Repetitive Reverse Voltage	V _{RRM}	20	30	40	50	60	80	100	150	200	250	V
Working Peak Reverse Voltage	V _{RWM}											
DC Blocking Voltage	V _{DC}											
RMS Reverse Voltage	V _{RMS}	14	21	28	35	42	56	70	105	140	175	V
Average Rectified Output Current @T _A =90℃	I _O	2.0										A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	50										A
Forward Voltage per element @I _F =2.0A	V _{FM}	0.55			0.7		0.85		0.92		0.95	V
Peak Reverse Current @T _A =25℃ At Rated DC Blocking Voltage @T _A =100℃	I _R	0.1					0.05					mA
		10					5					
Typical junction capacitance (NOTE 1)	C _J	220			80							pF
Operating junction temperature range	T _J	-55to+150										℃
Operating and Storage Temperature Range	T _{STG}	-55to+150										℃

Note:1. Measured at 1MHZ and applied reverse voltage of 4.0V D.C.

DSS22 THRU DSS225

FIG. 1- FORWARD CURRENT DERATING CURVE

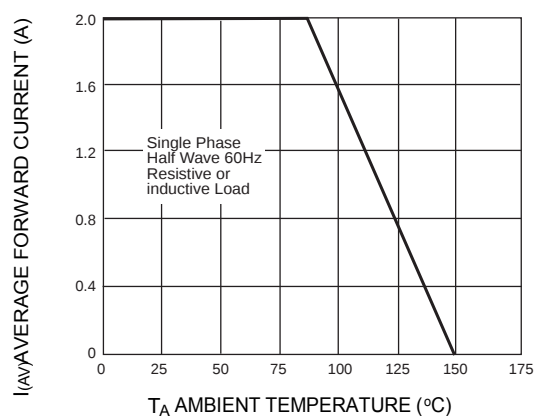


FIG. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

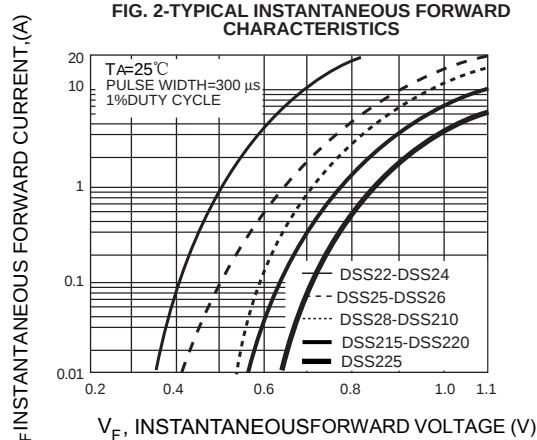


FIG. 3-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

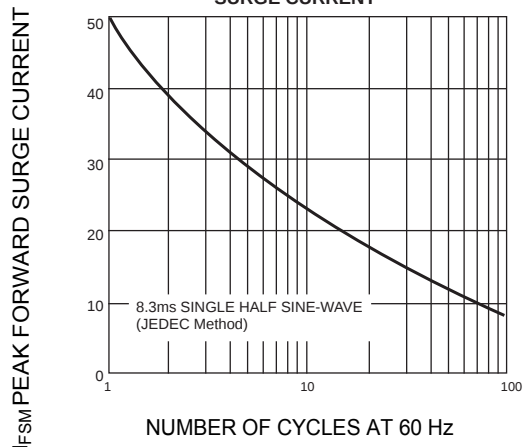


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

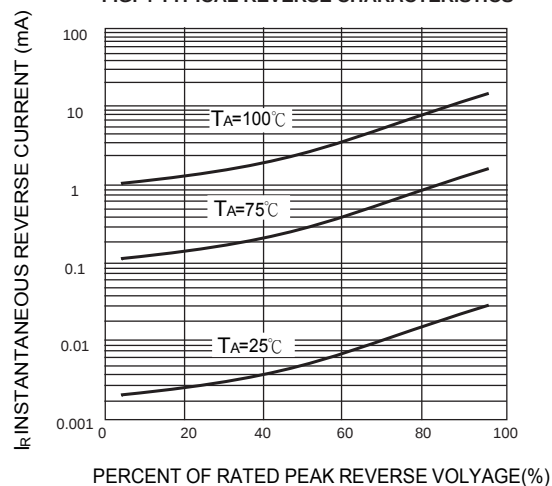


FIG. 5-TYPICAL JUNCTION CAPACITANCE

