

LM7088A/B Series - 0.70 inch 8x8 Dot Matrix LED Display



ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES




Features

- 20.20mm (0.70inch) digit high
- Dot size: Diameter 1.90mm
- Pitch: 2.54mm
- Wide viewing angle
- Range of emitted colors
- I.C. compatible
- Low power consumption
- White segment
- RoHS compliant

Available options

- Alternative emitting luminosity:
Standard or high brightness version
- Alternative emitted color
- Alternative segment color
- Alternative font
- Common Cathode is available
- Cropped terminal pins

Package Dimensions

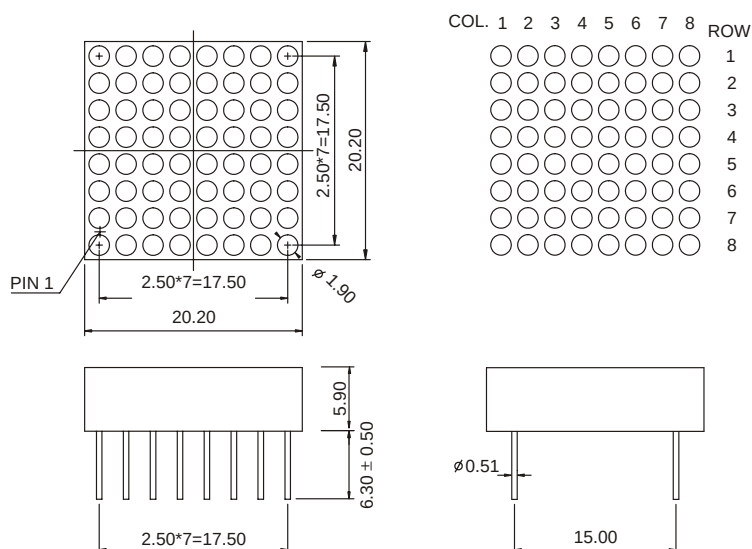


Notes:


1. All dimensions are in millimeters (inches), Tolerance is $\pm 0.25\text{mm}$ (0.01inch) unless other wise noted.
2. Specifications are subject to change without notice.
3. The gap between the reflector and PCB shall not exceed 0.25mm.

Internal Circuit Diagram

LM7088A (Common Cathode Row)

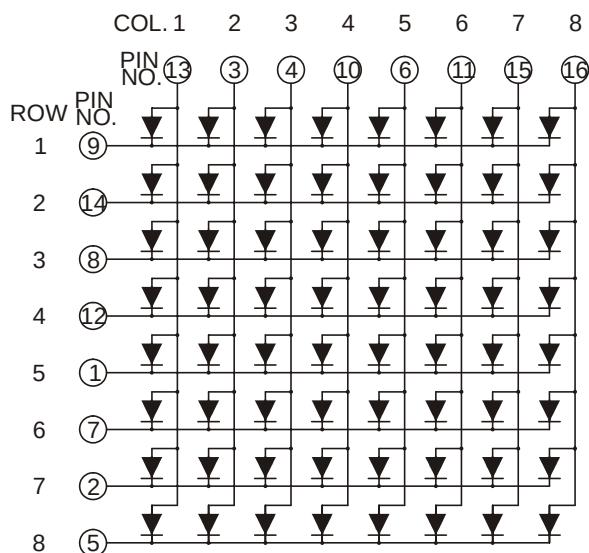

LM7088B (Common Anode Row)

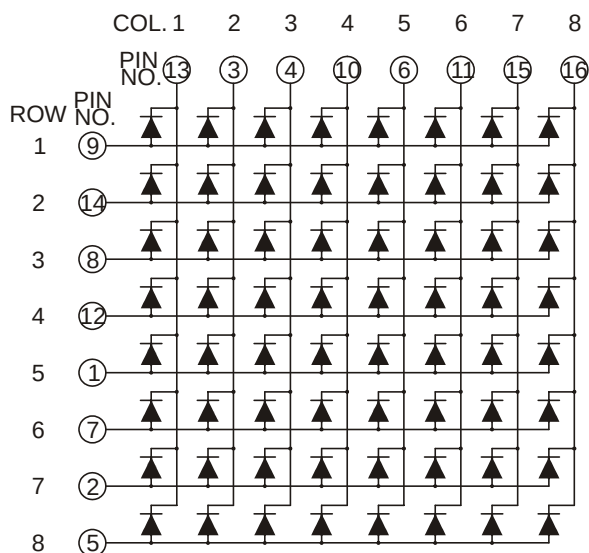

Selection Guide

Part No.		Chip			Iv@IF=20mA	
Common Cathode Row	Common Anode Row	Material	Color	WLD	One Dot	
					Min.	Typ.
LM7088AR	LM7088BR	GaAlAs	Super Red	627	8	10
LM7088AD	LM7088BD	GaAlAs	Hi-Red	627	18	25
LM7088AO	LM7088BO	GaAsP	Orange	610	7	9
LM7088AY	LM7088BY	GaAsP	Yellow	588	8	10
LM7088AG	LM7088BG	GaP	Green	568	7	9
LM7088AUR	LM7088BUR	AlGaInP	Ultra Red	627	30	45
LM7088AUO	LM7088BUO	AlGaInP	Ultra Orange	610	45	60
LM7088AUA	LM7088BUA	AlGaInP	Ultra Amber	605	30	45
LM7088AUY	LM7088BUY	AlGaInP	Ultra Yellow	595	30	45
LM7088AUG	LM7088BUG	AlGaInP	Ultra Green	573	30	45
LM7088APG	LM7088BPG	InGaIn	Pure Green	525	120	300
LM7088AUB	LM7088BUB	InGaIn	Ultra Blue	470	30	45
LM7088AUW	LM7088BUW	InGaIn	Ultra White	\	100	120
Unit:	\	\	\	nm	mcd	mcd

Electrical Characteristics & Absolute Maximum Ratings

Color		Electrical Characteristics ^[1]			Absolute Maximum Ratings ^[1]		
		V _F @ I _F =20mA ^[2]		Reverse Current VR=5V	Power Dissipation	DC Forward Current	Peak Forward Current ^[3]
		Typ.	Max.				
Super Red	Per Dot	1.8	2.2	30	60	25	100
Hi-Red	Per Dot	1.8	2.2	30	60	25	100
Orange	Per Dot	2.1	2.5	30	80	30	100
Yellow	Per Dot	2.1	2.5	30	80	30	100
Green	Per Dot	2.2	2.5	30	80	30	100
Ultra Red	Per Dot	1.9	2.6	30	60	30	100
Ultra Orange	Per Dot	2.0	2.6	30	65	30	100
Ultra Amber	Per Dot	2.0	2.6	30	65	30	100
Ultra Yellow	Per Dot	2.0	2.6	30	65	30	100
Ultra Green	Per Dot	2.1	2.6	30	75	30	100
Pure Green	Per Dot	3.5	4.0	30	110	30	100
Ultra Blue	Per Dot	3.5	4.0	30	120	30	100
Ultra White	Per Dot	3.5	4.0	30	120	30	100
Unit:	\	V	V	uA	mW	mA	mA

Notes:

1. At Ta = 25 °C.
2. Forward voltage at forward current = 20mA.
3. Peak forward current at 1/10 Duty Cycle, 0.1ms Pulse.