CHENMKO ENTERPRISE CO.,LTD

SURFACE MOUNT GLASS PASSIVATED

HIGH EFFICIENCY SILICON RECTIFIER

VOLTAGE RANGE 50 - 1000 Volts CURRENT 3.0 Amperes

HPL31PT

THRU

HPL38PT


Lead free devices

PROVISIONAL SPEC.

FEATURE

*Small Surface Mounting Type. (SMP)
* Low forward voltage, high current capability
* Low leakage current
* Glass passivated junction
* High temperature soldering guaranteed : 260°C/10 seconds at terminals


SMP

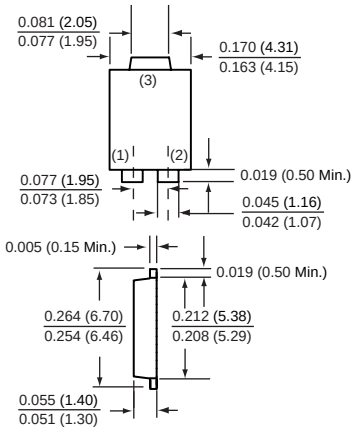

Dimensions in inches and (millimeters)

SMP

CIRCUIT



MAXIMUM RATINGES (At T_A = 25°C unless otherwise noted)

RATINGS	SYMBOL	HPL31PT	HPL32PT	HPL33PT	HPL34PT	HPL35PT	HPL36PT	HPL37PT	HPL38PT	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	300	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	210	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	300	400	600	800	1000	Volts
Maximum Average Forward Rectified Current T_L = 100°C	I_O	3.0								Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	100								Amps
Typical Junction Capacitance (Note 1)	C_J	70					50			pF
Operating and Storage Temperature Range	T_J, T_{STG}	-65 to +150								°C

ELECTRICAL CHARACTERISTICS (At T_A = 25°C unless otherwise noted)


CHARACTERISTICS		SYMBOL	HPL31PT	HPL32PT	HPL33PT	HPL34PT	HPL35PT	HPL36PT	HPL37PT	HPL38PT	UNITS
Maximum Instantaneous Forward Voltage at 3.0 A DC		V_F	1.0			1.3		1.5	1.7		Volts
Maximum DC Reverse Current	@ T_A = 25°C	I_R	5.0								uAmps
at Rated DC Blocking Voltage	@ T_A = 100°C		500								uAmps
Maximum Reverse Recovery Time (Note 2)		trr	50					70			nSec

2004-7

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts
2. Test Conditions : I_F = 0.5 A, I_R = -1.0 A, I_{RR} = -0.25 A

RATING CHARACTERISTIC CURVES (HPL31PT THRU HPL38PT)

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

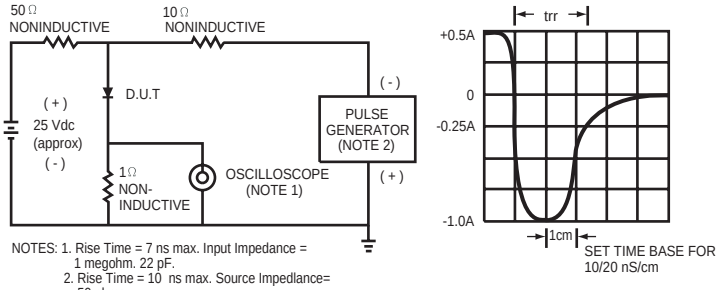

NOTES: 1. Rise Time = 7 ns max. Input Impedance = 1 megohm. 22 pF.
2. Rise Time = 10 ns max. Source Impedlance= 50 ohms.

FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE




FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

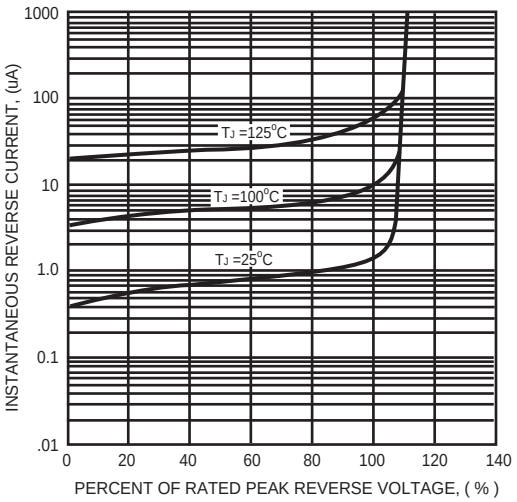


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

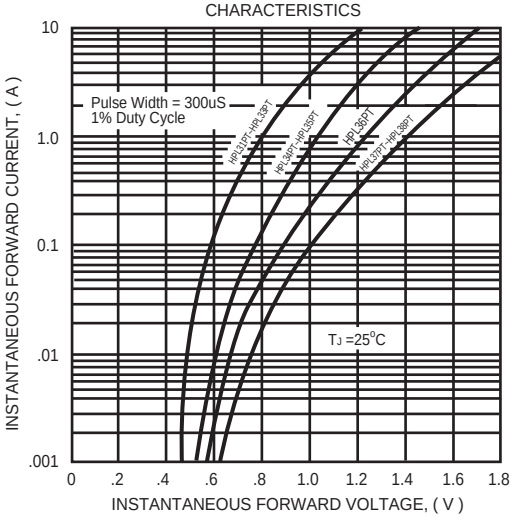


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

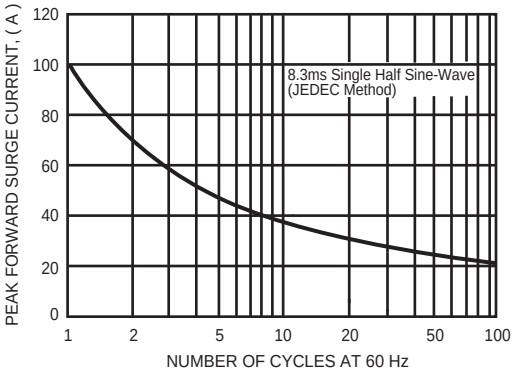


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

