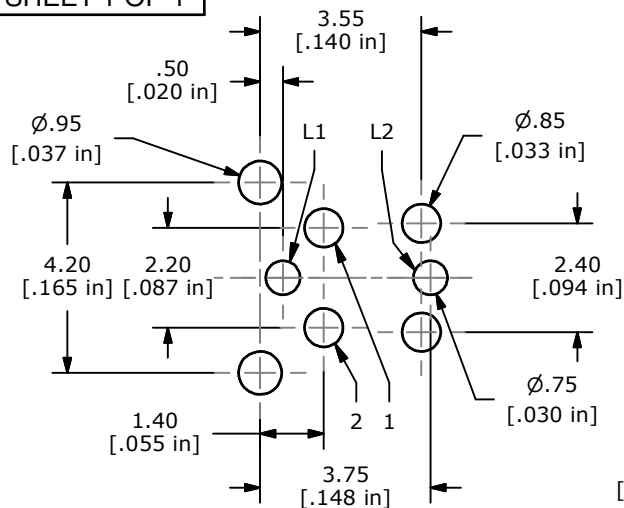


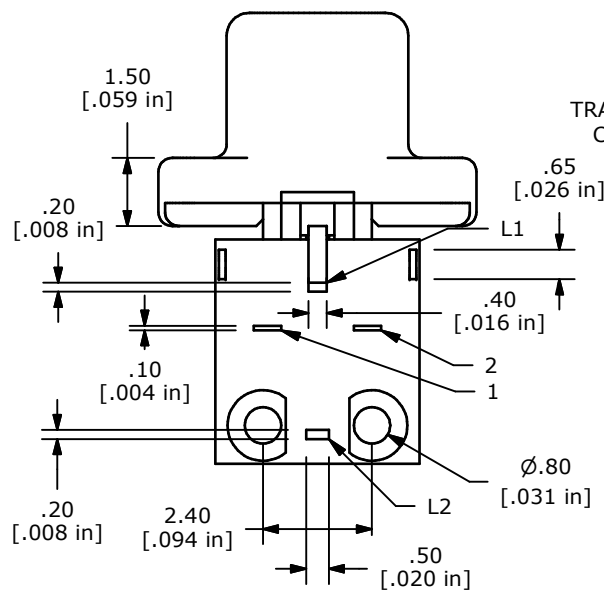
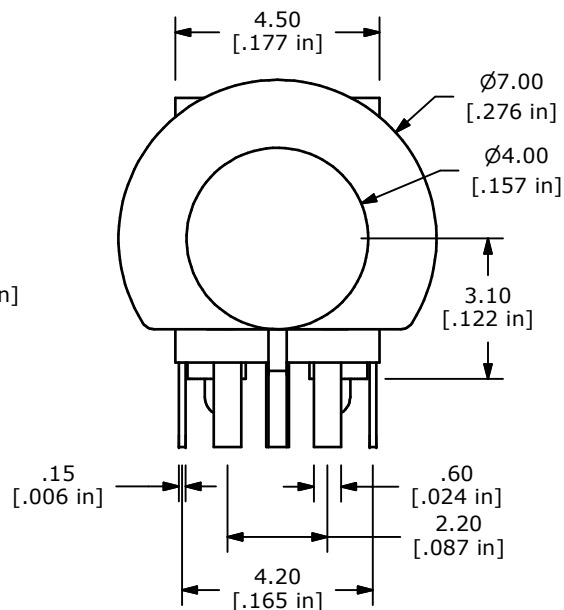
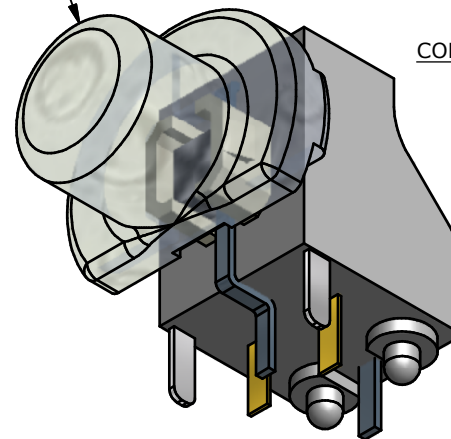

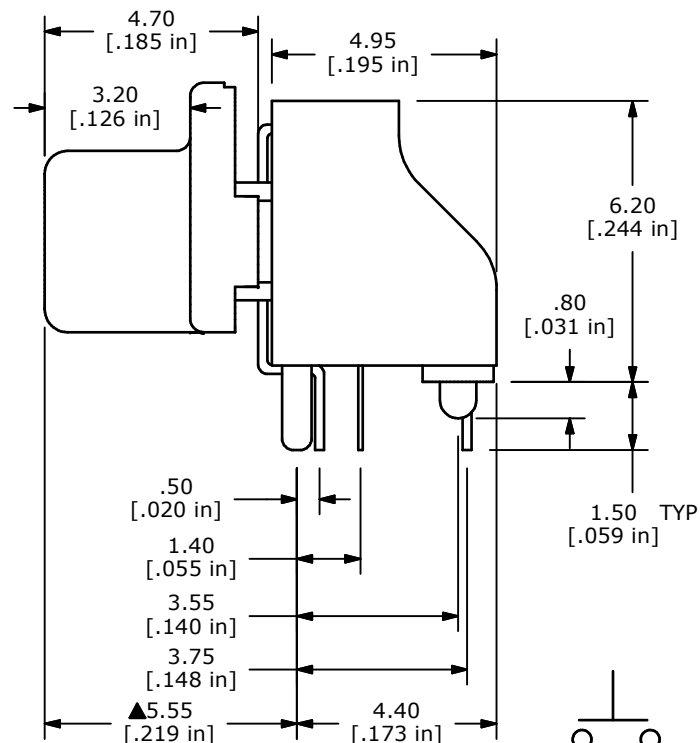


P.C.B. LAYOUT

LED SPECS	UNITS	RED
FORWARD CURRENT	mA	20 TYP.
FORWARD VOLTAGE	V	2.0 TYP. - 2.3 MAX.
LUMINOUS INTENSITY	mcd	80 TYP.

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- RATING: 12VDC @ 50mA
- CONTACT RESISTANCE: 500mΩ MAX.
- INSULATION RESISTANCE: 100MΩ MIN.
- ▲6. OPERATING FORCE: 160±50gf
- TRAVEL: 0.2±0.1mm
- OPERATING TEMPERATURE: -40°C TO 85°C
- OPERATING LIFE: 100,000 CYCLES
- ▲10. LED: RED
- ▲ DENOTES CRITICAL PARAMETERS
- 2002/95/EC (ROHS) COMPLIANT
- SWITCH TERMINAL PLATING: SILVER
- DIELECTRIC STRENGTH: 250 VAC FOR ONE MINUTE
- PACKAGING: 300 PIECES PER REEL

TRANSPARENT
CLEAR CAP

TITLE TL1270F160REQAT

A	21107	INITIAL RELEASE	4/17/13	EBP
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE 4/8/2013	DR EBP	DWG N325004	REV A
-------	------------------	-----------	----------------	----------