IXYS


Advance Technical Information

PolarHT™ Power MOSFET

IXTQ 110N10P
IXTT 110N10P


V_{DSS} = 100 V
I_{D25} = 110 A
$R_{DS(on)}$ = 15 mΩ

N-Channel Enhancement Mode




Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	T_J = 25°C to 175°C	100	V
V_{DGR}	T_J = 25°C to 175°C; R_{GS} = 1 MΩ	100	V
V_{GSM}		±20	V
I_{D25}	T_C = 25°C	110	A
$I_{D(RMS)}$	External lead current limit	75	A
I_{DM}	T_C = 25°C, pulse width limited by T_{JM}	250	A
I_{AR}	T_C = 25°C	60	A
E_{AR}	T_C = 25°C	40	mJ
E_{AS}	T_C = 25°C	1.0	J
dv/dt	$I_S \le I_{DM}$, di/dt ≤ 100 A/μs, $V_{DD} \le V_{DSS}$, $T_J \le 150°C$, R_G = 4 Ω	10	V/ns
P_D	T_C = 25°C	480	W
T_J		-55 ... +175	°C
T_{JM}		175	°C
T_{stg}		-55 ... +150	°C
T_L	1.6 mm (0.062 in.) from case for 10 s	300	°C
M_d	Mounting torque (TO-3P)	1.13/10	Nm/lb.in.
Weight	TO-3P	5.5	g
	TO-268	5.0	g

TO-3P (IXTQ)

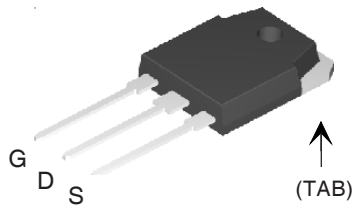

TO-268 (IXTT)



G = Gate D = Drain
S = Source TAB = Drain

Features

- International standard packages
- Unclamped Inductive Switching (UIS) rated
- Low package inductance
  - easy to drive and to protect

Advantages

- Easy to mount
- Space savings
- High power density

Symbol	Test Conditions (T_J = 25°C, unless otherwise specified)	Characteristic Values Min.	Typ.	Max.	
V_{DSS}	V_{GS} = 0 V, I_D = 250 μA	100			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, I_D = 250μA	2.5		5.0	V
I_{GSS}	V_{GS} = ±20 V_{DC}, V_{DS} = 0			±100	nA
I_{DSS}	$V_{DS} = V_{DSS}$, V_{GS} = 0 V			25	μA
	T_J = 150°C			250	μA
$R_{DS(on)}$	V_{GS} = 10 V, $I_D = 0.5\ I_{D25}$, Pulse test, t ≤ 300 μs, duty cycle d ≤ 2 %			15	mΩ

PolarHT™ DMOS transistors utilize proprietary designs and process. US patent is pending.


© 2004 IXYS All rights reserved

Symbol	Test Conditions	Characteristic Values (T_J = 25°C, unless otherwise specified) Min.	Typ.	Max.	
g_{fs}	V_{DS}= 10 V; I_D = 0.5 I_{D25}, pulse test	30	40		S
C_{iss}	V_{GS} = 0 V, V_{DS} = 25 V, f = 1 MHz		3550		pF
C_{oss}			1370		pF
C_{rss}			440		pF
$t_{d(on)}$	V_{GS} = 10 V, V_{DS} = 0.5 V_{DSS}, I_D = 60 A R_G = 4 Ω (External)		21		ns
t_r			25		ns
$t_{d(off)}$			65		ns
t_f			25		ns
$Q_{g(on)}$	V_{GS}= 10 V, V_{DS} = 0.5 V_{DSS}, I_D = 0.5 I_{D25}		110		nC
Q_{gs}			25		nC
Q_{gd}			62		nC
R_{thJC}				0.31	K/W
R_{thCK}	(TO-3P)		0.21		K/W

Source-Drain Diode

Symbol	Test Conditions (T_J = 25°C, unless otherwise specified)	Characteristic Values Min.	typ.	Max.	
I_S	V_{GS} = 0 V			110	A
I_{SM}	Repetitive			250	A
V_{SD}	I_F = I_S, V_{GS} = 0 V, Pulse test, t ≤ 300 µs, duty cycle d ≤ 2 %			1.5	V
t_{rr}	I_F = 25 A -di/dt = 100 A/µs		130		ns
Q_{RM}	V_R = 50 V		2.0		µC

TO-3P (IXTQ) Outline

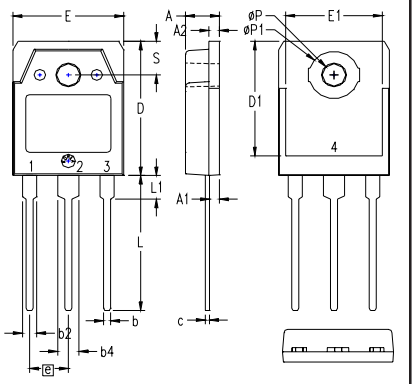


1 – GATE
2 – DRAIN (COLLECTOR)
3 – SOURCE (EMITTER)
4 – DRAIN (COLLECTOR)

SYM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	.185	.193	4.70	4.90
A1	.051	.059	1.30	1.50
A2	.057	.065	1.45	1.65
b	.035	.045	0.90	1.15
b2	.075	.087	1.90	2.20
b4	.114	.126	2.90	3.20
c	.022	.031	0.55	0.80
D	.780	.791	19.80	20.10
D1	.665	.677	16.90	17.20
E	.610	.622	15.50	15.80
E1	.531	.539	13.50	13.70
e	.215 BSC		5.45 BSC	
L	.779	.795	19.80	20.20
L1	.134	.142	3.40	3.60
øP	.126	.134	3.20	3.40
øP1	.272	.280	6.90	7.10
S	.193	.201	4.90	5.10

All metal area are tin plated.

TO-268 Outline

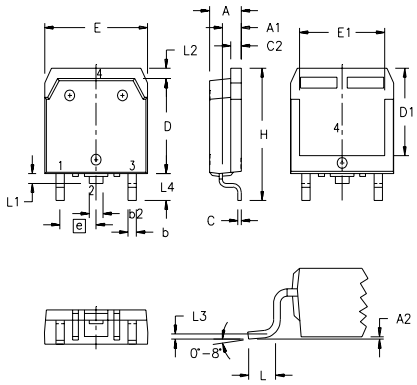

SYM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	.193	.201	4.90	5.10
A1	.106	.114	2.70	2.90
A2	.001	.010	0.02	0.25
b	.045	.057	1.15	1.45
b2	.075	.083	1.90	2.10
C	.016	.026	0.40	0.65
C2	.057	.063	1.45	1.60
D	.543	.551	13.80	14.00
D1	.488	.500	12.40	12.70
E	.624	.632	15.85	16.05
E1	.524	.535	13.30	13.60
e	.215 BSC		5.45 BSC	
H	.736	.752	18.70	19.10
L	.094	.106	2.40	2.70
L1	.047	.055	1.20	1.40
L2	.039	.045	1.00	1.15
L3	.010 BSC		0.25 BSC	
L4	.150	.161	3.80	4.10

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,881,106 5,017,508 5,049,961 5,187,117 5,381,025 6,162,665 6,306,728 B1 6,534,343 6,683,344 4,850,072 4,931,844 5,034,796 5,063,307 5,237,481 5,486,715 6,259,123 B1 6,404,065 B1 6,583,505 6,710,405B2

Fig. 1. Output Characteristics @ 25ºC

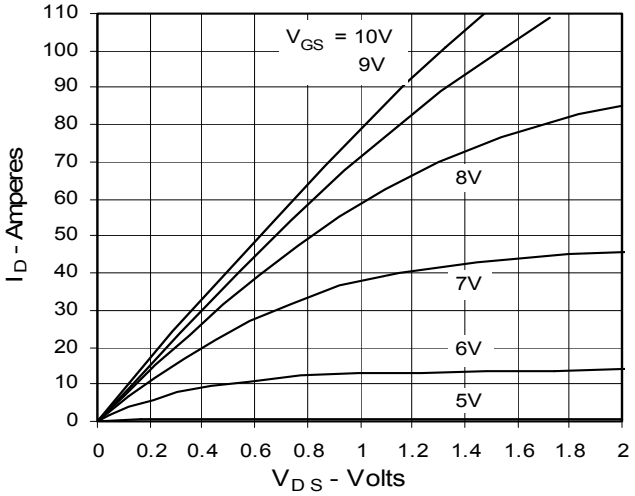


Fig. 2. Extended Output Characteristics @ 25ºC

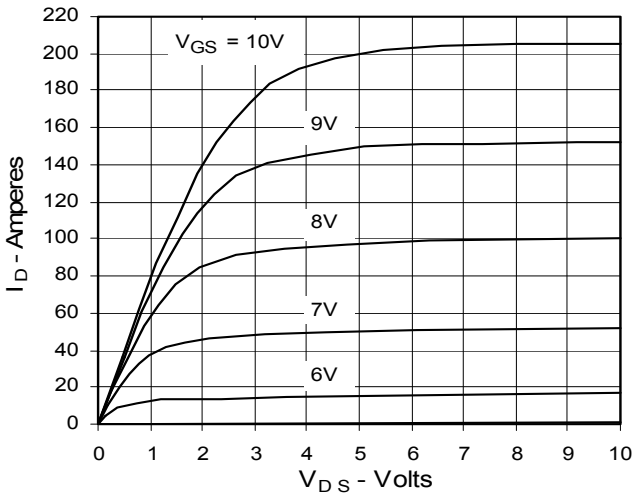


Fig. 3. Output Characteristics @ 150ºC

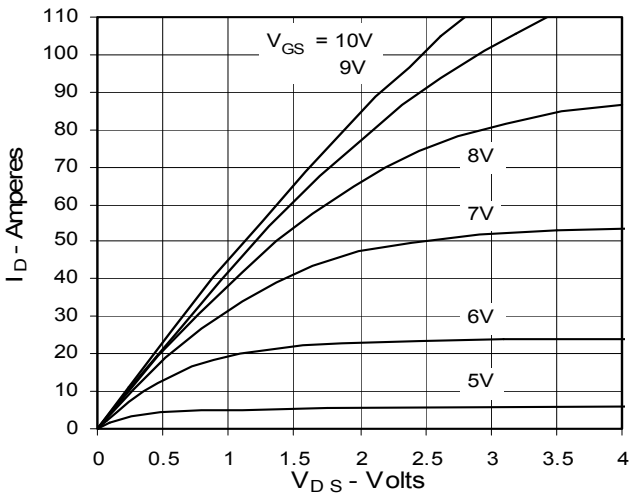


Fig. 4. $R_{DS(on)}$ Normalized to 0.5 I_{D25} Value vs. Junction Temperature

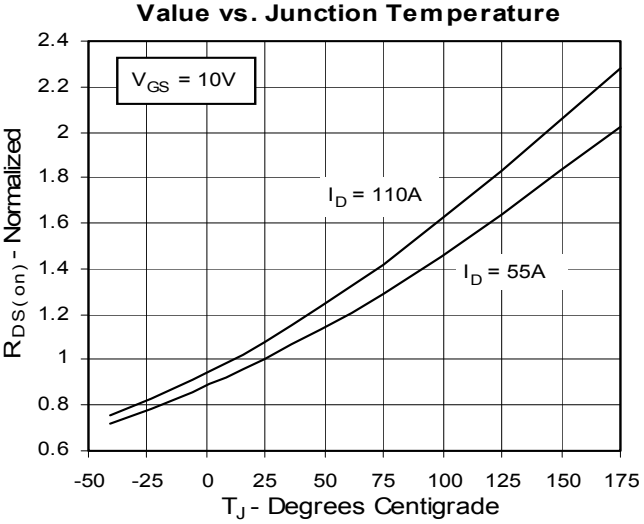


Fig. 5. $R_{DS(on)}$ Normalized to 0.5 I_{D25} Value vs. Drain Current


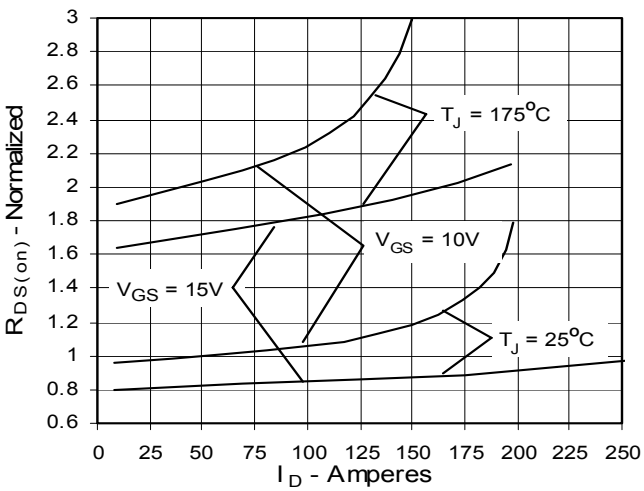


Fig. 6. Drain Current vs. Case Temperature

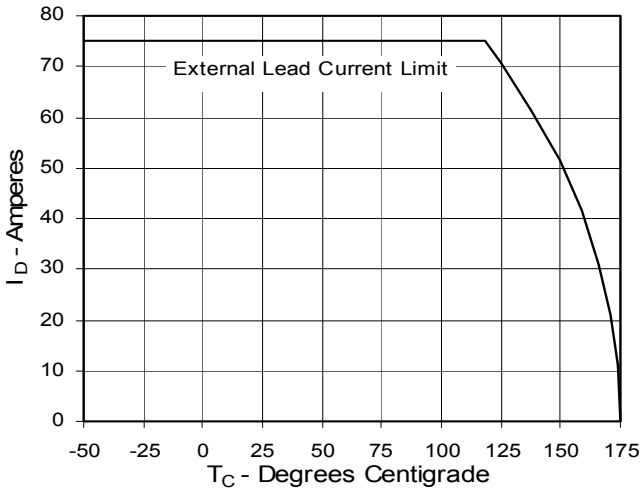

© 2004 IXYS All rights reserved

Fig. 7. Input Admittance

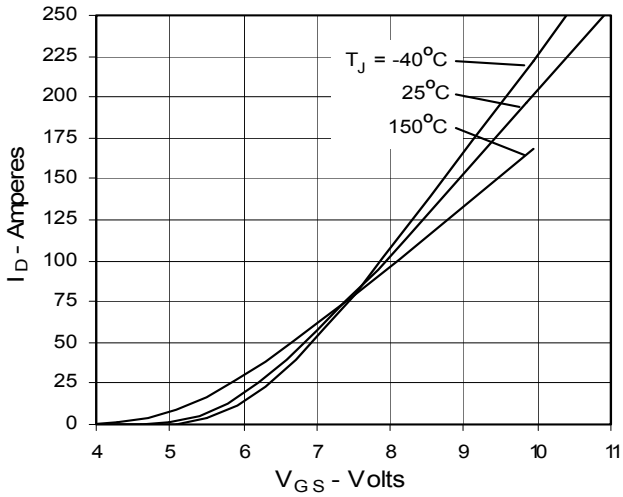


Fig. 8. Transconductance

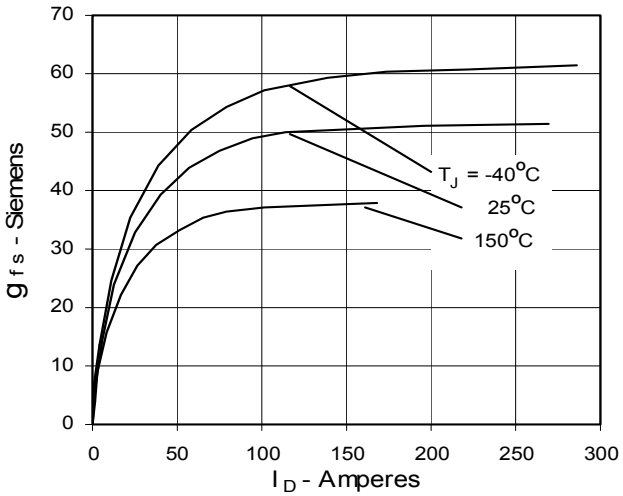


Fig. 9. Source Current vs. Source-To-Drain Voltage

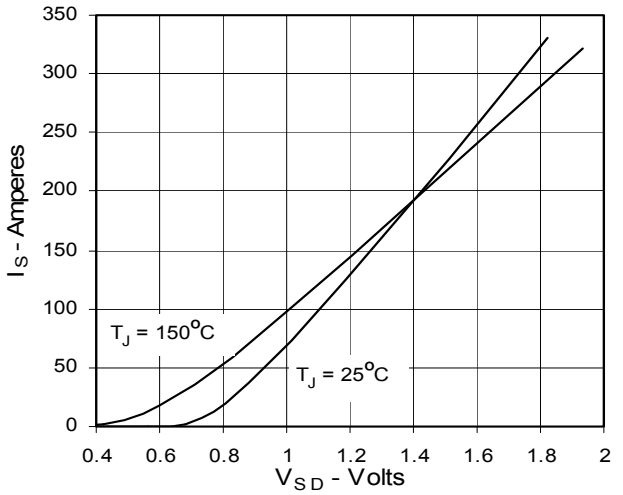


Fig. 10. Gate Charge

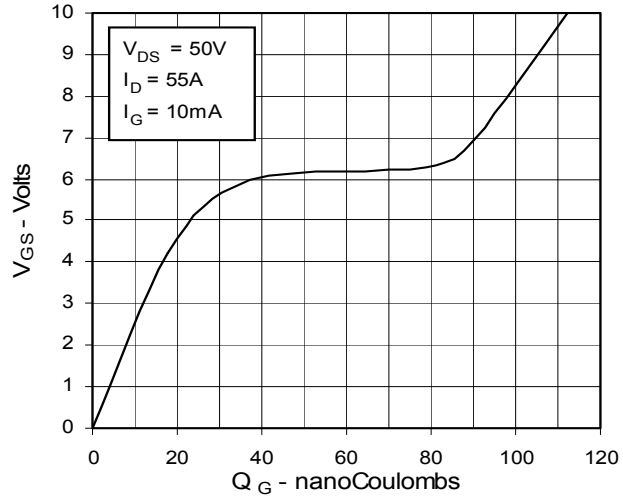


Fig. 11. Capacitance


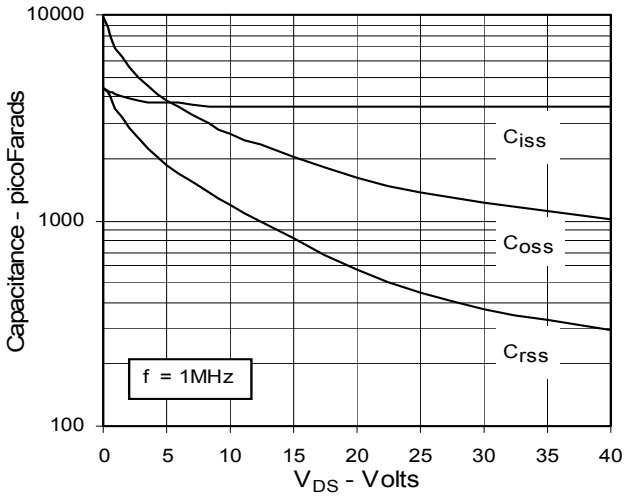



Fig. 12. Forward-Bias Safe Operating Area

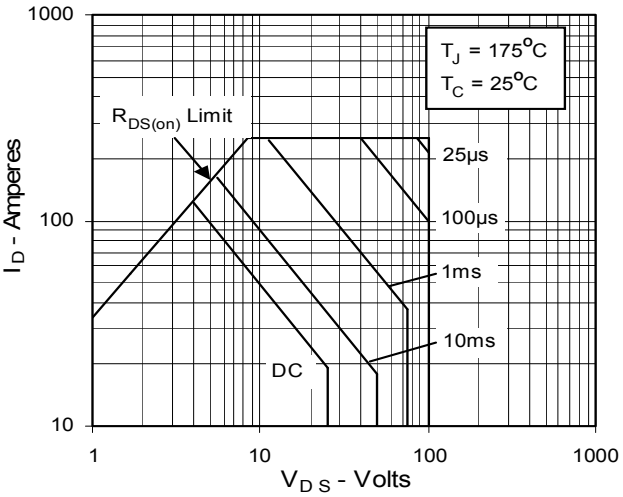

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,850,072 4,881,106 4,931,844 5,017,508 5,034,796 5,049,961 5,063,307 5,187,117 5,237,481 5,381,025 5,486,715 6,162,665 6,259,123 B1 6,306,728 B1 6,404,065 B1 6,534,343 6,583,505 6,683,344 6,710,405B2

Fig. 13. Maximum Transient Thermal Resistance

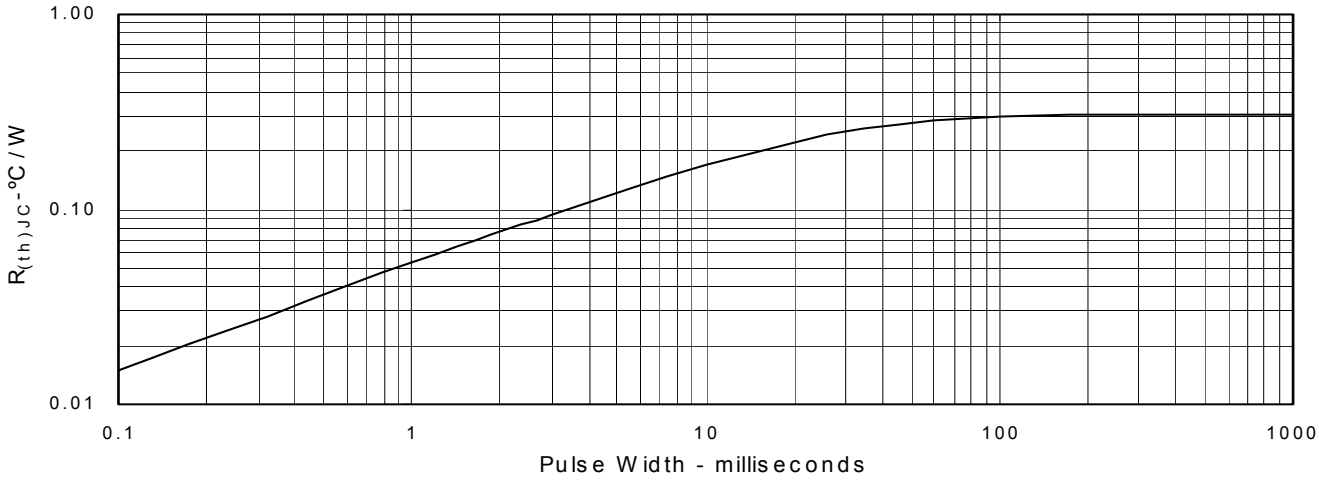

© 2004 IXYS All rights reserved