PASTERNACK®
THE ENGINEER'S RF SOURCE



600 mW Psat, 800 MHz to 5.5 GHz, Medium Power Broadband Amplifier, 20 dB Gain, 34 dBm IP3, SMA

TECHNICAL DATA SHEET PE15A3264

The PE15A3264 is a 25 dBm power amplifier designed for operation in the 0.8 GHz to 5.5 GHz frequency range. The amplifier utilizes high power devices that provide excellent linearity and high gain. High efficiency operation is achieved by using hybrid MIC designs and advanced GaAs PHEMT devices. The amplifier requires only +12 VDC power supply.

Features

- 0.8 GHz to 5.5 GHz Frequency Range
- P1dB +25 dBm typ.
- Psat 28 dBm typ
- IP3 34 dBm typ
- Gain 20 dB min.
- Gain Flatness +/-0.5 dB typ

Applications

- Medium Power Amplifier
- Driver Amp
- Military Communications
- Broadband Communication
- Test & Measurement

Electrical Specifications (TA = +25°C, DC Voltage = 12Volts, DC Current = 750mA)

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.8		5.5	GHz
Gain	20			dB
Output at 1 dB Compression Point	+24	+25		dBm
Saturation Output Power	+27	+28		dBm
Output 3rd Intercept Point	+33	+34		dBm
Input VSWR		1.8:1	2:1	
Output VSWR		1.8:1	2:1	
Operating DC Voltage		12		Volts
Operating DC Current		750	770	mA
Operating Temperature Range (OTR)	-30		+60	°C

Environmental Specifications

Temperature

Operating Range	-30 to +60 deg C
Shock	RTCS, DO-160C
Vibration	RTCS, DO-160C
Temperature Cycle	MIL-STD-883, METHOD 1010

Compliance Certifications (visit www.Pasternack.com for current document)

Not RoHS Compliant

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 600 mW Psat, 800 MHz to 5.5 GHz, Medium Power Broadband Amplifier, 20 dB Gain, 34 dBm IP3, SMA PE15A3264

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2015 Pasternack Enterprises All Rights Reserved



600 mW Psat, 800 MHz to 5.5 GHz, Medium Power Broadband Amplifier, 20 dB Gain, 34 dBm IP3, SMA

Plotted and Other Data

Notes:

- Values at +25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.
- Heat Sink Required for Proper Operation, Unit is cooled by conduction to heat sink.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 600 mW Psat, 800 MHz to 5.5 GHz, Medium Power Broadband Amplifier, 20 dB Gain, 34 dBm IP3, SMA PE15A3264

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2015 Pasternack Enterprises All Rights Reserved


PASTERNACK®
THE ENGINEER'S RF SOURCE




600 mW Psat, 800 MHz to 5.5 GHz, Medium Power Broadband Amplifier, 20 dB Gain, 34 dBm IP3, SMA

TECHNICAL DATA SHEET PE15A3264

Typical Performance Data

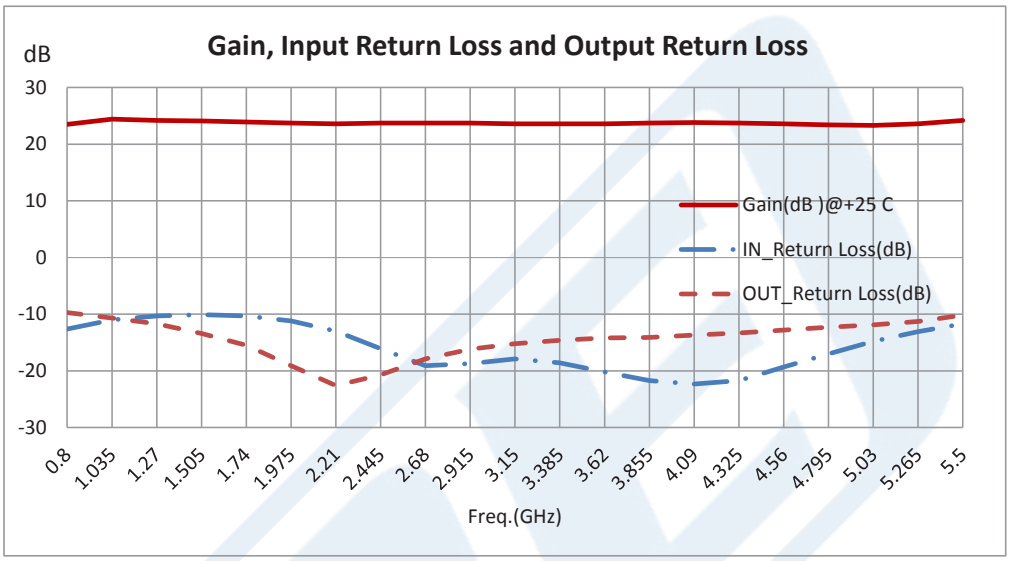

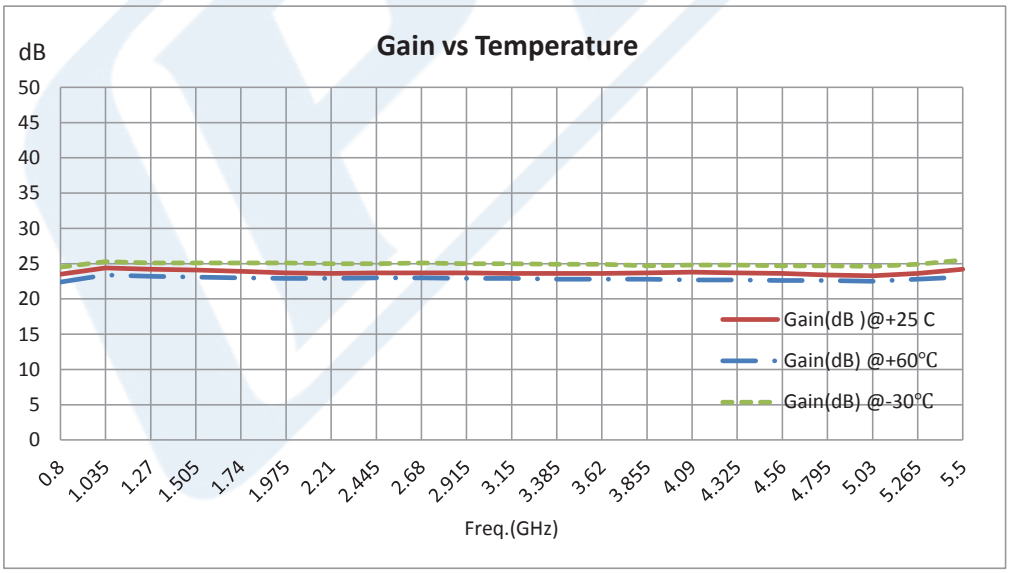

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 600 mW Psat, 800 MHz to 5.5 GHz, Medium Power Broadband Amplifier, 20 dB Gain, 34 dBm IP3, SMA PE15A3264

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com


ISO 9001 : 2008 Registered


© 2015 Pasternack Enterprises All Rights Reserved



600 mW Psat, 800 MHz to 5.5 GHz, Medium Power Broadband Amplifier, 20 dB Gain, 34 dBm IP3, SMA

TECHNICAL DATA SHEET PE15A3264

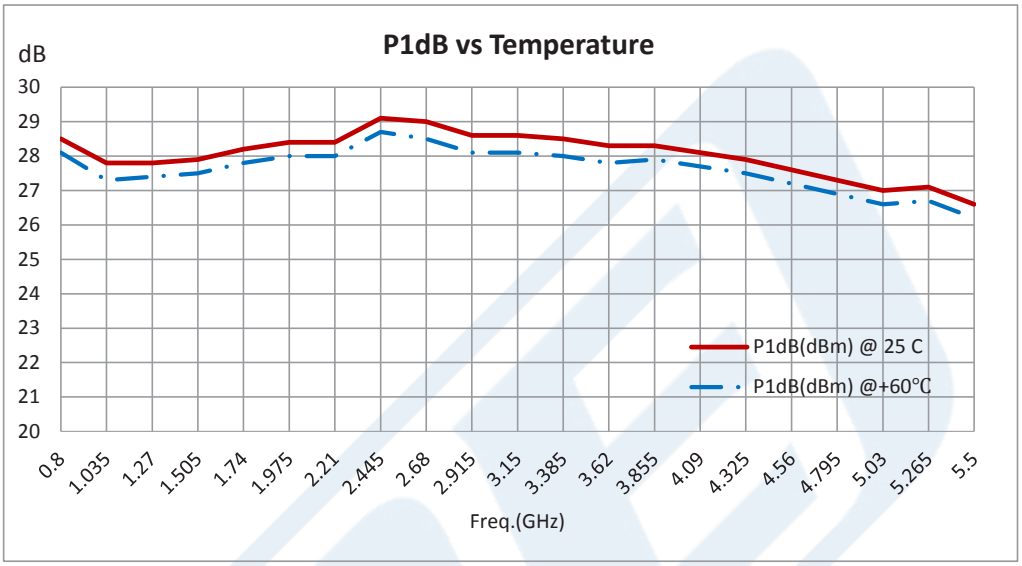

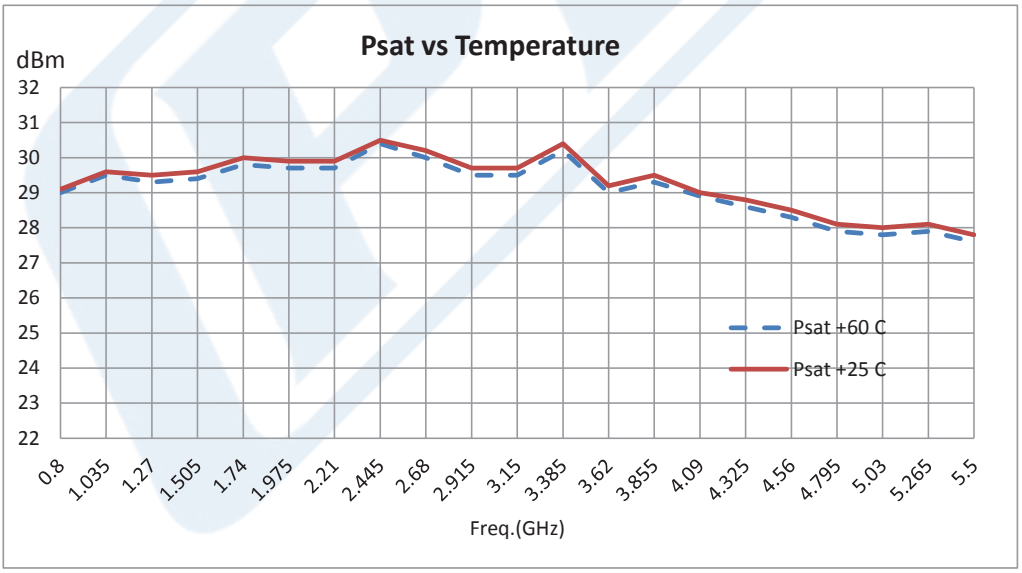

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 600 mW Psat, 800 MHz to 5.5 GHz, Medium Power Broadband Amplifier, 20 dB Gain, 34 dBm IP3, SMA PE15A3264

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2015 Pasternack Enterprises All Rights Reserved

PASTERNACK®
THE ENGINEER'S RF SOURCE



600 mW Psat, 800 MHz to 5.5 GHz, Medium Power Broadband Amplifier, 20 dB Gain, 34 dBm IP3, SMA

TECHNICAL DATA SHEET PE15A3264

600 mW Psat, 800 MHz to 5.5 GHz, Medium Power Broadband Amplifier, 20 dB Gain, 34 dBm IP3, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 600 mW Psat, 800 MHz to 5.5 GHz, Medium Power Broadband Amplifier, 20 dB Gain, 34 dBm IP3, SMA PE15A3264

URL: http://www.pasternack.com/5.5-ghz-medium-power-broadband-amplifier-20-db-gain-34-dbm-sma-pe15a3264-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.


Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2015 Pasternack Enterprises All Rights Reserved

PE15A3264 CAD Drawing

600 mW Psat, 800 MHz to 5.5 GHz, Medium Power Broadband Amplifier, 20 dB Gain, 34 dBm IP3, SMA

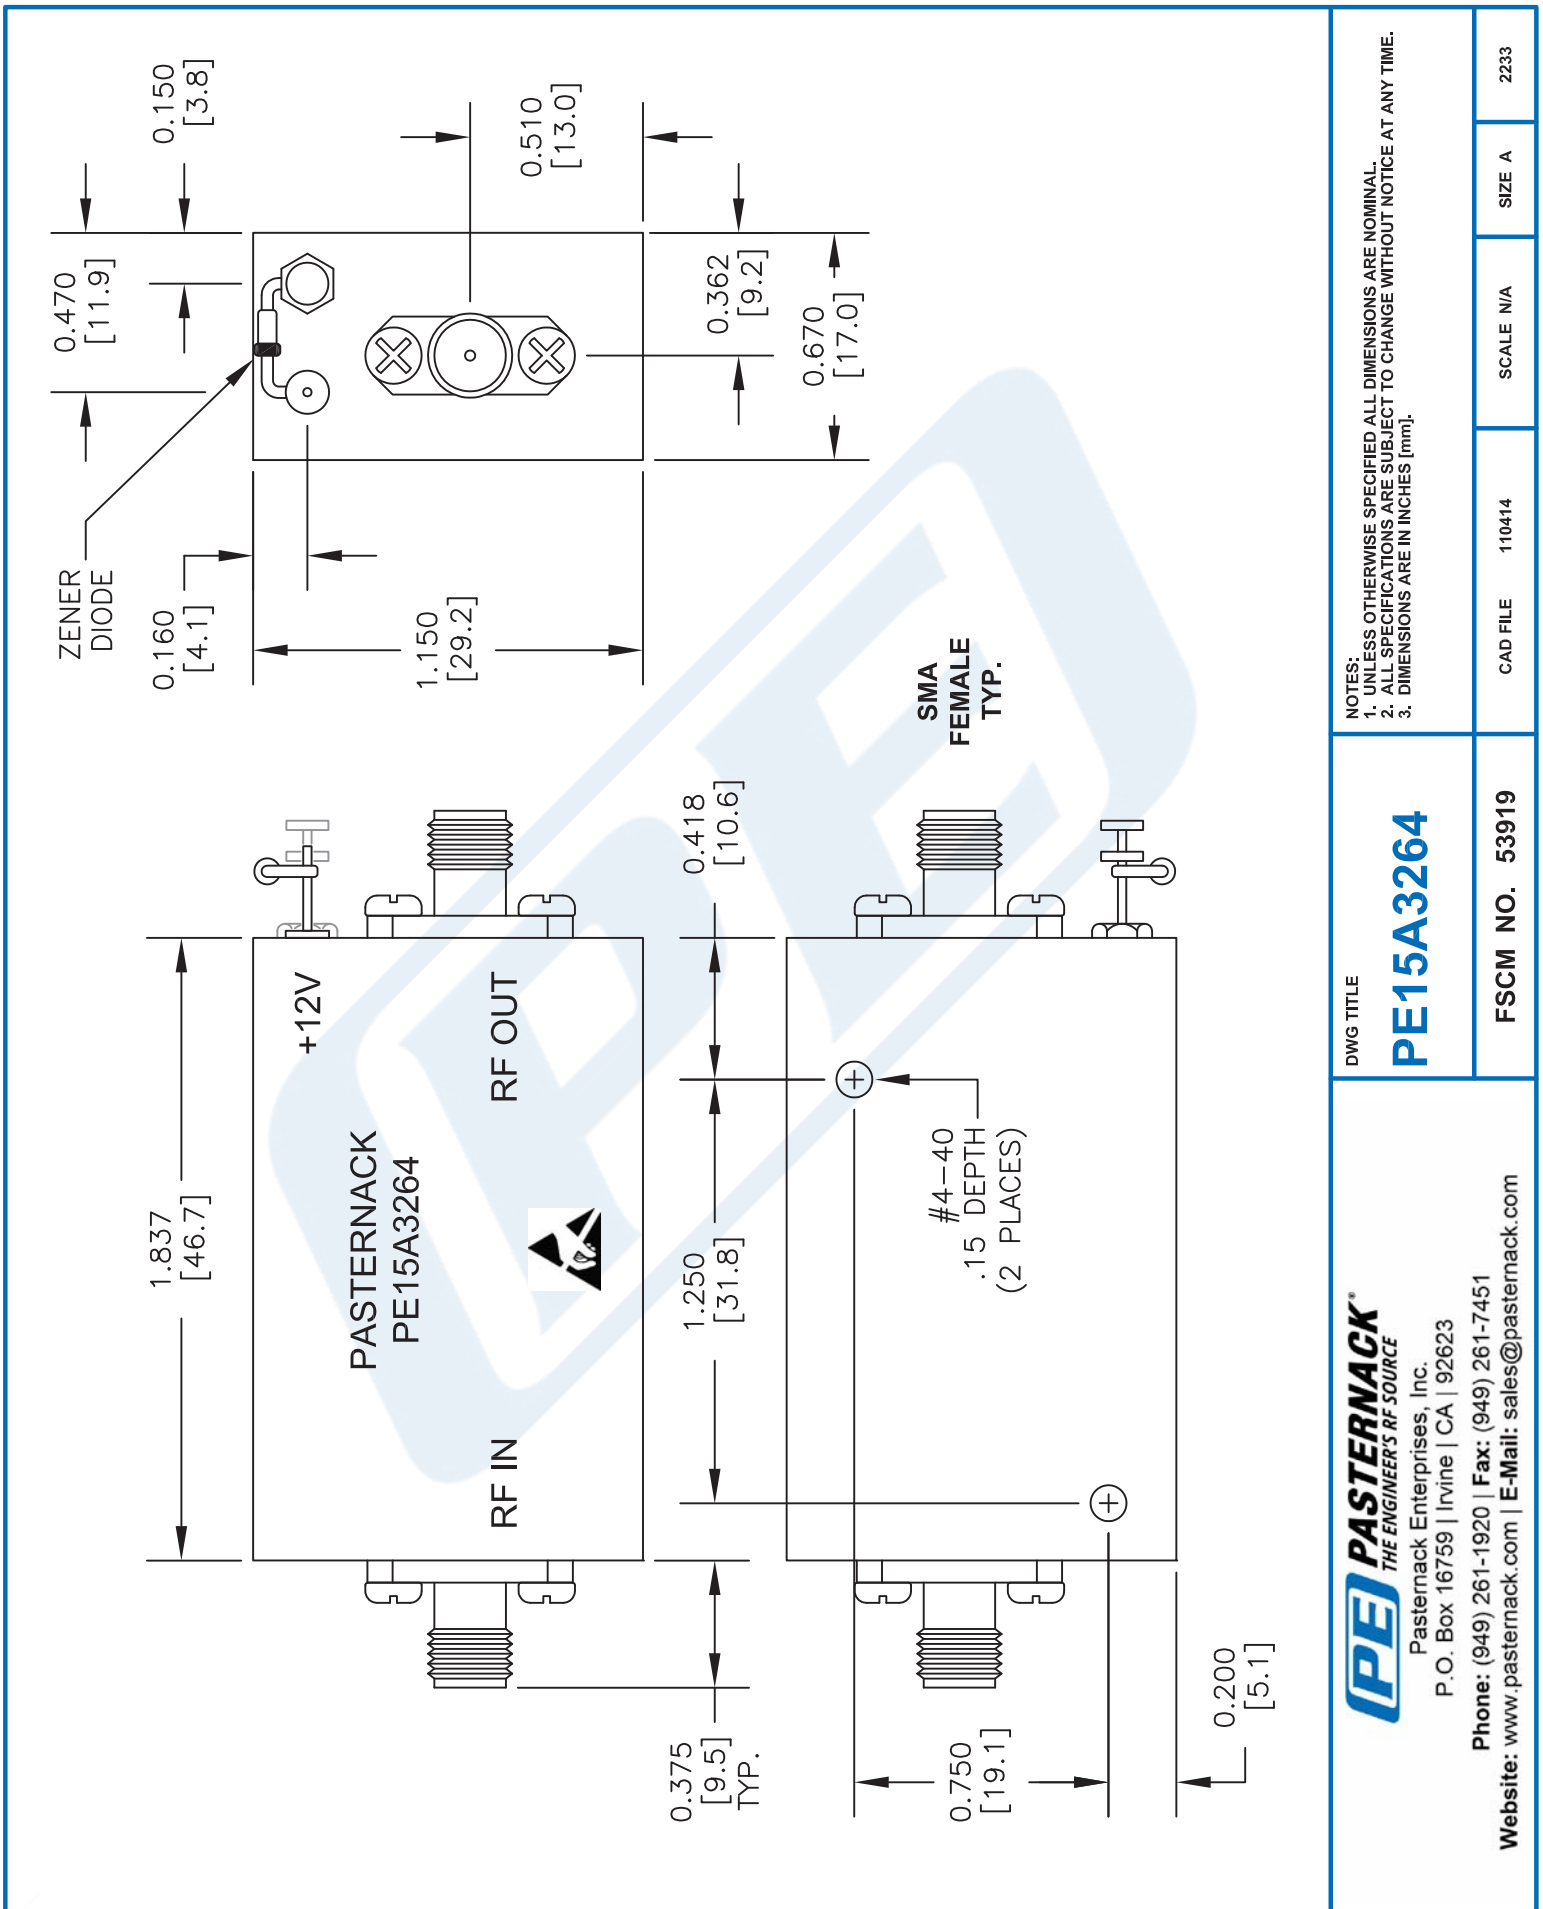

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

CAD FILE	SCALE	SIZE
110414	N/A	A

DWG TITLE: **PE15A3264**

FSCM NO. 53919

2233

PASTERNACK® THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

© 2015 Pasternack Enterprises All Rights Reserved