

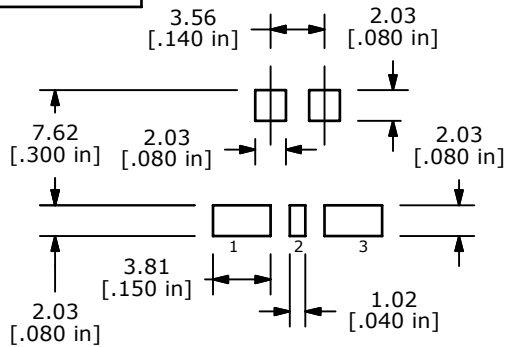
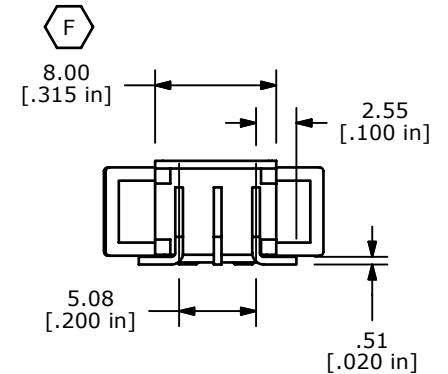
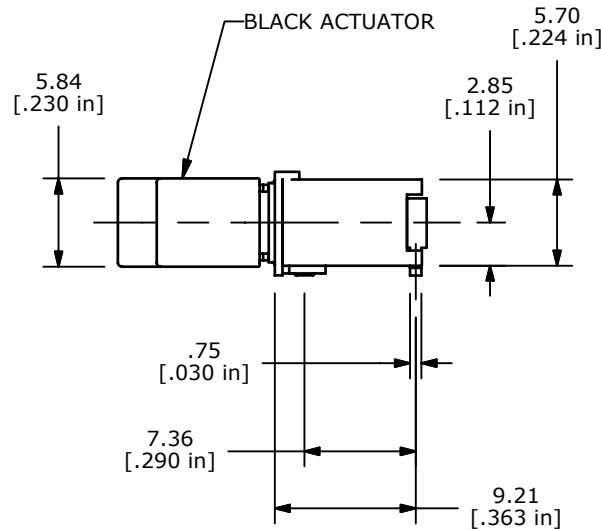
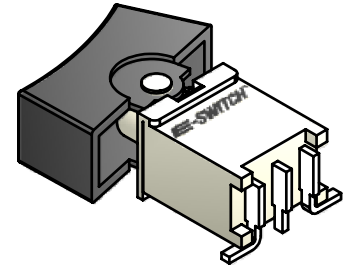


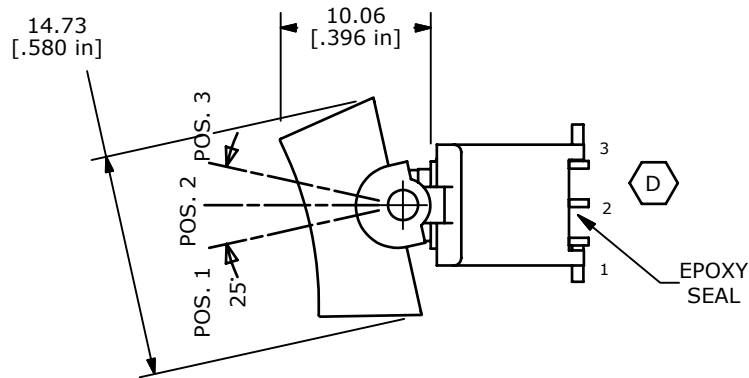

RECOMMENDED P.C.B. LAYOUT

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
(ON)	OFF	(ON)
2-3	OPEN	2-1

(ON)=MOMENTARY



NOTES:

- ALL DIMENSIONS IN MM[INCH].
- GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25
- TERM. NOS. FOR REFERENCE ONLY.
- ELECTRICAL LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- CONTACT MATERIAL: SILVER
- CONTACT RATING: 1 AMP @250 VAC
3 AMPS @120 VAC OR 28 VDC
- CONTACT RESISTANCE: 20MILLI-OHMS MAX. INITIAL @2-4 VDC
- OPERATING TEMPERATURE:-30°C TO 85°C.
- TERMINALS TO BE COPLANAR TO WITHIN 0.1[.004]
- ▲ DENOTES CRITICAL PARAMETER
- 2002/95/EC (ROHS) COMPLIANT
- PACKAGING: TAPE AND REEL, 450 PCS. PER REEL

F	18061	CHANGED BODY WIDTH (FROM 8.25)	4/17/08	BLR
E	16079	ADD PACKAGING NOTE	6/2/06	BLR
D	14777	REVISE TERMINAL NUMBERS	3/18/05	BLR
C	13748	CHANGE ACTUATOR	2/4/04	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE 400BWMSP4R2BLKSM6QE

SCALE 2:1

DATE 4/17/2008

DR BLR

DWG T460003

REV F