KEN SERIES HIGH PERFORMANCE SNAP-IN FILTERS

INTRODUCTIONS

1. Specially designed with ground choke providing most effective EMI suppression for high frequency noise (ranged 5MHz-25MHz).
2. Bleeder resistor can be added with suffix "-R" on part numbers.
3. With optional Y capacitor from 100pF to 3300pF.
4. All part numbers are UL recognized, CSA certified and VDE approved.
5. Optional side snap-in mounting clip type with suffix (H) on part numbers. for 03/06/10KENG3SA series.

COMPONENTS


PART NO.	L (mH)	Cx (uF)	Cy (pF)	Lg (uH)
03KENG3EA/03KENW3EA	3.1	0.1	2200	100
***08KENG3EA/08KENW3EA**	0.8			
****10KENG3EA/10KENW3EA**	0.4			
03KENG3SA/03KENW3SA	3.1			
06KENG3SA/06KENW3SA	0.8			
10KENG3SA/10KENW3SA	0.4			

* VDE approved to 6A 250V.
** UL, CSA & VDE approved to 9A 115/250 VAC.

MINIMUM INSERTION LOSS IN dB

PART NO.	FREQUENCY-MHz					
	.15	.50	1.0	5.0	10	30
COMMON MODE (L-G) IN 50 OHM SYSTEM						
03KENG3EA/03KENW3EA	15	20	25	40	40	45
08KENG3EA/08KENW3EA	10	15	20	35	40	50
10KENG3EA/10KENW3EA	7	12	18	30	30	50
03KENG3SA/03KENW3SA	15	20	25	40	40	40
06KENG3SA/06KENW3SA	7	15	20	35	40	40
10KENG3SA/10KENW3SA	4	12	18	30	30	45
DIFFERENTIAL MODE (L-L) IN 50 OHM SYSTEM						
03KENG3EA/03KENW3EA	5	12	15	40	50	45
08KENG3EA/08KENW3EA	5	10	15	45	40	50
10KENG3EA/10KENW3EA	4	12	18	30	30	50
03KENG3SA/03KENW3SA	10	20	35	40	45	40
06KENG3SA/06KENW3SA	10	25	40	35	40	40
10KENG3SA/10KENW3SA	10	25	35	30	30	45

ELECTRICAL SCHEMATIC

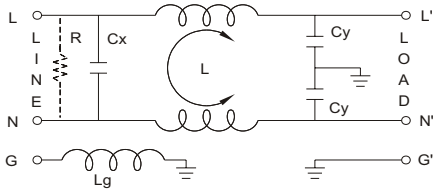


R: 1MΩ/-R ONLY

MECHANICAL CONSTRUCTION




G3EA



W3EA


SPECIFICATIONS

1. Maximum leakage current each
   line-to-ground @ 115VAC 60Hz: 0.20mA
   @ 250VAC 50Hz: 0.40mA
2. Hipot rating (one minute)
   line-to-ground: 2250VDC
   line-to-line: 1450VDC
3. Operating frequency: 50/60Hz
4. Rated voltage: 115/250VAC

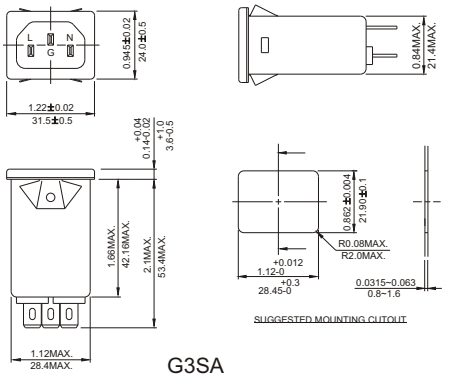


G3SA

Suggested thickness of mounting panel is from
0.0315 (0.8) to 0.063 (1.6) inch(mm) of mounting cutout

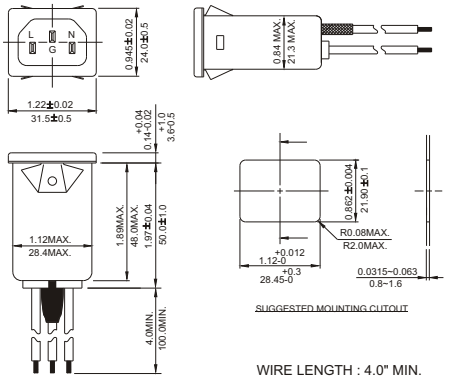

WIRE LENGTH : 4.0" MIN.

W3EA

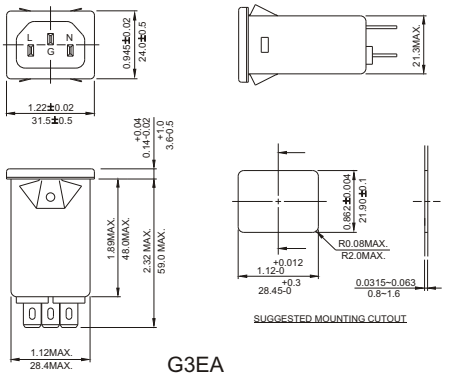

G3EA

UNIT: INCH / mm