

SHEET 1 OF 1

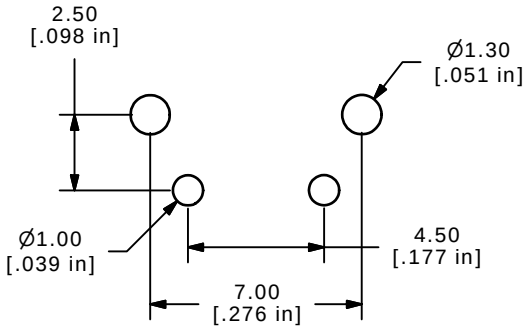



P.C.B. LAYOUT




CIRCUIT: SPST

ISOMETRIC

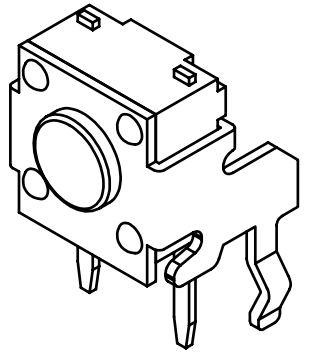

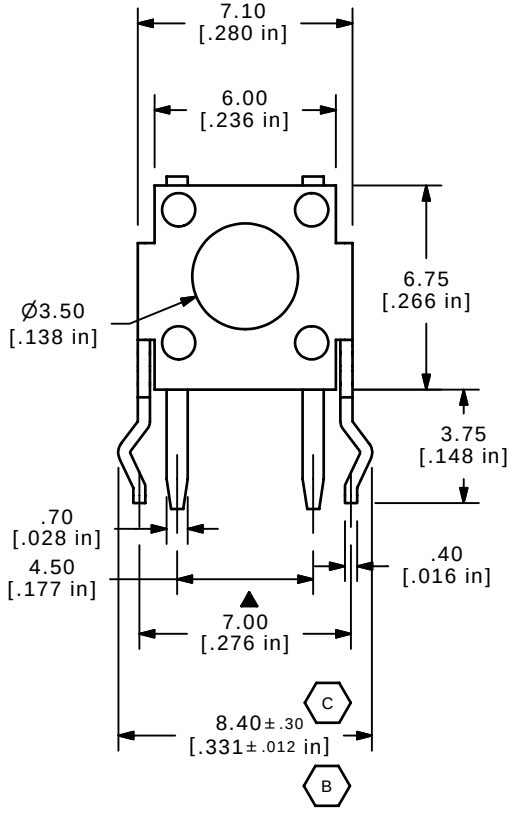

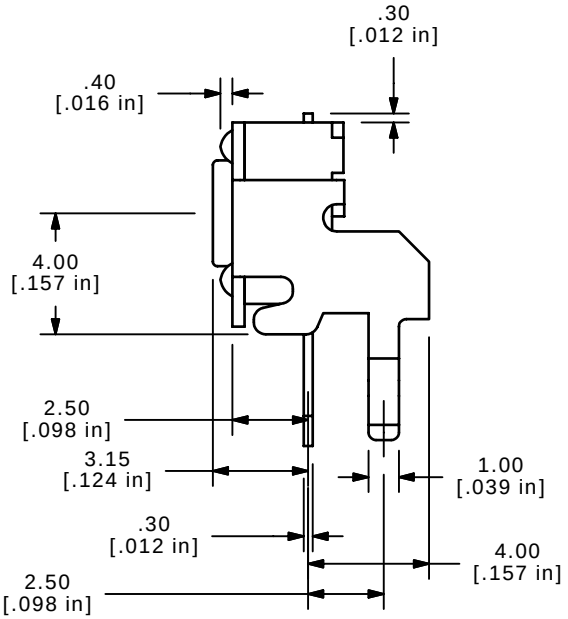

NOTES:
1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X= ±0.4
   X.XX= ±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 50VDC, 50mA
▲5. OPERATING FORCE: 160 ±50 gms
6. TRAVEL: 0.3mm ±0.15
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
▲9. MATERIAL: CONTACTS: SILVER
   HOUSING & ACTUATOR: TO MEET UL 94V0
10. ▲ DENOTES CRITICAL PARAMETER
11. 2002/95/EC (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
C	19502	CHANGED TOLERANCE	12/07/10	BGL
B	18677	LEG TOLERANCE WAS +/- 0.1	10/9/09	BLR
A	14702	RELEASED FOR PRODUCTION	2/18/05	AR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE TL1105WF160Q94V0

SCALE	DATE	DR	DWG	REV
4:1	10/9/2009	BLR	P020232	C