


- Frequency range 0.625MHz to 50.0MHz
- CMOS/TTL Output
- Supply Voltage 5.0 V or 3.3 VDC
- Integrated Phase Jitter 1ps typical
- Low cost unit



DESCRIPTION

G576 VCXOs, are packaged in a miniature 7mm x 5mm x 1.8mm 6 pad SMD package. Typical phase jitter for G series VCXOs is < 1ps, output CMOS/TTL. G series VCXOs use fundamental mode crystal oscillators. Applications include phase lock loop, SONET/ATM, set-top boxes, MPEG, audio/video modulation, video game consoles and HDTV.

SPECIFICATION


Frequency Range	Vdd = +3.3VDC: 0.625MHz to 50.0MHz
	Vdd = +5.0VDC: 1.0MHz to 50.0MHz
Supply Voltage:	+3.3 VDC ±5% or +5.0VDC±5%
Output Logic:	TTL/HCMOS
Integrated Phase Jitter:	1.0ps maximum 12kHz to 20MHz
Period Jitter RMS:	2.0ps typical
Period Jitter Peak to Peak:	14ps maximum
Phase Noise:	See table below
Initial Frequency Accuracy	
Tune to the nominal frequency with:	
	+3.3VDC: Vc= 1.65V ±0.2V
	+5.0 VDC: Vc= 2.5V ±0.2V
Output Voltage HIGH (1):	90% Vdd minimum
Output Voltage LOW (0):	10% Vdd maximum
Control Voltage Centre	
	+3.3VDC: 1.65V
	+5.0VDC: 2.5V
Control Voltage Range	
	+3.3VDC: 0.3V to 3.0V
	+5.0VDC: 0.5V to 4.5V
Pulling Range	
	+3.3VDC ±80ppm to ±120ppm (standard)
	+5.0VDC: ±80ppm to ±150ppm
	(±200ppm available)
Temperature Stability:	See table
Output Load:	CMOS = 15pF, TTL = 2 gates
Start-up Time:	10ms maximum, 5ms typical
Duty Cycle:	50% ±5% measured at 50% Vdd
Rise/Fall Times:	0.7ns typical (15pF load)
Current Consumption:	10 to 45mA, frequency dependent
Linearity:	10% maximum, 6% typical
Modulation Bandwidth:	10kHz minimum
Input Impedance:	1 MΩ minimum
Slope Polarity:	Monotonic and Positive. (An increase of control voltage always increases output frequency.)
(Transfer function)	
Storage Temperature:	-50° to +100°C
Ageing:	±5ppm per year maximum
RoHS Status:	Fully compliant

PHASE NOISE

Offset	Frequency 27.0MHz
10Hz	-70dBc/Hz
100Hz	-105dBc/Hz
1kHz	-132dBc/Hz
10kHz	-142dBc/Hz
1MHz	-150dBc/Hz

7 x 5 x 1.8mm 6 pad SMD

OUTLINE & DIMENSIONS

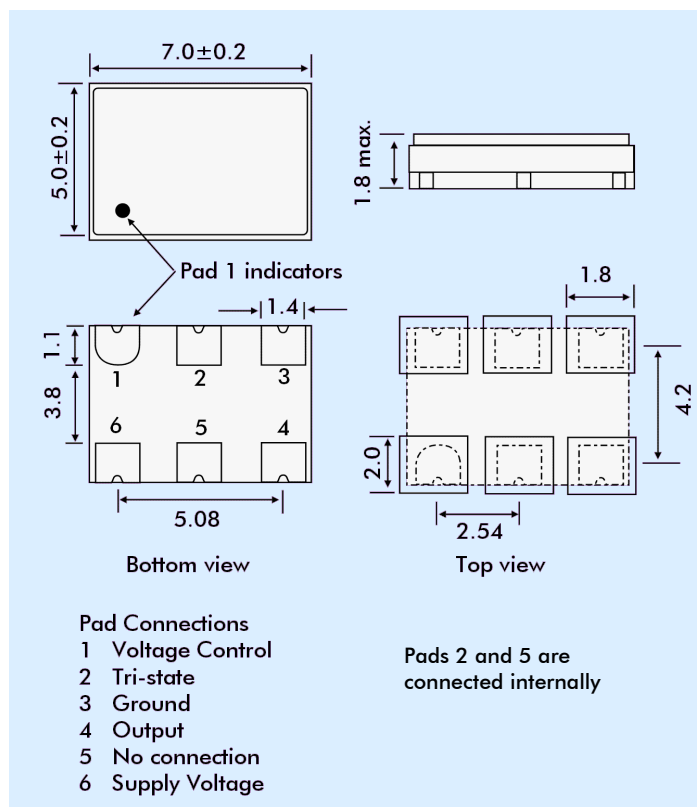

FREQUENCY STABILITY

Stability Code	Stability ±ppm	Temp. Range
A	25	0°~+70°C
B	50	0°~+70°C
C	100	0°~+70°C
D	25	-40°~+85°C
E	50	-40°~+85°C
F	100	-40°~+85°C

If non-standard frequency stability is required Use 'I' followed by stability, i.e. I20 for ±20ppm

PART NUMBERING

