




OUTLINE DIMENSION & BLOCK DIAGRAM

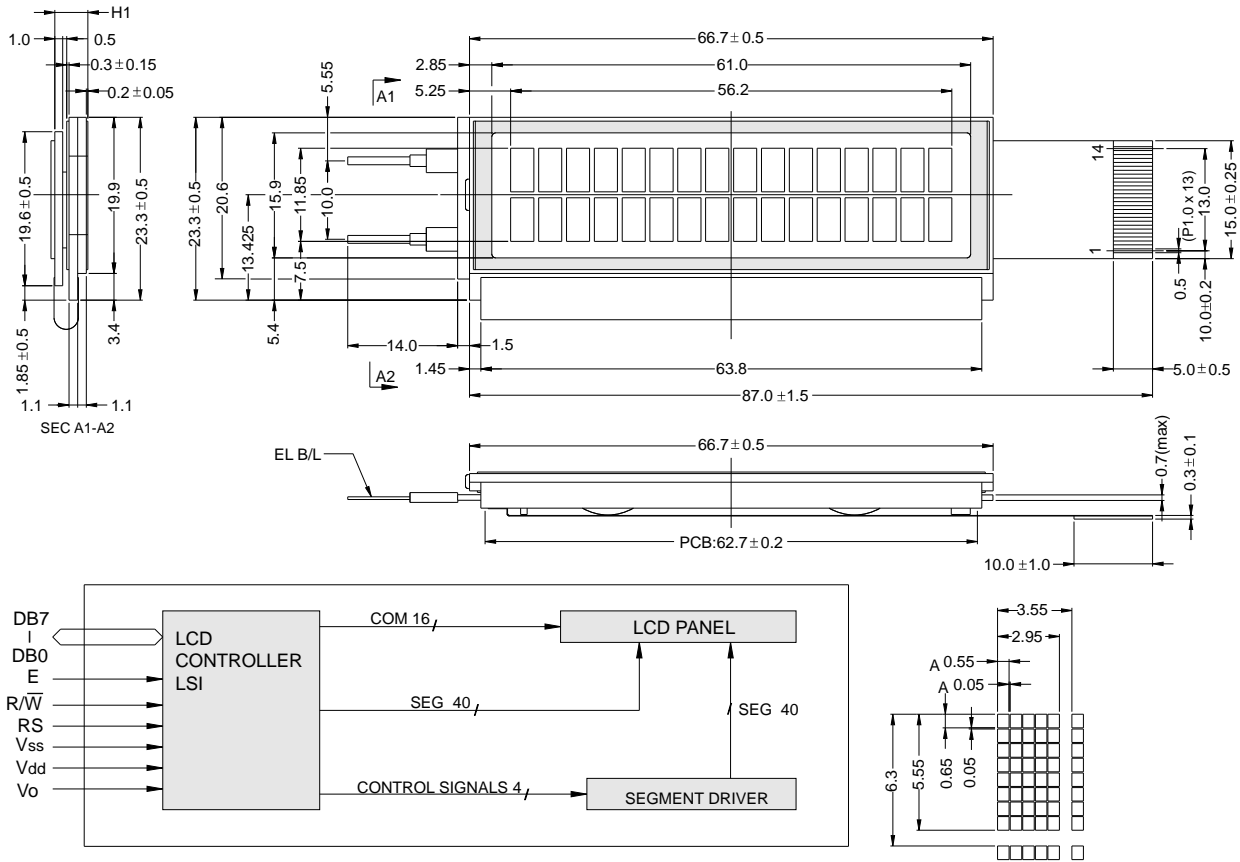

The tolerance unless classified $\pm 0.3\text{mm}$

MECHANICAL SPECIFICATION			
Overall Size	66.7 x 23.3	Module	H2 / H1
View Area	61.0 x 15.9	W/O B/L	- / 4.2
Dot Size	0.55 x 0.65	EL B/L	- / 4.6
Dot Pitch	0.60 x 0.70	LED B/L	-

PIN ASSIGNMENT		
Pin no.	Symbol	Function
1	Vdd	Power supply(Vdd>Vss)
2	Vo	Operating Voltage For LCD
3	RS	Register selection input
4	R/W	Data signal input for select
5	E	Data read / write
6	DB0	Data bus line
7	DB1	Data bus line
8	DB2	Data bus line
9	DB3	Data bus line
10	DB4	Data bus line
11	DB5	Data bus line
12	DB6	Data bus line
13	DB7	Data bus line
14	Vss	Power Supply (Vss=0)

ABSOLUTE MAXIMUM RATING								
Item	Symbol	Condition	Min.	Max.	Units			
Supply for logic voltage	Vdd-Vss	25°C	-0.3	7	V			
LCD driving supply voltage	Vdd-Vee	25°C	-0.3	13	V			
Input voltage	Vin	25°C	-0.3	Vdd+0.3	V			
ELECTRICAL CHARACTERISTICS								
Item	Symbol	Condition	Min.	Typical	Max.	Units		
Power supply voltage	Vdd-Vss	25°C	2.7	-	5.5	V		
LCD operation voltage	Vop	Top	N	W	N	W	V	
		-20°C	-	5	-	5.3	-	V
		0°C	4.4	-	4.7	-	5	V
		25°C	3.9	4.8	4.2	5.1	4.5	V
		50°C	3.7	-	4	-	4.3	-
		70°C	-	4.8	-	4.9	-	V
LCM current consumption (No B/L)	Idd	Vdd=5V	-	2	3	mA		
Backlight current consumption	LED/edge	VB/L=4.2V	-	-	-	mA		
	LED/array	VB/L=4.2V	-	-	-	mA		

REMARK

LCD option: STN, TN, FSTN

Backlight Option: LED,EL Backlight feature, other Specs not available on catalog is under request.

