
Silver Button GT-QFN Socket - Direct mount, solderless

□ 12.225 □ 14.725

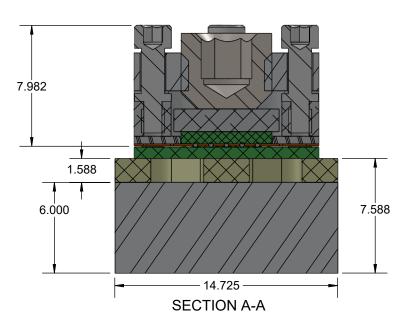

Description: GT-QFN 6x4mm QFN40F


www.ironwoodelectronics.com

Primary dimension units are millimeters, Secondary dimension units are [inches], Weight is in grams.

Tolerances: Hole diameters ±0.0254mm [±0.001"], Pitches (from true position) ±0.0762mm [±0.003"], substrate thickness tolerance ±10%, all other tolerances ±0.127mm [±0.005"] unless stated otherwise. Materials and specifications are subject to change without notice.

Features

- Directly mounts to target PCB (needs tooling holes) with hardware
 High speed, reliable Elastomer connection
 Minimum real estate required
 Compression plate distributes forces evenly
 Easily removable swivel socket lid

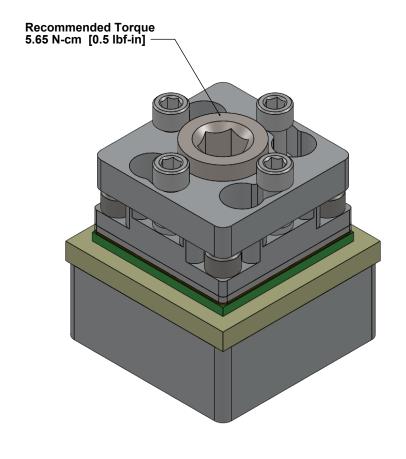


GT-QFN-3011 Drawing		
	Ironwood Electronics, Inc.	

TOP VIEW

Material: N/A Finish: N/A Weight: 7.53

STATUS: Released	SHEET: 1 OF 4	REV. A
ENG: J. Vavra	DRAWN BY: M. Raske	SCALE: 4:1
FILE: GT-QFN-3011 Dwa	DATE: 11/11/2015	

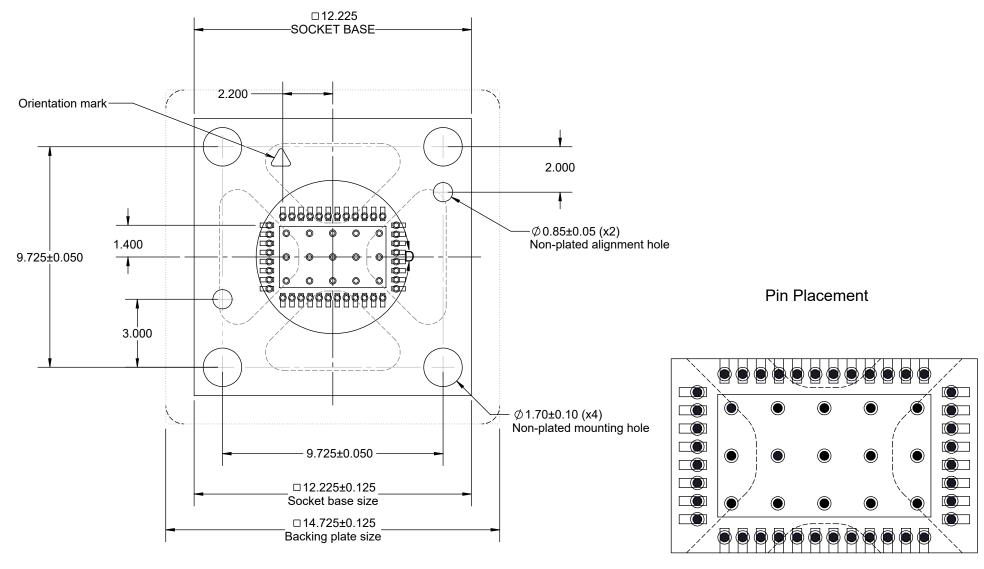

Do NOT locate vias in these locations

DETAIL D SCALE 12 : 1


Description: Recommended PCB Layout


Primary dimension units are millimeters, Secondary dimension units are [inches], Weight is in grams.

Tolerances: Hole diameters ±0.03mm [±0.001"], Pitches (from true position) ±0.025mm [±0.001"], substrate thickness tolerance ±10%, all other tolerances ±0.13mm [±0.005"] unless stated otherwise. Materials and specifications are subject to change without notice.

GT-QFN-3011 Drawing	Finish: N/A Weight: 7.53	STATUS: Released	SHEET: 2 OF 4	REV. A
Ironwood Electronics, Inc. Tele: (800) 404-0204 www.ironwoodelectronics.com		ENG: J. Vavra	DRAWN BY: M. Raske	SCALE: 6:1
		FILE: GT-QFN-3011 Dwg	DATE: 11/11/2015	

IRONWOOD PACKAGE CODE: QFN40F

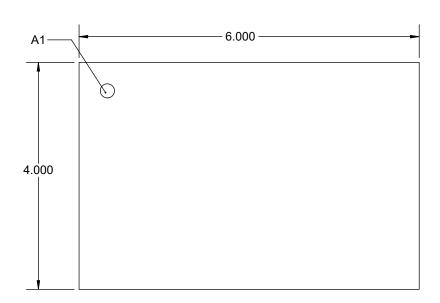

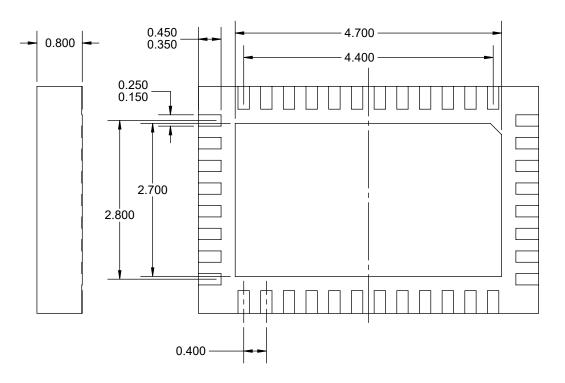

Dimensions are in millimeters.


- Interpret dimensions and tolerances per ASME Y14.5M-1994. Parallelism measurement shall exclude any effect of mark on top surface of package. 2.

Description: Compatible Device

Primary dimension units are millimeters, Secondary dimension units are [inches], Weight is in grams.

<u>Tolerances:</u> Hole diameters ±0.03mm [±0.001"], Pitches (from true position) ±0.025mm [±0.001"], substrate thickness tolerance ±10%, all other tolerances ±0.13mm [±0.005"] unless stated otherwise. Materials and specifications are subject to change without notice.

GT-QFN-3011 Drawing	Finish: N/A Weight: 7.53	STATUS: Released	SHEET: 3 OF 4	REV. A
Ironwood Electronics, Inc. Tele: (800) 404-0204 www.ironwoodelectronics.com		ENG: J. Vavra	DRAWN BY: M. Raske	SCALE: 15:1
		FILE: GT-QFN-3011 Dwg	DATE: 11/11/2015	

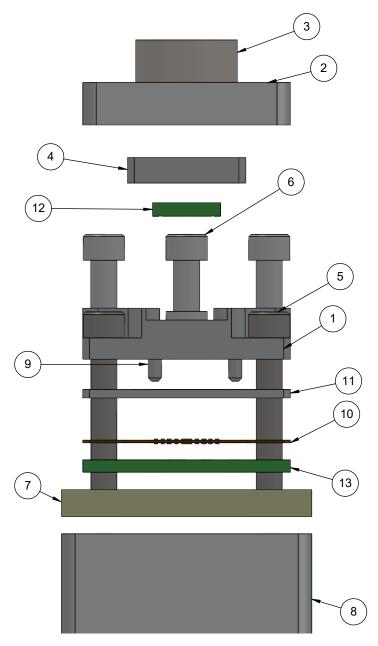

Description: Socket, Backing Plate Detail

Primary dimension units are millimeters, Secondary dimension units are [inches], Weight is in grams.


Tolerances: Hole diameters ±0.0254mm [±0.001"], Pitches (from true position) ±0.0762mm [±0.003"], substrate thickness tolerance ±10%, all other tolerances ±0.127mm [±0.005"] unless stated otherwise. Materials and specifications are subject to change without notice.

GT-QFN-3011 Drawing



©2015 Ironwood Electronics, Inc. Tele: (800) 404-0204 www.ironwoodelectronics.com Material: N/A Finish: N/A Weight: 7.53

ITEM NO.	DESCRIPTION	Material
1	Socket Base 7mm	7075-T6 (SN)
2	Socket Lid 7mm	7075-T6 Aluminum Alloy
3	Compression Screw M6x1	Stainless Steel (18-8)
4	Compression Plate 7mm IC, 1.5mm thick	7075-T6 (SN)
5	#0-80 X .375 LG, SOC HD CAP SCREW, ALLOY STL, BLK OXIDE	Alloy Steel
6	#0-80 Shoulder Screw, 1.59mm thread length	Stainless Steel (303)
7	Insulation Plate 7mm	FR4 Standard
8	Backing Plate	7075-T6 Aluminum Alloy
9	Alignment Pin 1/32" dia. x 1/8" Ing	Chrome Stainless Steel
10	GT elastomer for 6x4mm QFN40F	N/A
11	IC guide 6x4mm QFN40F	TECAPEEK CMF Ceramic filled
12	Test Chip 3.86x2.29mm QFN4C	FR4 High temp
13	Test PCB 3.86x2.29mm QFN4C	FR4 High temp

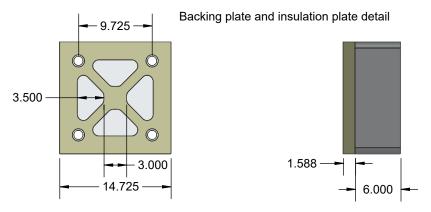

STATUS: Released	SHEET: 4 OF 4	REV. A
ENG: J. Vavra	DRAWN BY: M. Raske	SCALE: 4.5:1
FILE: GT-QFN-3011 Dwg	DATE: 11/11/2015	