



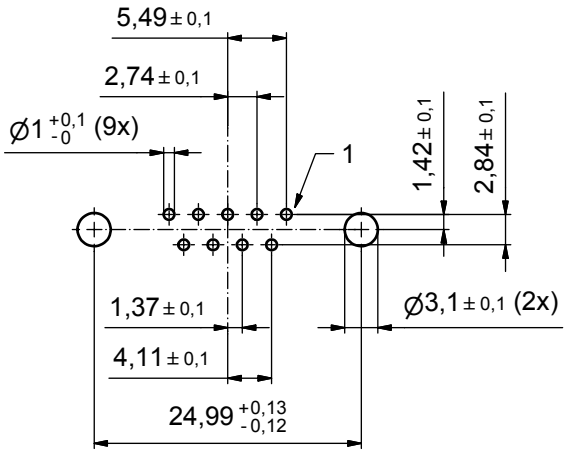


P.C.B. HOLE DRILLINGS

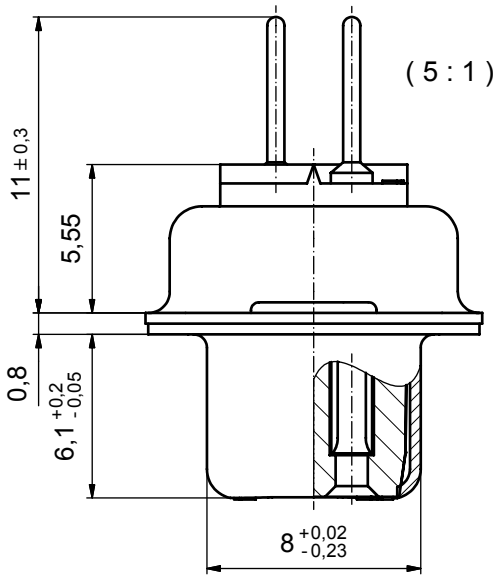

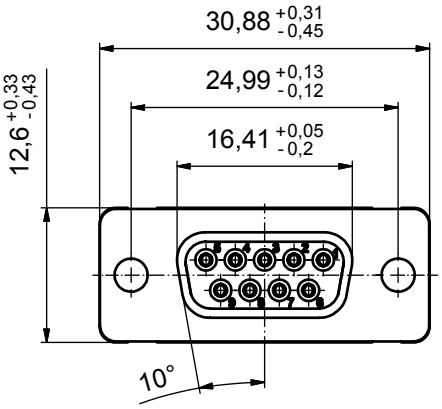

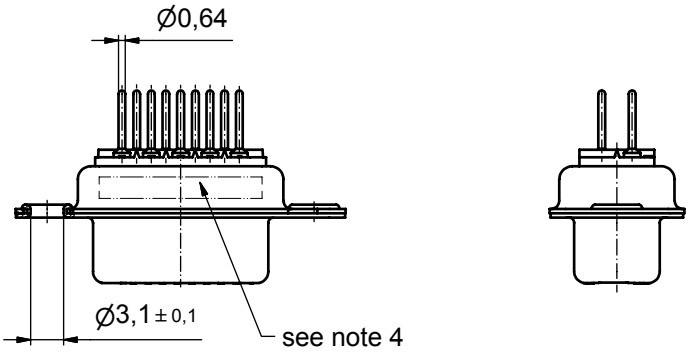



Directive 2002/95/EC „RoHS“ Compliant

NOTES:

1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
   PLATING: 8µin HARD GOLD over min. 50µin NICKEL
4. CONNECTOR IS PART MARKED: 164A10069X CONEC ABC

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

finish: see notes

tolerance ISO 2768-m

dim. in mm

	date	name
drawn	11.10.06	Lehmenkühler
appd.	11.10.06	Mickenbecker
norm		
d-old		

scale: 2:1 (5:1)

material: see notes

title:

D-SUB FEMALE
9pos. SOLDER PIN STRAIGHT

dwg no: 16K1A1911

Inventor 10

DIN-A3

sh: 1

part no: 164A10069X