Reducing adapter - REDUC-K-KV-M20/M16 BK - 1082732

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Reducing adapter, material: Polyamide fiberglass reinforced, connecting thread: M20 x 1.5, color: black, with flat gasket

Product Description

Reduced M20 to M16

RoHS

Key Commercial Data

Packing unit	1 pc
GTIN	4 055626 815763
GTIN	4055626815763
Custom tariff number	39269097
Country of origin	Germany

Technical data

Dimensions

Length	12 mm
Hexagon angular dimension	26.5 mm
Length of the connecting thread	6.5 mm

Ambient conditions

Degree of protection (IP)	IP65 (Depends on the screw connection used)
Ambient temperature (operation)	-30 °C ... 100 °C

General

Material	Polyamide fiberglass reinforced
Sealing material	NBR (Flat gasket)

Reducing adapter - REDUC-K-KV-M20/M16 BK - 1082732

Technical data

General

Flammability rating according to UL 94	HB
Thread type on connection side	M20 x 1.5
Torque	2.5 Nm ... 3 Nm
Color	black
Assembly instructions	With corresponding screw connection: IP65

Standards and Regulations


Halogen-free	no

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

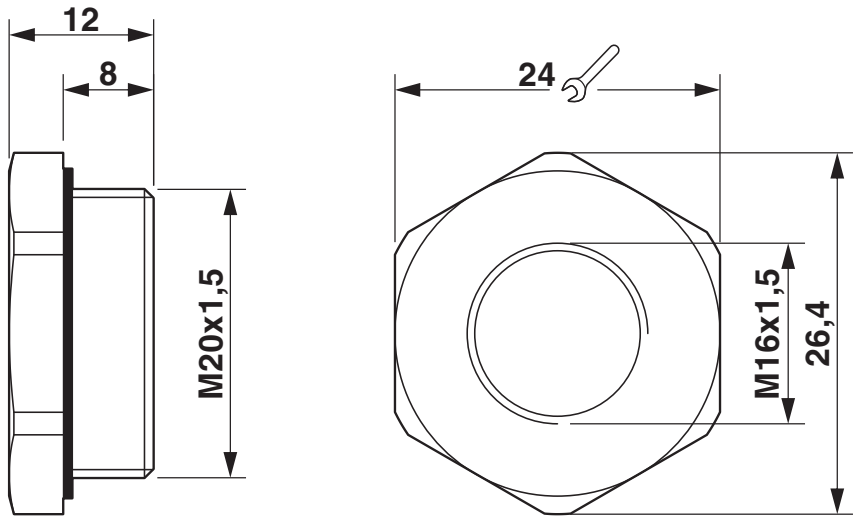

Dimensional drawing

Classifications

eCl@ss

eCl@ss 10.0.1	27440201
eCl@ss 11.0	27144492
eCl@ss 6.0	27261200

Reducing adapter - REDUC-K-KV-M20/M16 BK - 1082732

Classifications

eCl@ss

eCl@ss 7.0	27440201
eCl@ss 9.0	27440201

ETIM

ETIM 6.0	EC002309
ETIM 7.0	EC000938

UNSPSC

UNSPSC 18.0	31261501
UNSPSC 19.0	31261501
UNSPSC 20.0	31261501
UNSPSC 21.0	31261501

Phoenix Contact 2022 © - all rights reserved
http://www.phoenixcontact.com