


**MATERIAL:**  
Housing Material: PA9T UL94V-0, Black  
Contact Terminal: PHOSPHOR BRONZE (t=0.25mm).  
Metallic Shell: SUS(t=0.30mm).  
**FINISH:**  
CONTACT: UNDER PLATED 50u" MIN. NICKEL ALL OVER 100u" MIN. TIN IN SOLDERING AREA GOLD PLATED IN CONTACT AREA.  
SHIELD: N:PLATED WITH 40u" THICKNESS NICKEL OVER 50u" MIN. THICKNESS Cu.

**RECOMMENDED P.C.B LAYOUT (THICKNESS=1.2mm)**  
(COMPONENT SIDE) P.C.B. TOLERANCE:±0.05

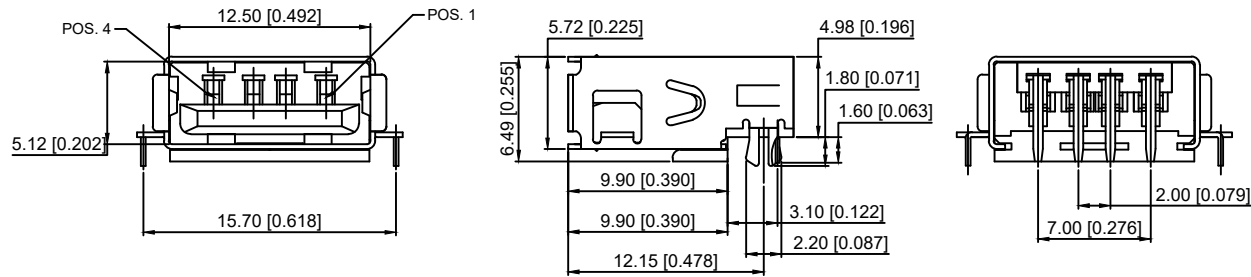

**U221-04XN-3BU04-SS**

- 1:Au 1U"
- 5:Au 15U"
- 6:Au 30U"
- S:SUS
- S:Scrolls F:Flat
- W:WHITE B:BLACK
- 1:PBT
- 2:PA6T
- 3:PA9T
- 4:LCP

					ANGLAR	±5°	DSND		DATE		SCALE: N/A	MODEL TYPE: USB 2.0				
ΔX					L ≤ 4	±0.2	DWN		DATE		VIEW:	PART NO.: U221-04XN-3BU04-SS				
Δx					4 < L ≤ 16	±0.3	CHKD		DATE		UNIT: mm/in	DWG NO.: U221-04XN-3BU04-SS				
Δx					16 < L ≤ 63	±0.4	APPD		DATE		SIZE: A4					
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5						WEIGHT	SHEET	REVISION		
					UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO., LIMITED					1.0g	1/1	A0		
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn																