



Product Features

- 2400 ~ 2500MHz (ISM band)
- 100W CW Peak Power @ 50V
- 60% Drain Efficiency @ 50V
- Excellent Ruggedness
- Excellent Thermal Stability

Applications

- Industrial Heating and Drying
- Scientific
- Medical
- Plasma Lighting



Description

The RNP24100-20 is designed for Industrial, Scientific, Medical (ISM) and Plasma Lighting applications at 2450MHz. This Amplifier is suitable for use in CW, pulse and linear applications. This high efficiency rugged device is targeted to replace Industrial magnetrons and other vacuum tubes currently powering industrial heating, drying, plasma lighting and medical systems.

Electrical Specifications @ $V_{GS} = -3.5V$, $V_{DS} = 50V$, $T = 25^{\circ}C$, 50Ω System

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Operating Frequency	MHz	2400	-	2500	fo
Operating Bandwidth	MHz	-	100	-	OBW
CW Output Power	dBm	50	-	-	Po
Power Gain	dB	50	-	-	Gp
Gain Flatness	dB	-	-	±0.5	Gf
Input Return Loss	dB	-	-	-10	S11
Operating Voltage	V	V _{DC1} : 5.6±1%			-
		V _{DC2} : 50 ±1%			
Current Consumption	5.6V	-	0.4	0.5	IDD
	50V		-	-	
Efficiency @ 50dBm	%	60	-	-	Eff

* Custom design available

Environmental Characteristics

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Operating Case Temperature	°C	0	-	60	Ta
Storage Temperature	°C	-40	-	100	Tstg
Relative humidity w/o condensation	%	-	-	95	RH

Mechanical Specifications


PARAMETER	UNIT	VALUE
Dimensions (L x W x H)	mm	160 x 65 x 32
Weight	Kg	1.4
RF Input Connector	-	SMA (Female)
RF Output Connector	-	N-type (Female)
I/O Connector	-	7W2 Combo Connector
Cooling	-	External Heat-sink & Airflow




Typical CW Performance Charts

* Bias condition (VGS=-3.5V, VDS=50V, Tc=25°C)


Peak Power, Drain Efficiency vs. Frequency

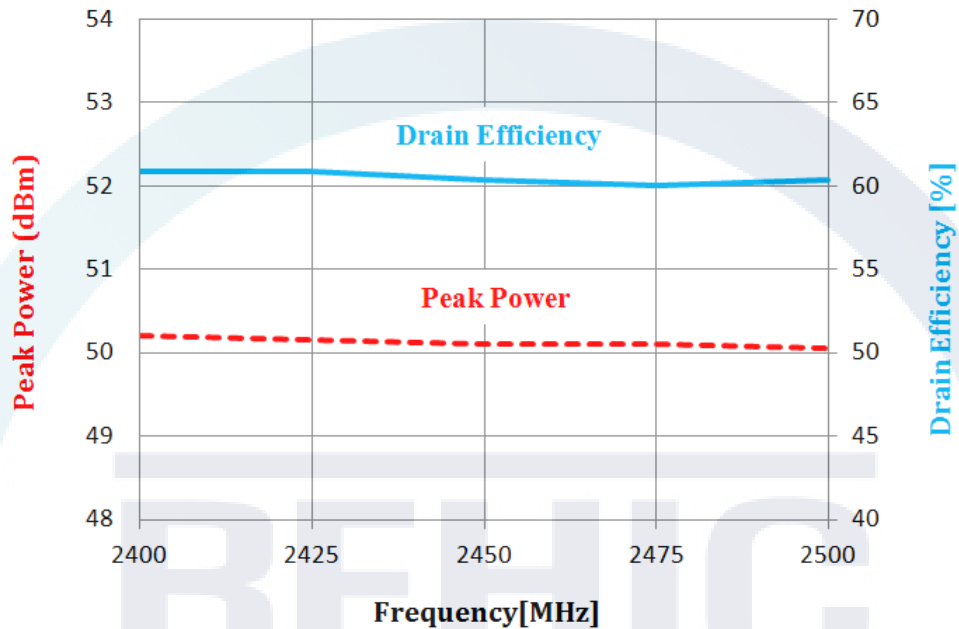

Power Gain, Drain Efficiency vs. Frequency

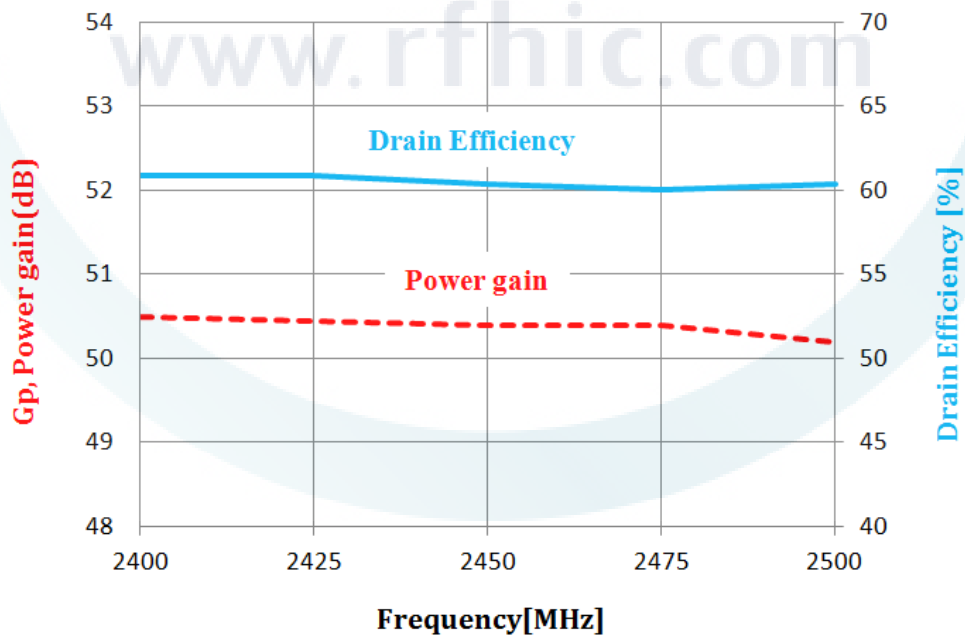


Block Diagram

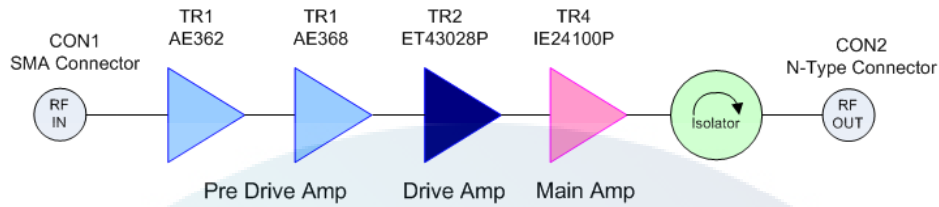

Outline Drawing

* Unit: mm | Tolerance: ±0.2

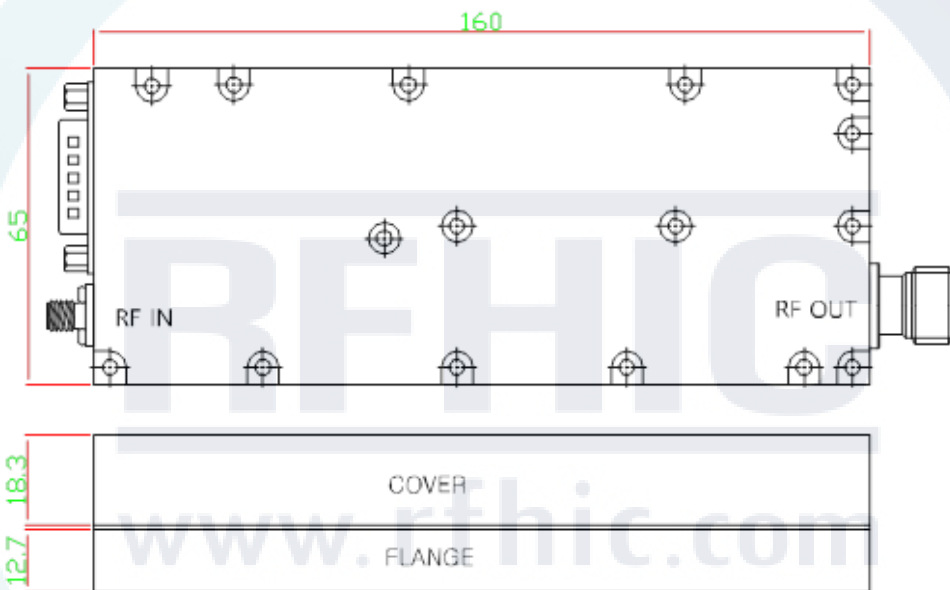


Note

Connector positions and module mount holes may be subjected change.

Interface Connector

Pin-Control (7W2 Combo Connector)

Pin No	Description
A1	Vdd (+50V)
A2	Ground
1	+5.6V
2	Forward power detecting
3	Reverse power detecting
4	Temperature monitor
5	Ground



Revision History

Part Number	Release Date	Version	Description	Data Sheet Status
RNP24100-20	June, 2017	1.0	Initial release of datasheet	Preliminary



RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use.

Sales, inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US Sales Team at 919-677-8780. For all other inquiries, please contact the International Sales Team at 82-31-8069-3036.