

MATERIAL AND FINISH:

Insulator: Polycarbonate, UL-94V-0 rated
Contacts: Brass

ELECTRICAL SPECIFICATIONS:

Current rating: 10 A/15 A
Voltage rating: 250 VAC
Insulation resistance: 100 Mohm min. at 500 VDC
Dielectric withstanding voltage: 2000 VAC for one minute

ORDERING CODE:

43R03-3
1 2 3 4

1) COLOR

- 1 = BLACK
2 = GRAY

2) TERMINAL OPTIONS

- 1 = .187(4.8) WITH Ø1.4
2 = .250(6.3) WITH Ø1.65

3) ELECTRICAL CIRCUIT CONFIGURATION



1 = 10A 250V 70°C

15A 250V 70°C
2+GROUND



2 = 10A 250V 120°C

15A 250V 120°C
2+GROUND

4) PANEL THICKNESS

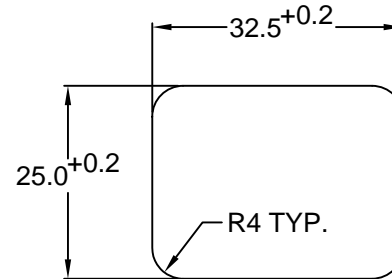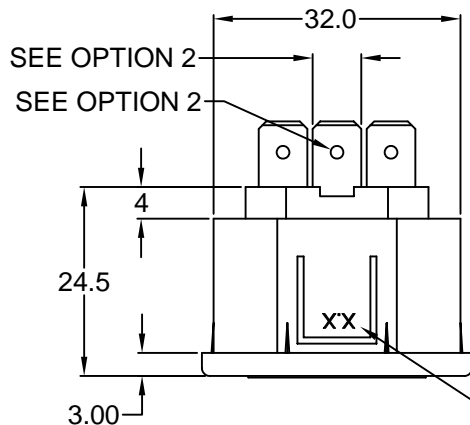

RECOMMENDED PANEL CUTOUT

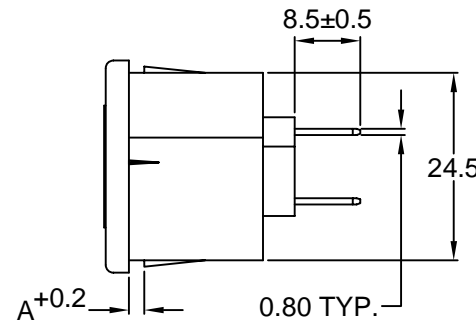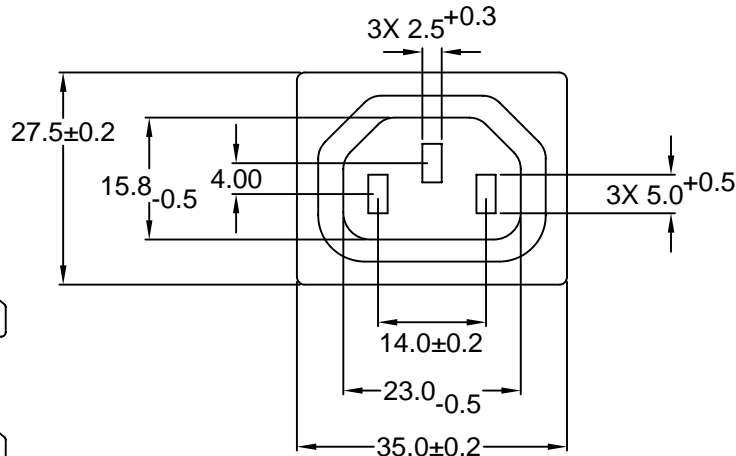

P/N	A	MAX. PANEL THICKNESS
43R03-3XXX-150	1.5	1.5
43R03-3XXX-200	2.0	2.0
43R03-3XXX-250	2.5	2.5

ADDITIONAL PANEL THICKNESS AVAILABLE ON REQUEST

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 10A/15A IEC 60320 APPL. OUTLET; QC
TERMINALS; SNAP-IN, PANEL MOUNT

43R03-3XXX-XXX

SHEET 1 of 1

TOLERANCE UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY GQ DATE: 10/05/01
CHECK BY TD DATE: 10/09/01
APPR BY PB DATE: 10/09/01

RoHS COMPLIANT

SCALE: NTS ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS

REV: A

REV	DATE	CHANGE	CHNG CHECK	APPR
A	10/8/04	ORDERING CODE #	PB	

D

C

B

A