




FCS-5064 2MP 2MP: 1

Fixed Network Camera, 5-Megapixel, Outdoor, PoE 802.3af, Day & Night, IR LEDs, WDR

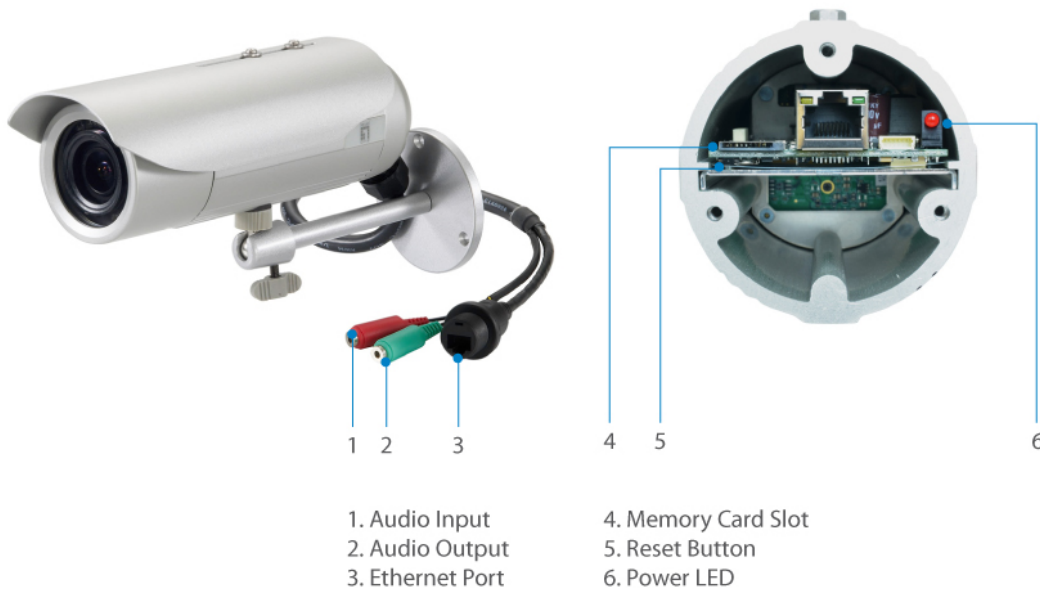

1. Audio Input
2. Audio Output
3. Ethernet Port

4. Memory Card Slot
5. Reset Button
6. Power LED

Key Features

- 2MP 2MP Micro SDHC/SDXC 2MP 2MP
- 5-Megapixel (2592 x 1944) 2MP 2MP
- 2MP 2MP 2MP (-40°C to 50°C) 2MP 2MP 2MP IP66-2MP
- 2MP 2MP 2MP 2MP WDR (2MP 2MP 2MP) 2MP
- Vandal-proof IK10-rated housing
- 2MP 30 m 2MP 2MP 2MP 2MP LED
- 2MP: H.264/MJPEG
- 2MP 2MP 2MP 2MP IR-2MP 2MP
- Power support: PoE (IEEE 802.3af)
- 2MP 64-2MP 2MP 2MP (OneSecure App 2MP)



System Specifications

Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet

IEEE 802.3u 100-BASE-TX, Fast Ethernet

IEEE 802.3af Power over Ethernet (PoE)

TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, IPv6, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP, UPnP, SNMP, Bonjour

Image Sensor:

5-Megapixel 1/3.2" Progressive Scan CMOS

Connectors and Cabling:

1 x RJ-45 10/100 Mbps PoE Port

1 x 3.5mm line out

1 x 3.5mm line in

I/O terminal block (1 DI/1 DO)

Modularity:

1 x MicroSDHC/ MicroSDXC card slot

Button:

Reset Button

Indicator:

Power

Lens:

Vari-focal, Fixed iris, Manual focus, f2.8-12mm, F1.4

IR Cut Filter:

Removable infrared-cut filter for day & night function

IR LED:

15 IR LEDs for illumination up to 30m

Shutter Time:

1/5 ~ 1/10,000 sec

Angle of View:

69.2° ~ 28.2°

Pan/Tilt/Zoom:

Digital Zoom to very high detail available on Software

Video Compression:

H.264 / MJPEG

Resolution:

5M (2592x1944)

Video Format:

RAW

Audio Compression:

G.711

Power:

Power Consumption: PoE Class 2 (IEEE802.3af) / 5.76 W (IR on)

Power Input: 802.3af PoE

Features

Video:

Image Setting: - Adjustable image size, quality and bit rate

- Configurable brightness, sharpness, contrast, saturation, white balance and exposure

- AGC/AWB/AES

- Back Light Compensation (BLC)

- Wide Dynamic Range (WDR), Basic WDR (74 dB)

- 2D Noise Reduction (2DNR)

Streaming: Up to 2 video streams

Performance

Data Transfer Rate:

10/100Mbps

Storage Capacity:

SD/MicroSD memory card of up to 64GB

Frame Rate:

15 fps at 2592 x 1944; 15 fps at 2048 x 1536; 30 fps at 1920 x 1080; 30 fps at 1280 x 720; 30 fps at 640 x 480 ; 15 fps 320 x 240 ; 15 fps at 320 x 240

Minimum illumination:

Color: 0.1 lux at F1.4

B/W: 0 lux (IR LED on)

Environment

Temperature (°C):

Operating: -40°C ~ 50°C

Humidity (Non-condensing):

Operating: 10% ~ 85%

Physical Specifications

Dimensions (W x D x H mm):

77 x 193 x 73 mm

Weight (g):

955 g

Enclosure:

Weather proof IP68-rated housing

Vandal proof IK10-rated

Others

Approval and Compliance:


CE, FCC, ONVIF, IP68, IK10, NEMA 4X

Deployment:

Wall Mount

Operation Systems:

Microsoft Windows 8/7/Vista/XP

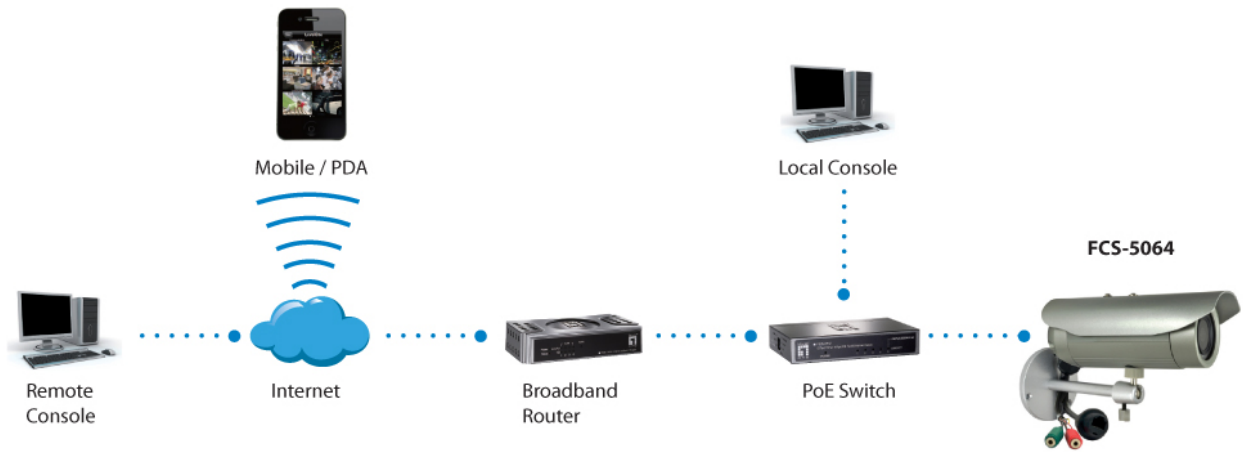

Order Information

FCS-5064

Package Contents

FCS-5064
 Bracket
 Mounting Kit
 Screw Kit
 Quick Installation Guide
 Resource CD (User Manual, Utility, QIG)



CAS-2402
 Corner mount



CAS-2503
 Pole Mount for PTZ, hemispheric and dome cameras



CAS-3103
 Wall Mount Bracket

No liability or responsibility for any errors or omissions in the content.
 Specifications are subject to change without notice.
 All mentioned brand names are registered trademarks and property of their owners.
 Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.