
LEDtrack Row Lighting System
LEDtrack Reel

LEDtrack REEL/ 7 525 215 450 3P A75 B150 C75

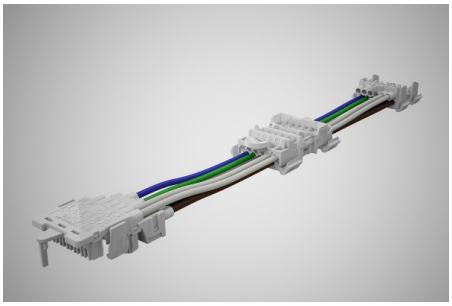

7 pole, Current Rating: 16 A, Voltage Rating: 400 V, Core Cross-Section min.: 1.5 mm², Core Cross-Section max.: 2.5 mm²

Order Info

Reference Number (ref. no.)	159044
Applications	Lighting
PU	10
EAN	4028012135547

Type

Number of poles	7 pole
PE Function	yes
Protection Against Incorrect Plugging	yes

Technical Data

Voltage Rating	400 V
Current Rating	16 A
Core Cross-Section min.	1.5 mm²
Core Cross-Section max.	2.5 mm²
Impulse Voltage Rating	2.5 kV
Flammability Rating	V-2
max. Ambient Temperature Operation	70 °C
IP Code	IP20
Type of Conductor Solid	yes
Cable Type	H07V2-U
Length	4.50 m

Accessories

LEDtrack ABK	159901