

T H E R M O M E T R I C S  
A C O M M I T M E N T T O E X C E L L E N C E

# NTC Type MS

## Thermometrics Epoxy-Coated Thermistor



### Description

Epoxy-coated point-matched disc thermistors with 0.01 in (0.254 mm) nickel PTFE insulated lead-wires.

### Features


- Low cost, solid state temperature sensor
- High sensitivity to changes in temperature
- Suitable for temperature measurement, control and compensation
- Standard resistance tolerances down to  $\pm 2\%$
- Excellent mechanical strength
- Wide operating temperature range:  $-58^{\circ}\text{F}$  to  $300^{\circ}\text{F}$  ( $-50^{\circ}\text{C}$  to  $150^{\circ}\text{C}$ )
- Suitable for PCB and probe mountings
- Available in a wide range of material systems
- Overall lengths from 0.71 in to 3.07 in (18 mm to 78 mm)

**Amphenol**  
**Advanced Sensors**

# Type MS Specifications

Epoxy-coated thermistor

Type Number	Ro@ 77 °F (25 °C) (Ω)	Material System	A in	mm
RL0703-624-73-MS	1K	D7.3	0.120	3.05
RL0503-1248-73-MS	2K	D7.3	0.095	2.41
RL0703-1445-95-MS	2.5K	D9.5	0.120	3.05
RL0503-2890-95-MS	5K	D9.5	0.095	2.41
RL0703-2910-97-MS	5K	D9.7A	0.120	3.05
RL0703-3720-84-MS	6K	D8.4	0.120	3.05
RL0503-5820-97-MS	10K	D9.7A	0.095	2.41
RL0703-5744-103-MS	10K	D10.3	0.120	3.05
RL0503-7440-84-MS	12K	D8.4	0.095	2.41
RL0703-8780-96-MS	15K	F9.61	0.120	3.05
RL0503-11.49K-103-MS	20K	D10.3	0.095	2.41
RL0703-13.77K-120-MS	25K	D12.0	0.120	3.05
RL0503-17.56K-96-MS	30K	F9.61	0.095	2.41
RL0503-27.53K-120-MS	50K	D12.0	0.095	2.41
RL0703-27.68K-122-MS	50K	D12.2	0.120	3.05
RL0503-55.36K-122-MS	100K	D12.2	0.095	2.41

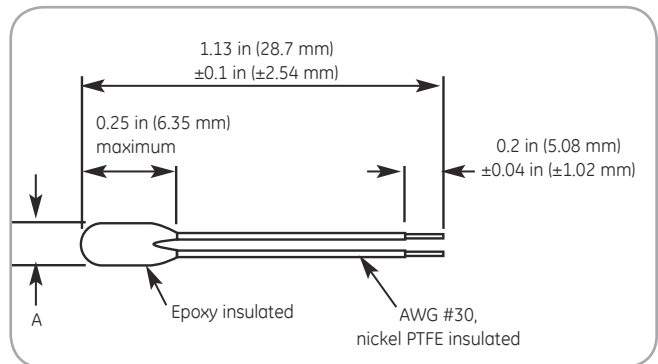

NTC Type MS Dimensions

## Options

- Other resistances in the range 2 kΩ to 100 kΩ
- Other tolerances, tolerances at other temperatures
- Alternative lead lengths, lead materials, insulations
- For ±5% @ 77°F (25°C), replace “MS” with “MS5”
- For ±3% @ 77°F (25°C), replace “MS” with “MS3”
- For ±2% @ 77°F (25°C), replace “MS” with “MS2”

## Data

- Temperature accuracy: ±1°C @ 77°F (25°C)
- Dissipation constant: 1.4 mW/°C
- Time constant: 15 seconds
- Operating range: -58°F to 302°F (-50°C to 150°C)

**Amphenol**  
Advanced Sensors

[www.amphenol-sensors.com](http://www.amphenol-sensors.com)

© 2014 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice. Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.

AAS-920-574A-03/2014