




SHEET 1 OF 1

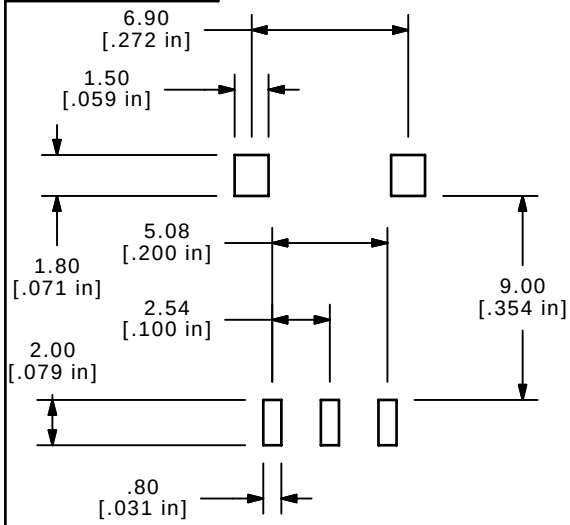



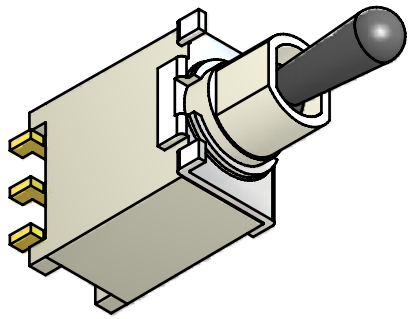

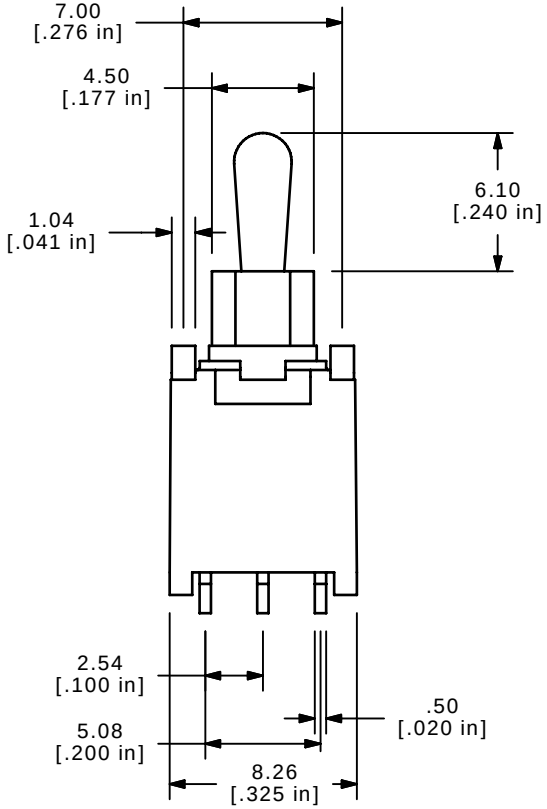

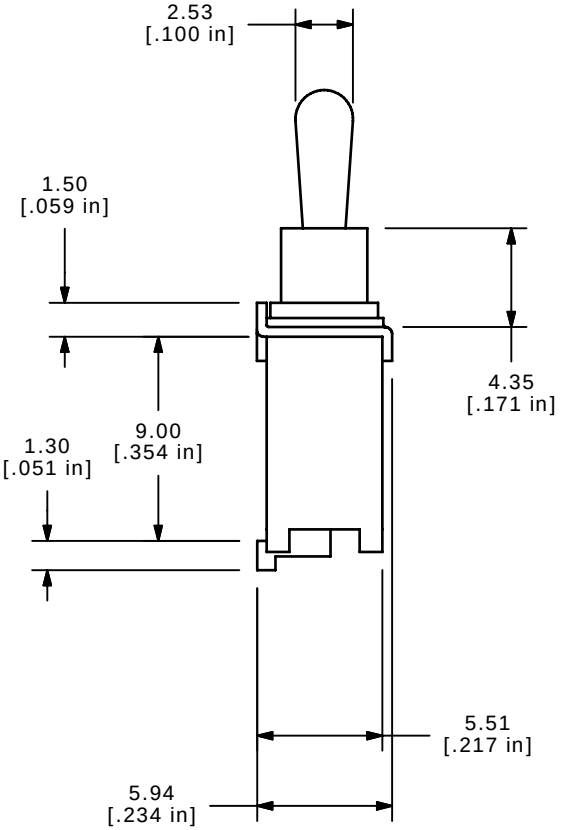

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	(ON)
2-3	OPEN	2-1

(ON) = MOMENTARY

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. TERMINAL NUMBERS FOR REF. ONLY
3. GENERAL TOLERANCE: X.X=± 0.4
   X.XX=± 0.25
▲4. PLATING MATERIAL: GOLD
5. RATING: 0.4VA MAX. @ 20VAC OR DC
6. MECHANICAL LIFE: 50,0000 MAKE AND BREAK CYCLES AT FULL LOAD
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS@SEA LEVEL
9. OPERATING TEMPERATURE: -30˚C TO 85˚C
10. ▲DENOTES CRITICAL PARAMETER
11. 2002/95/EC (ROHS) COMPLIANT.

REV	PCR NO	DESCRIPTION	DATE	BY
A	18540	NEW RELEASE	5/26/09	rc

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE 200BWMSP5TBA1SM8RE

SCALE	DATE	DR	DWG	REV
3:1	5/7/2009	RC	T833047	A