



SUPER FAST RECOVERY RECTIFIER

SF61 THRU SF65

VOLTAGE RANGE
CURRENT


50 to 400 Volts
6.0Ampere

FEATURES

- Low coat construction
- Fast switching for high efficiency.
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
260°C/10 secods/.375"(9.5mm)lead length at 5 lbs(2.3kg) tension

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-O rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.042ounce, 1.19grams

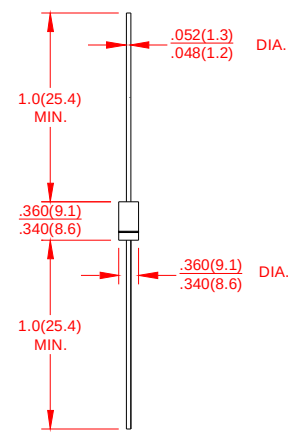

R-6

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	SF 61	SF 62	SF 63	SF 64	SF 65	UNITS
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	150	200	300	Volts
Maximum RMS Voltage	V _{RMS}	35	70	105	140	210	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	150	200	300	Volts
Maximum Average Forward Rectified Current 0.375”(9.5mm) lead length at T _A = 55℃	I _(AV)	6.0					Amp
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	I _{FSM}	150					Amps
Maximum Instantaneous Forward Voltage @ 6.0A	V _F	0.95			1.25		Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	T _A = 25℃	I _R	5.0				μA
	T _A = 125℃		50				
Maximum Reverse Recovery Time Test conditions IF=0.5A,IR=1.0A,IRR=0.25A	trr	35					ns
Typical Thermal Capavitance (Measured at 1.0MHz and applied rever voltage of 4.0V)	C _J	60		40			PF
Typical Thermal Resistance(NOTE 1)	R _{θJA}	30					℃/W
Operating Junction Temperature Range	T _J	(-55 to +150)					℃
Storage Temperature Range	T _{STG}	(-55 to +150)					℃

Notes:

1. Thermal resistance from junction to ambient with .375"(9.5mm)lead length, PCB. mounted. .



SUPER FAST RECOVERY RECTIFIER

SF61 THRU SF65

VOLTAGE RANGE
CURRENT

50 to 400 Volts
6.0Ampere

RATING AND CHARACTERISTIC CURVES SF61 THRU SF65

FIG.1-TYPICAL FORWARD CURRENT
DERATING CURVE

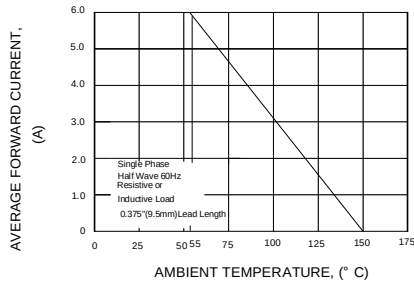


FIG.2-MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT

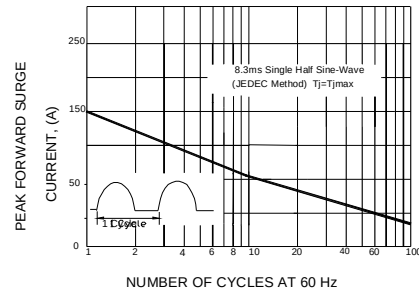


FIG.3-TYPICAL INSTANTANEOUS
FORWARD CHARACTERISTICS

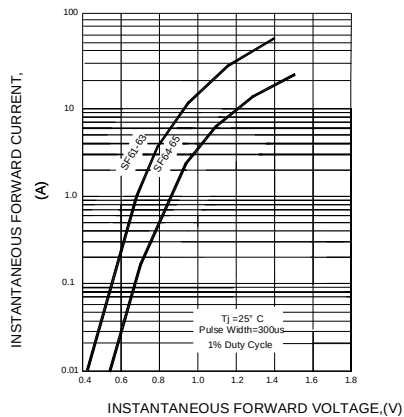


FIG.4-TYPICAL REVERSE
CHARACTERISTICS

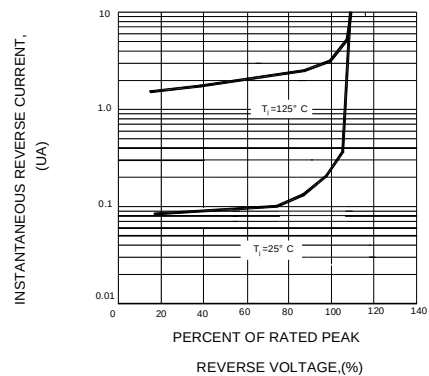


FIG.5-TYPICAL JUNCTION CAPACITANCE

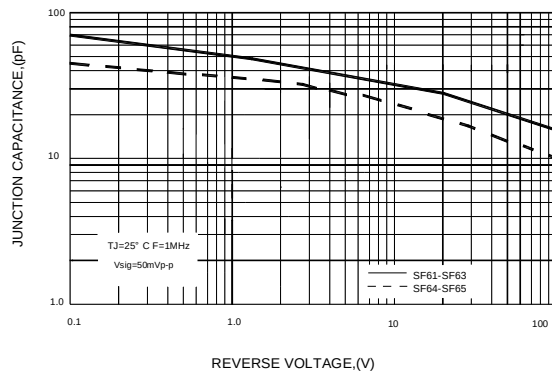


FIG.6-TEST CIRCUIT DIAGRAM AND
REVERSE RECOVERY TIME CHARACTERISTIC

