
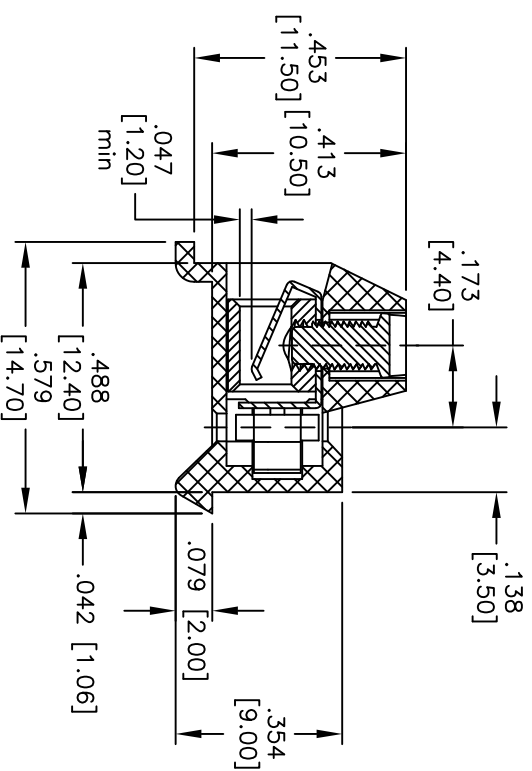
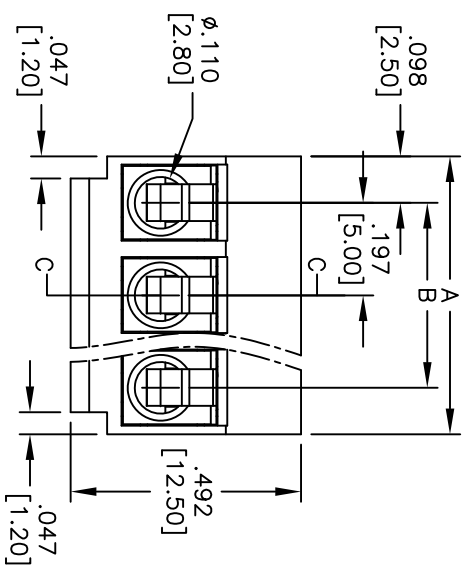


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/05/10	
A		REVISED SPEC.	1/18/11	

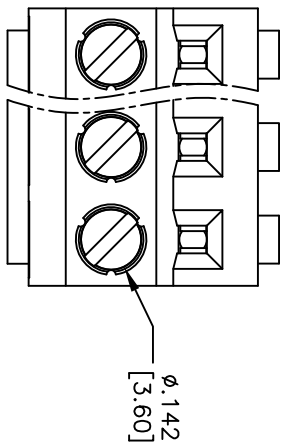

SECTION C-C

Poles: 2 thru 24
 A = .197 [5.00] X No. of Positions
 B = .197 [5.00] X No. of Spaces

SPECIFICATIONS:
 Material: Thermoplastic, rated UL 94V-0
 Insulator color: Green
 Wire Cage: Phosphor Bronze, Tin plated.
 Screw: Steel, M2.6/Zinc plated.
 Contact: Brass, Tin plated.
 Electrical:
 Operation voltage: 300 VAC max
 Current rating: 10 Amps max per Pole
 Dielectric withstanding voltage: 1600 VAC for 1 minute
 Mechanical:
 Torque(Lb-in): 3.5
 Wire Range: 14-26 Awg.
 Environmental:
 Operating temperature: -40°C to +115°C
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: TERMINAL BLOCK, .197" [5.00] PITCH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES	
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	DRY
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	EB114-XX-C	A
REF: S00007T	SCALE: NTS	SHEET 1 OF 1