CMPTA42 NPN
CMPTA92 PNP

SURFACE MOUNT
COMPLEMENTARY
HIGH VOLTAGE
SILICON TRANSISTORS



SOT-23 CASE

Central Semiconductor Corp.

www.centralsemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMPTA42 and CMPTA92 are complementary surface mount epoxy molded silicon planar epitaxial transistors designed for high voltage applications.

MARKING CODES: CMPTA42: C1D
CMPTA92: C2D

MAXIMUM RATINGS: (T_A=25°C)	**SYMBOL**	**CMPTA42**	**CMPTA92**	**UNITS**
Collector-Base Voltage	V_{CBO}	300	300	V
Collector-Emitter Voltage	V_{CEO}	300	300	V
Emitter-Base Voltage	V_{EBO}	6.0	5.0	V
Continuous Collector Current	I_C	500		mA
Power Dissipation	P_D	350		mW
Operating and Storage Junction Temperature	T_J, T_{stg}	-65 to +150		°C
Thermal Resistance	Θ_{JA}	357		°C/W


ELECTRICAL CHARACTERISTICS: (T_A=25°C unless otherwise noted)

		CMPTA42		**CMPTA92**		
SYMBOL	**TEST CONDITIONS**	**MIN**	**MAX**	**MIN**	**MAX**	**UNITS**
I_{CBO}	V_{CB}=200V	-	100	-	250	nA
I_{EBO}	V_{BE}=6.0V	-	100	-	-	nA
I_{EBO}	V_{BE}=3.0V	-	-	-	100	nA
BV_{CBO}	I_C=100μA	300	-	300	-	V
BV_{CEO}	I_C=1.0mA	300	-	300	-	V
BV_{EBO}	I_E=100μA	6.0	-	5.0	-	V
$V_{CE(SAT)}$	I_C=20mA, I_B=2.0mA	-	0.5	-	0.5	V
$V_{BE(SAT)}$	I_C=20mA, I_B=2.0mA	-	0.9	-	0.9	V
h_{FE}	V_{CE}=10V, I_C=1.0mA	25	-	25	-	
h_{FE}	V_{CE}=10V, I_C=10mA	40	-	40	-	
h_{FE}	V_{CE}=10V, I_C=30mA	40	-	25	-	
f_T	V_{CE}=20V, I_C=10mA, f=100MHz	50	-	50	-	MHz
C_{ob}	V_{CB}=20V, I_E=0, f=1.0MHz	-	6.0	-	6.0	pF

CMPTA42 NPN
CMPTA92 PNP

SURFACE MOUNT
COMPLEMENTARY
HIGH VOLTAGE
SILICON TRANSISTORS

SOT-23 CASE - MECHANICAL OUTLINE

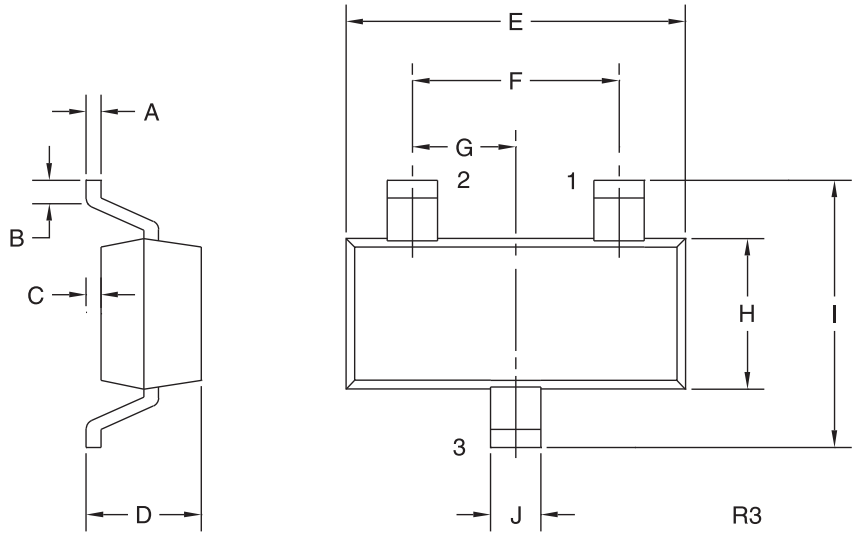

LEAD CODE:
1) Base
2) Emitter
3) Collector

MARKING CODES:
CMPTA42: C1D
CMPTA92: C2D

DIMENSIONS				
	INCHES		MILLIMETERS	
SYMBOL	MIN	MAX	MIN	MAX
A	0.003	0.007	0.08	0.18
B	0.006	-	0.15	-
C	-	0.005	-	0.13
D	0.035	0.043	0.89	1.09
E	0.110	0.120	2.80	3.05
F	0.075		1.90	
G	0.037		0.95	
H	0.047	0.055	1.19	1.40
I	0.083	0.098	2.10	2.49
J	0.014	0.020	0.35	0.50

SOT-23 (REV: R3)