

Features

- Large capacitance series.
- Two lead style (bare wire or Insulated lead).





Safety Agency : Standard	File No.
VDE : EN60252, VDE0560 Teil 8	126777

Applications


- Suppressing noise occurring in electric appliances and motors in Germany.

Circuit

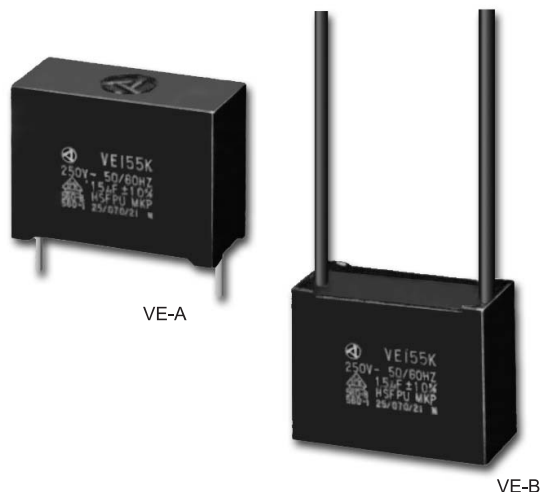


Dimensions

- VE-A

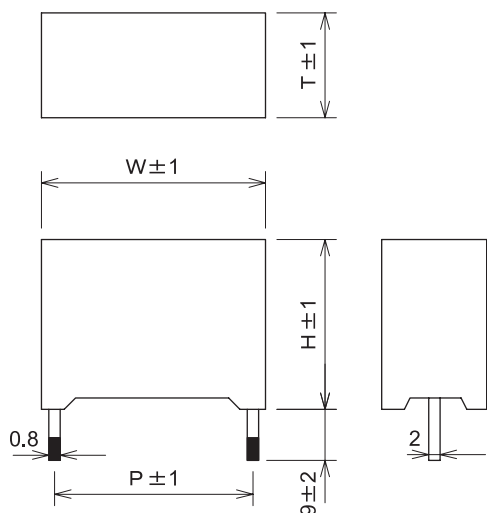

Unit: mm

- VE-B

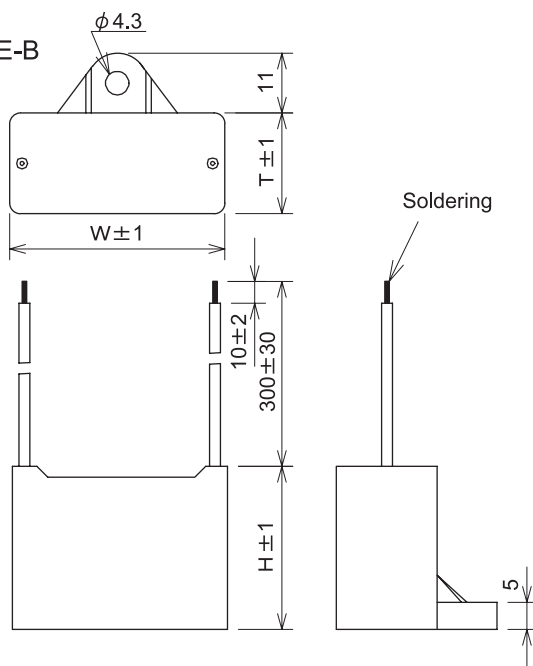

Electrical Specifications

Rated Voltage **250VAC**

Safety Agency	Model Number	Capacitance μF±10%	Dimensions				Dissipation Factor	Test Voltage	Insulation Resistance
			W	H	T	P			
	VE155-A/B	1.5	39,5	30,0	18,5	35,0	0.001max. (at 1kHz)	Line to Line 1075Vdc 60sec Line to Ground 2000Vrms 50/60Hz 60sec	Line to Line 5000 Ω · Fmin Line to Ground 30000M Ω min (at 500Vdc)
	VE225-A/B	2.2	39,5	30,0	18,5	35,0			
	VE335-A/B	3.3	49,5	33,0	20,5	45,0	0.002max. (at 1kHz)		
	VE475-A/B	4.7	59,5	35,5	21,5	55,0			
	VE685-A/B	6.8	59,5	43,5/42,5	30,5	55,0			
	VE106-A/B	10.0	59,5	43,5/42,5	30,5	55,0			

Operating Temperature: -40~+85°C