SPECIFICATION FOR APPROVAL

TO: _____

PART NO.		REV.		DELTA SAMPLE ISSUE NO	
PART NAME	EMI FILTER			DELTA MODEL	03SB3SM
ORDER P/N.	03SB3SM			SAMPLE ISSUE DATE	

1. ELECTRICAL CHARACTERISTICS:

1-1. VOLTAGE RATING 115/250VAC

1-2. CURRENT RATING

3. AT 115VAC ..... 3 A RMS Max.
B. AT 250VAC ..... 3 A RMS Max.

1-3. OPERATING FREQUENCY..... 50/60 Hz

1-4. LEAKAGE CURRENT: EACH LINE TO GROUND

A. @115VAC 60Hz ..... 2.0 uA Max.
B. @250VAC 50Hz ..... 5.0 uA Max.

1-5. HIPOT RATING (FOR ONE MINUTE)

A. LINE TO GROUND 2250VDC
B. LINE TO LINE 1450VDC

1-6. TEMPERATURE RANGE: -25 TO +85 DEGREE C

1-7. MINIMUM INSERTION LOSS IN dB: (AT 50 OHM SYSTEM)

FREQ. MHz	.01	.05	.10	.15	.50	1.0	5.0	10	30
COM. MODE dB	/	12	18	20	25	25	25	20	10
DIF. MODE dB	/	0	2	4	12	15	25	25	20

1-8. SAFETY

REPORT BY	CHECKED BY	APPROVED BY		
			3	
			2	
			REV.1	

DELTA ELECTRONICS, INC.
186 RUEY KUANG ROAD, NEIHU. TAIPEI 114, TAIWAN, R.O.C.
TEL:886-2-87972088 FAX:886-2-87972120

SPECIFICATION FOR APPROVAL

TO: _____

PART NO.		REV.		DELTA SAMPLE ISSUE NO	
PART NAME	EMI FILTER			DELTA MODEL	03SB3SM
ORDER P/N.	03SB3SM			SAMPLE ISSUE DATE	

2. PHYSICAL DIMENSIONS:

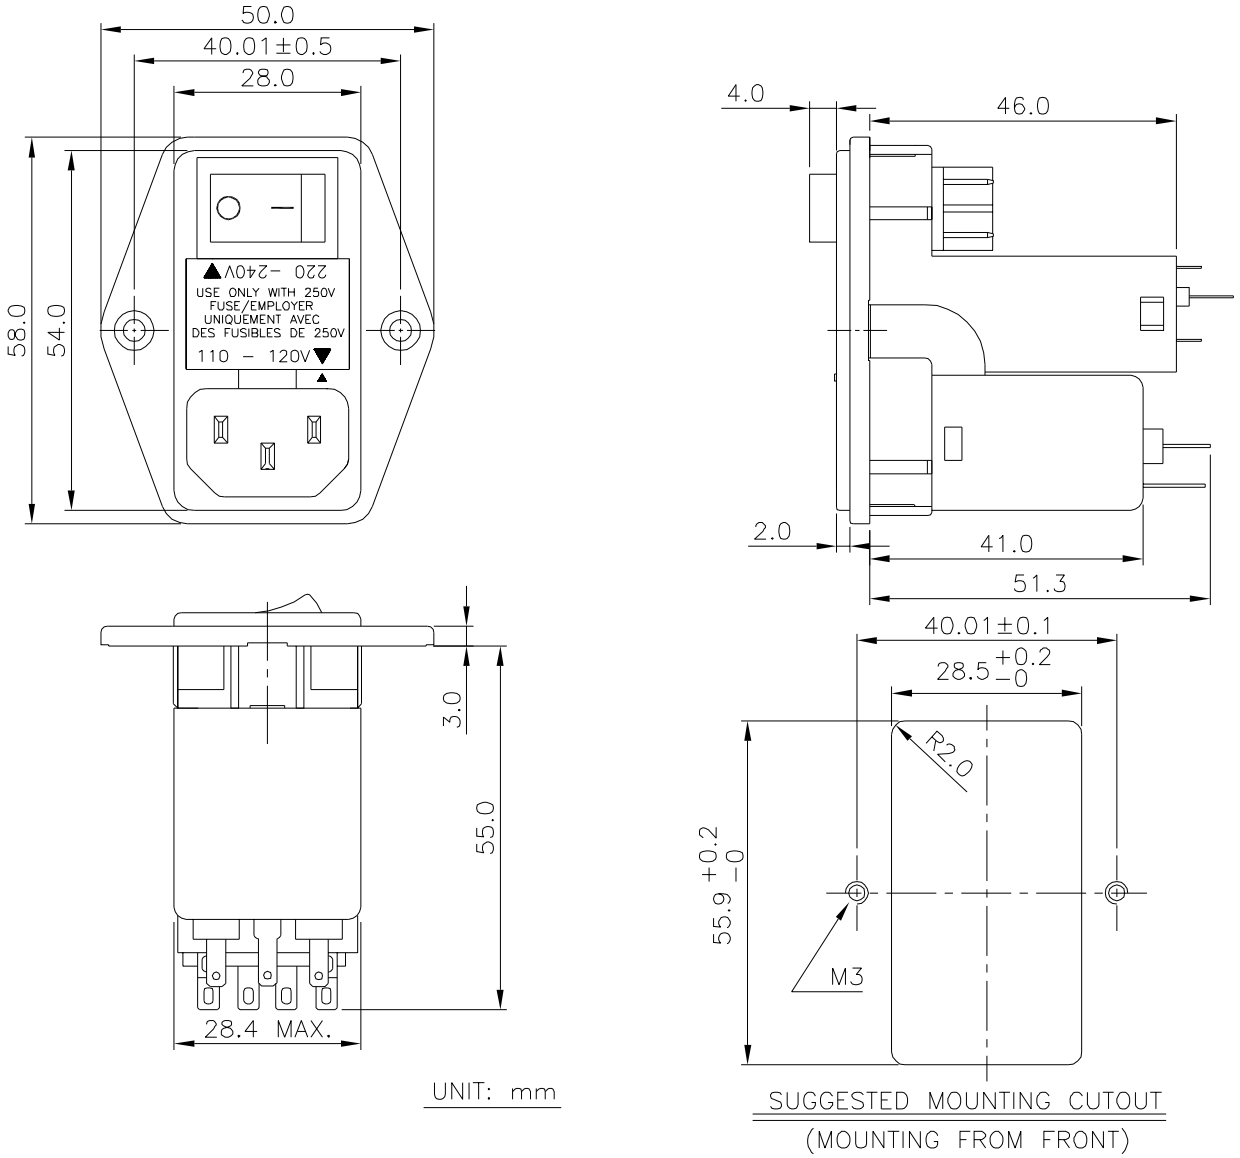

UNIT: mm

SUGGESTED MOUNTING CUTOUT
(MOUNTING FROM FRONT)

3. ELECTRICAL SCHEMATIC:

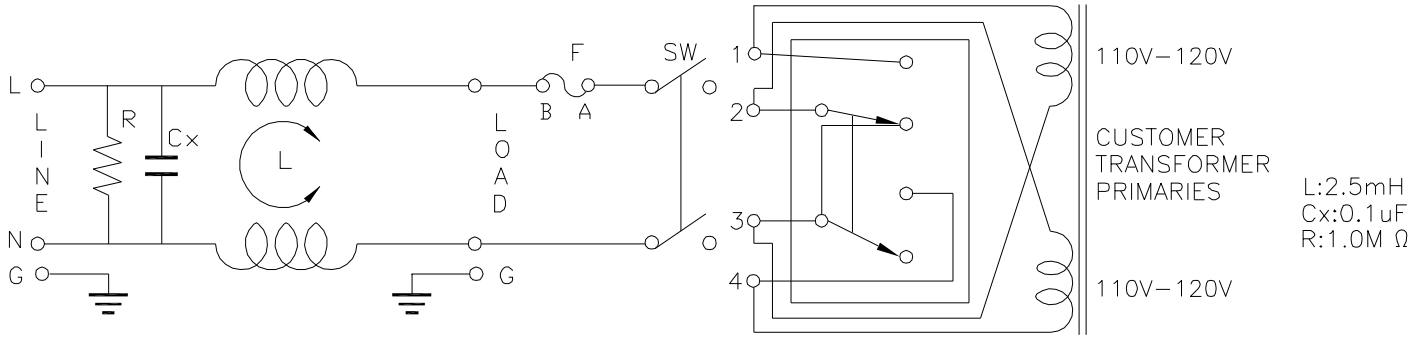

REPORT BY	CHECKED BY	APPROVED BY	UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCE DCEIMALS .X± 1.0 .XX± ANGLES±
			REV. S00

DELTA ELECTRONICS, INC.
186 RUEY KUANG ROAD, NEIHU. TAIPEI 114, TAIWAN, R.O.C.
TEL:886-2-87972088 FAX:886-2-87972120