


SHEET 1 OF 1




PCB MOUNTING

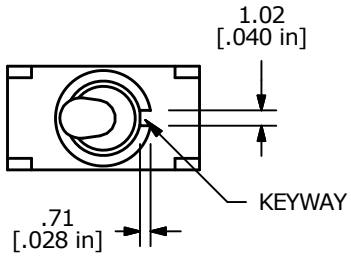


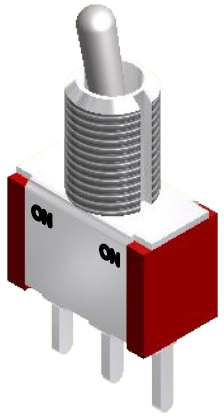


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	NONE	ON
2-3	N/A	2-1



CIRCUIT: SPDT

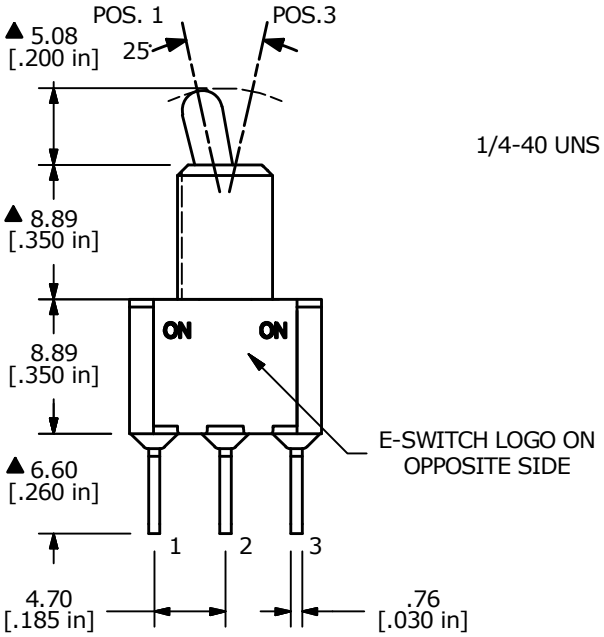

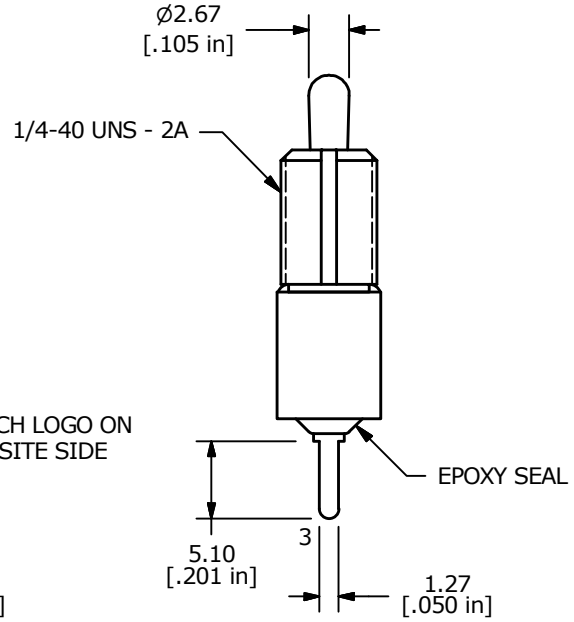

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲4. PLATING MATERIAL: GOLD
5. RATING: 0.4 (VA) MAX. @20V MAX
6. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MΩ MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2011/65/EU (ROHS) COMPLIANT
12. HARDWARE: TO BE SUPPLIED IN BULK
    T100011 - LOCK WASHER QTY = 1
    T100015 - LOCKING RING QTY = 1
    T100000 - HEX NUT QTY = 2

REV	PCR NO	DESCRIPTION	DATE	BY
D	22745	NEW RELEASE	3/20/17	MJR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE 100SP1T2B1M2REH

SCALE	DATE	DR	DWG	REV
2:1	3/1/2017	MJR	ST111000	D