



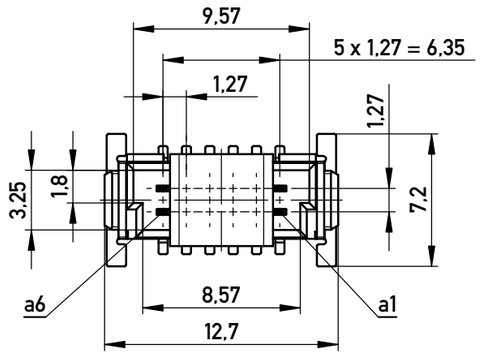

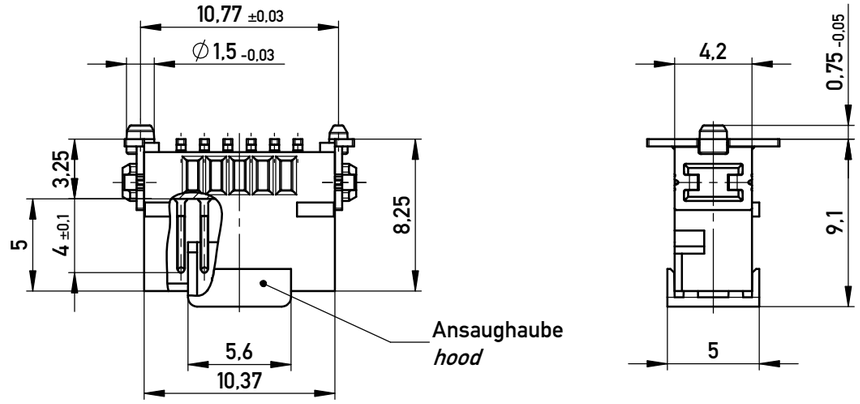


Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating


Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm


Verpackt in Gurtverpackung
Tape on Reel Packaging
Verpackungseinheit: 280 Stück
Packaging unit: 280 pcs

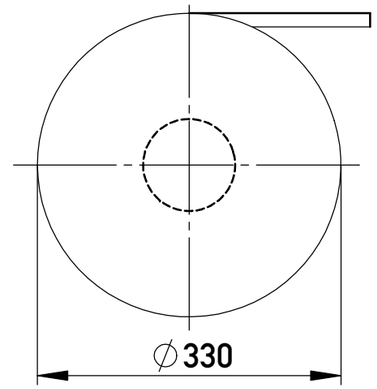

Abspulrichtung - *Reel off Direction*

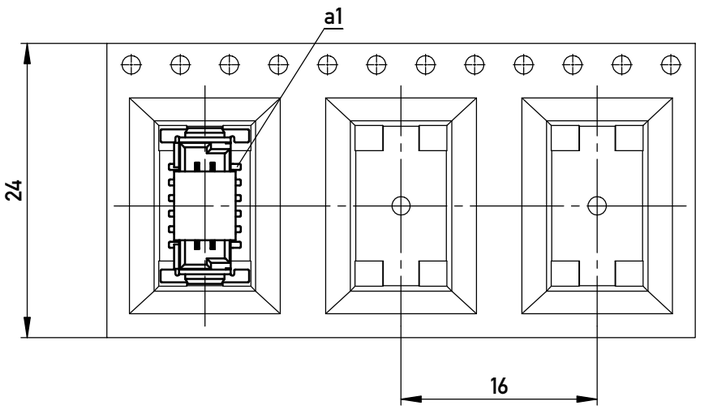

Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

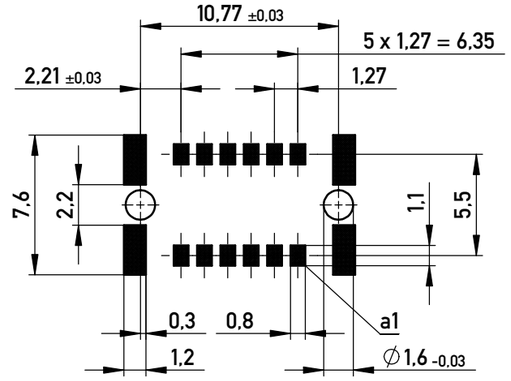

BA 8-03 - Standard Bauhöhe
type 8-03 - Standard Assembly Height

Information:	Tolerances All Dimensions in mm	Scale 3:1	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.	Designation Messerl. SMC-Q-12-SMD-BA8-03 *Male SMC-Q 12-SMD-type8-03*	
d — 24.02.2014 Index — Date	www.ERNI.com	100203210031	K A3
		Class SMCQ	

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.