# External Drive
# Piezo Transducer (AC)

CANOPUS











| Canopus Part no. | Min sound Output (dBA) | Rated Voltage (V) | Max Input Voltage (V) | Resonant Frequency (Hz) | Capacitance (pF) | Operating Tempature (℃) | Housing | Weight (g) |
|---|---|---|---|---|---|---|---|---|
| CPT2211C20TP | 70 AT 10cm | 3 Vp-p | 30 Vrms | 2000 | 30000 ± 30% at 1000Hz | -30 ~ +70 | PBT | 3.2 |
| CPT2211C40TP | 85 AT 10cm | 3 Vp-p | 40 Vrms | 4000 | 15000 ± 30% at 1000Hz | -30 ~ +70 | PBT | 3.2 |



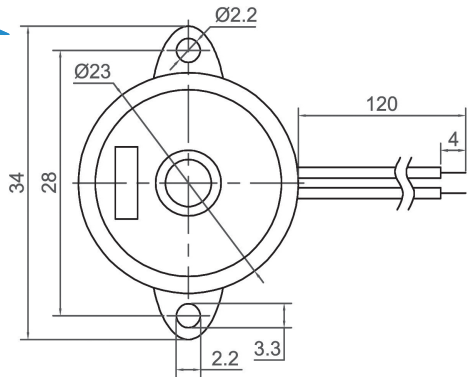


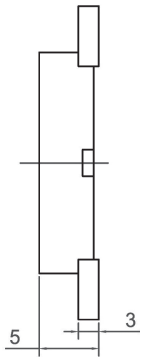


| Canopus Part no. | Min sound Output (dBA) | Rated Voltage (V) | Max Input Voltage (V) | Resonant Frequency (Hz) | Capacitance (pF) | Operating Tempature (℃) | Housing | Weight (g) |
|---|---|---|---|---|---|---|---|---|
| CPT2305I40BW | 80 AT 10cm | 12 Vp-p | 40 Vrms | 4000 | 23000 ± 30% at 1000Hz | -20 ~ +60 | ABS | 2 |











| Canopus Part no. | Min sound Output (dBA) | Rated Voltage (V) | Max Input Voltage (V) | Resonant Frequency (Hz) | Capacitance (pF) | Operating Tempature (℃) | Housing | Weight (g) |
|---|---|---|---|---|---|---|---|---|
| CPT2308G30NP | 80 AT 10cm | 9 Vp-p | 40 Vrms | 3000 | 24000 ± 30% at 1000Hz | -30 ~ +80 | Noryl | 2 |


**Your Efficient Supplier**

www.canopus.com.hk

TEL.: (852) 2806 2812 Fax: (852) 2652 2216