
DSB300

IP40 Dust-proof Digital Signage Player
Supports Intel® Atom™ processor D525
1.8 GHz

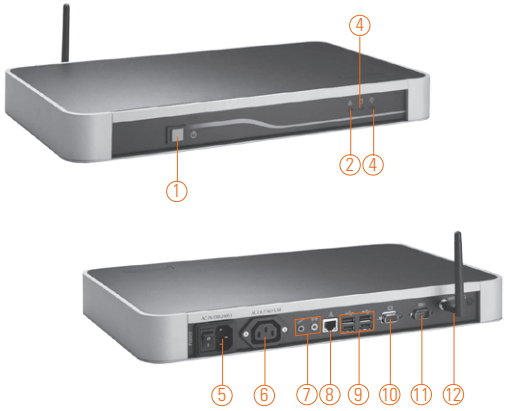

1. Power switch
2. Ethernet LED
3. HDD LED
4. Power LED
5. AC inlet
6. AC outlet
7. Audio (Line-out/Mic-in)
8. Ethernet
9. USB 2.0 x 4
10. VGA
11. COM (RS-232)
12. Wifi antenna

Full HD | IP40 | Fanless | Low Power

Specifications

Standard Color	Black
Construction	Aluminum
CPU	Intel® Atom™ processor D525 1.8 GHz
Chipset	Intel® ICH8M
System Memory	2 x 204-pin DDR3 SO-DIMM max. up to 4 GB
Storage	2.5" SATA HDD
BIOS	AMI
System I/O Outlet	4 X USB 2.0 1 X 10/100/1000Mbps Ethernet 1 X VGA 1 x RS-232 1 x Audio (Mic-in/Line-out)
Indicator	1 x LED for system power ON, 1 x LED for HDD
WiFi	Optinal 802.11 b/g/N
Expansion Slot	2 x PCI Express Mini Card (for optional 3G and wireless module)
Power Supply	65W, 100 ~ 240VAC
Operating Temperature	0°C ~ +40°C (+32°F ~ +104°F)
Dimensions	400 mm (15.74") (W) x 235 mm (9.25") (D) x 44 mm (1.73") (H)
Packing Dimensions	580 mm (22.83") (W) x 152 mm (5.98") (D) x 363 mm (14.29") (H)
Weight (net/gross)	3.8 kg (8.37 lb)/4.6 kg (10.14 lb)
Certification	CE

Packing

4 x foot stand
2 x wall mount bracket
4 x M4 screw
1 x driver CD

Features

- Sn Dust-proof design (full enclosure: IP40)
- Fanless operation
- Low power consumption: Intel® Atom™ processor D525 1.8 GHz
- Hardware decoder for full HD monitor
- Optional 3G and wireless module
- Supplies power to LCD
- Supports wall mount

Optional EOS Installation

Windows® XP Embedded

Optional OS Installation

Windows® XP, Windows® 7


Ordering Information

Standard	
DSB300 (P/N: E22L300100)	Fanless IP40 dust-free digital signage player with Intel® processor D525 1.8 GHz

Optional
3G module and antenna
Wireless LAN kit
AC output cable

* Specification and certifications are based on options and may vary.

Dimensions

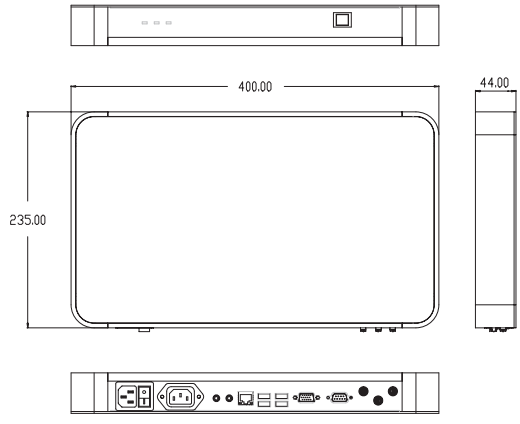

* All specifications and photos are subject to change without notice.
© 2014 Axiomtek Co., Ltd. All rights reserved.