OptoSupply

5mm Round Yellow & Yellow Green LED

OSYGHC5B32A


▪Features

- High Luminous LEDs
- 5mm Round Standard Directivity
- Superior Weather-resistance
- UV Resistant Epoxy
- White Diffused Type

▪Applications

- Toys
- Games
- Audio
- Other Lighting

▪Outline Dimension

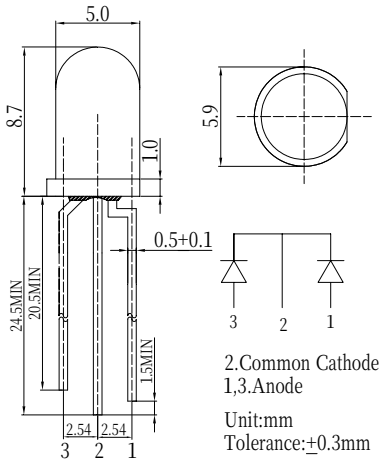


▪Absolute Maximum Rating (Ta=25°C)

Item	Symbol	Value		Unit
		Yellow	YG	
DC Forward Current	I_F	30	30	mA
Pulse Forward Current*	I_{FP}	100	100	mA
Reverse Voltage	V_R	5	5	V
Power Dissipation	P_D	78	78	mW
Operating Temperature	Topr	-30~ +85		°C
Storage Temperature	Tstg	-40 ~ +100		°C
Lead Soldering Temperature	Tsol	260°C/5sec		-

*Pulse width Max.10ms Duty ratio max 1/10

▪Directivity

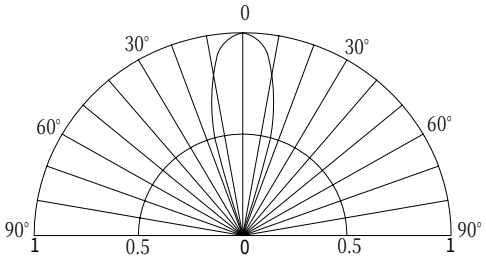

▪Electrical -Optical Characteristics (Ta=25°C)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage	V_F (Yellow)	I_F=20mA	1.8	2.1	2.6	V
DC Forward Voltage	V_F (YG)	I_F=20mA	1.8	2.1	2.6	V
DC Reverse Current	I_R	V_R=5V	-	-	10	μA
Domi. Wavelength*	λ_D (Yellow)	I_F=20mA	585	590	595	nm
	λ_D (YG)	I_F=20mA	565	570	575	nm
Luminous Intensity*	Iv (Yellow)	I_F=20mA	500	750	-	mcd
	Iv (YG)	I_F=20mA	330	550	-	mcd
50% Power Angle	$2\theta_{1/2}$	I_F=20mA	-	30	-	deg

*1 Tolerance of dominant wavelength is ±1nm

*2 Tolerance of luminous intensity is ±15%

LED & Application Technologies

ATTENTION
OBSERVE PRECAUTIONS
ELECTROSTATIC
SENSITIVE DEVICES