
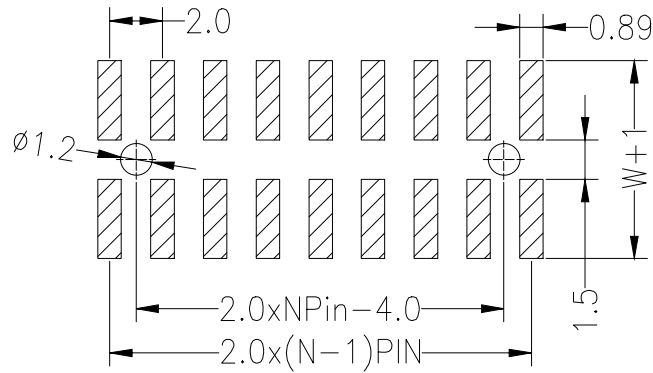


Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)




SPECIFICATIONS

Rated Current:1.5AMP  
Contact Resistance:20mΩ Max  
Withstand Voltage:500V AC/DC  
Insulation Resistance:1000MΩ Min  
Operation Temperature:-40°c to +105°c

Contact Material:Brass  
Contact Plating:Au or Sn Over Ni  
Insulator Material:Polyester(UL94V-0)  
Standard: PA6T  
Max.Processing Temp: 230°C for 30-60 seconds  
(260°C for 5 seconds)

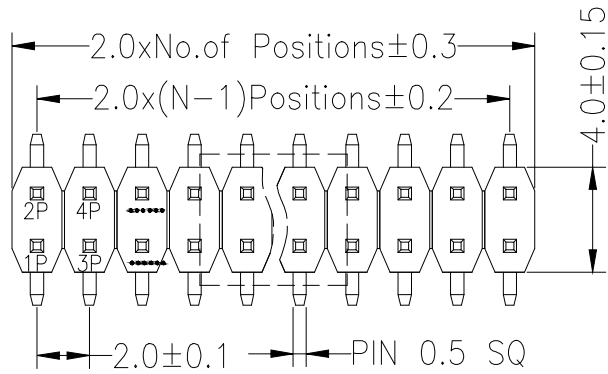

Dimension antitheses list			
ITEM	PA	PB	W
Standard	3.80	2.50	6.50
Alternate			

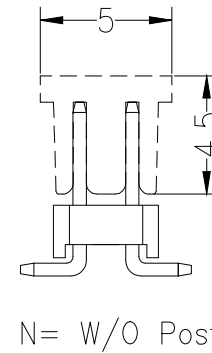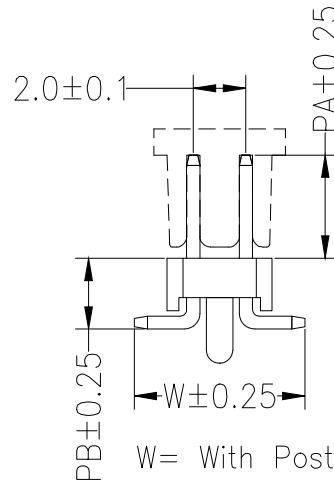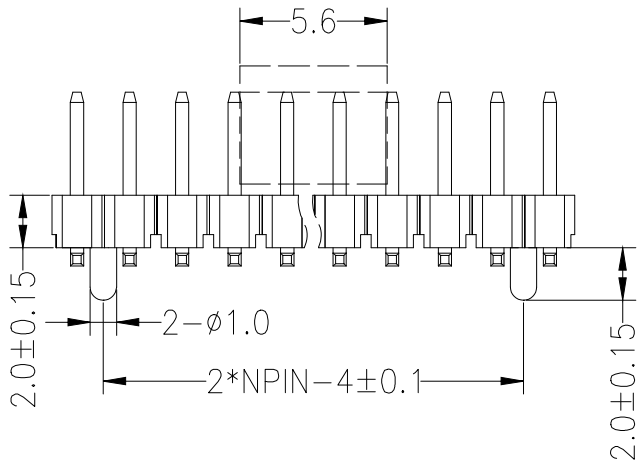

Ordering Information

PZ	200	- *	- N	- S	- *	- **	- P
No. of Rows 1=Single Row 2=Dual Row	No. of Pins 2-40Pin	Type 2=排针 3=弯针 4=直插	Length (产品型高)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	Post (带柱)		

			GENERAL TOLERANCE	制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM TOL	审核 CHECK	产品名称 TITLE	2.00双排 排针 贴片(塑高2.0)	版本 REV.	A
			X.X ±0.30	批准 APPROVAL	产品料号 PART NO.	PZ200-2-N-S-2.0-XX	单位 UNITS	mm
			X.XX ±0.20	比例 SCALE	材料 MATERIAL		页次 SHEET	1/1
			X.XXX ±0.10	投影 Projection				
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°					