

AUDIO

- 3 - 9 way available
- Competitively priced
- Industry compatible
- Mates with DBCMD0508, 0508A & 0509 series
- Cable mounted
- Machined Pin

DIN PLUGS

SECTION 6



SPECIFICATION

Material & Finish


Insulator:	PBT Glass filled UL94V-0
Cover:	PVC
Contact:	Copper Alloy
Shell:	Steel
Plating:	Contact 1. Tin Plated (Complete) 2. Gold Flash (Complete) 3. Selective Gold over Nickel Plated (Contact Area), tin/lead over Nickel Plated (Tail area) Shell Nickel Plated

Electrical Characteristics


Rating Current:	1 Amp
Contact Resistance:	<15 mΩ
Insulation Resistance:	>1000MΩ at 500v
Dielectric Voltage:	500v at 1 minute
Operating Temperature:	-55°C to +105°C

OUTLINE DRAWING

Assembly type (female)

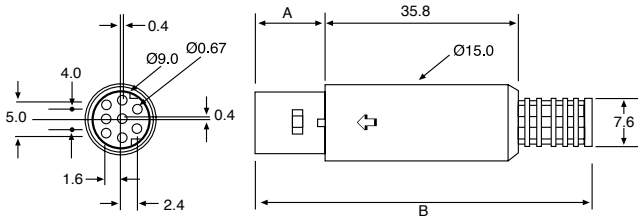


Assembly type (male)

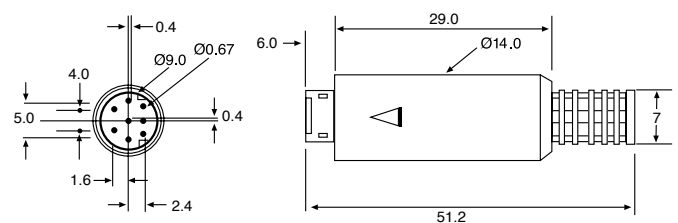

Pins	A	B
3	20.50	72.00
4	19.30	71.00
5	12.00	63.50
6	12.50	64.00
7	12.00	63.50
8	15.80	67.50

Pins

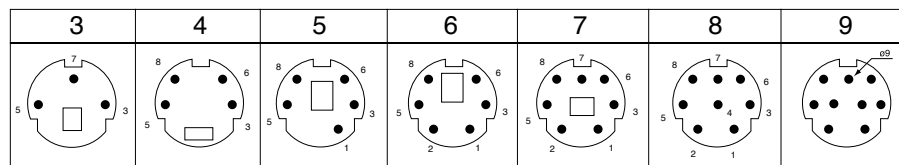

ORDERING INFORMATION

DBC	MD	11	M	4	T
Dubilier Connectors	Mini Din Connector	Series	Contact Type	No of Ways	Plating Options
			M = Male (plug) F = Female (socket)	3 = 3 Ways 4 = 4 Ways etc...	T = Tin (Std) G = Gold Flash S = Selective