

**Type: LC-15**

◆ **Product Description**


- $\phi$  15.0mm Max.(L×W), 10.0mm Max. Height.
- In addition to the typical versions of parameters shown here, custom designs are available to meet your exact requirements




◆ **Feature**

- Magnetically shielded construction.
- Max. Operating frequency 300kHz, Max. Operating power 6.5W(300kHz), 2.7W(100kHz).
- Ideally used in Portable equipment, Drive for fluorescent display tube.
- RoHS Compliance

◆ **Dimensions (mm)**

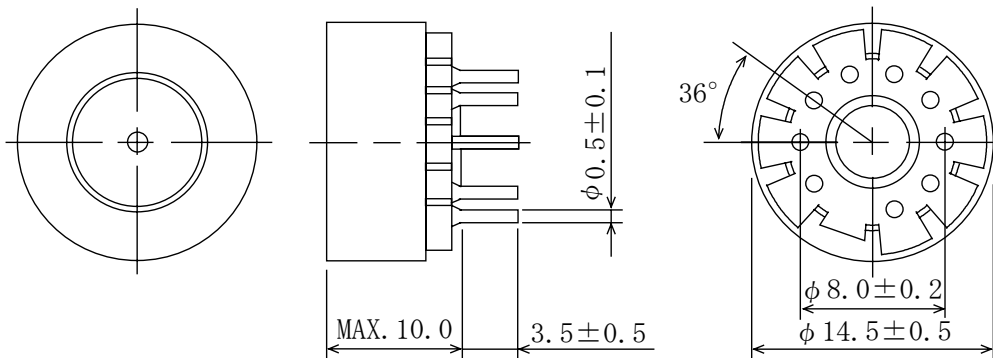

◆ **Schematics (Bottom)**



“ S ” is winding start

◆ **Specification**

Sample No.	Inductance (3-4) 1kHz/1V	D.C.R. (5-6)	Hi-pot (1,2,3,4 - 5,6)
0398 -T082	1.7mH ± 30%	0.69 Ω Max.	DC 500V/1min.