




PANEL THICKNESS	X dimension
0.75-1.25 [0.30-.049]	19.2-0.1 [7.56]
1.25-2.0 [0.49-.079]	19.4-0.1 [7.64]
2.0-3.0 [0.79-1.18]	19.8-0.1 [7.80]



PANEL CUTOUT
NOT TO SCALE



CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25

- ### 3. RATING:


6A @250VAC;9A @125VAC (UL, CSA, VDE)
4(1)A @250VAC

- #### 4. MATERIAL:

CONTACT SURFACE: Coin Silver, Silver Plate
TERMINAL: Copper Alloy w/ Silver Plate.

5. CONTACT RESISTANCE: 20mILLIOHMS TYP. INITIAL
6. INSULATION RESISTANCE: 1000Megohms
7. DIELECTRIC STRENGTH:

- >1500V RMS min. @SEA LEVEL
>3000V RMS @SEA LEVEL

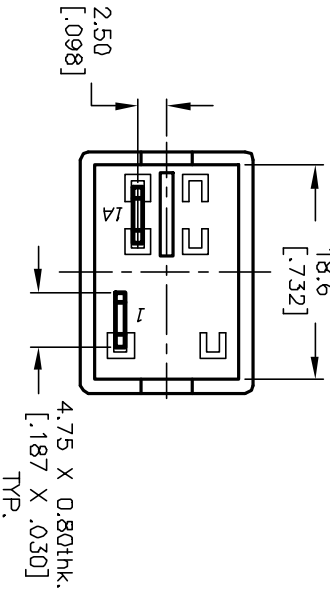

TITLE			
R1973A BLK BLK FFO			
SCALE	DATE	DR	DWG
1.5:1	2/21/01	CJB	M400006
REV			
C			