


REV. 1 11/20/97

| | |
|-----------------|-----------------|
| COIL: @ 25°C | |
| RESISTANCE | 1600 OHMS ± 10% |
| NOMINAL VOLTAGE | 26.5 VDC |
| MUST OPERATE | 18.0 VDC |
| MUST RELEASE | |

CUSTOMER DATA SHEET

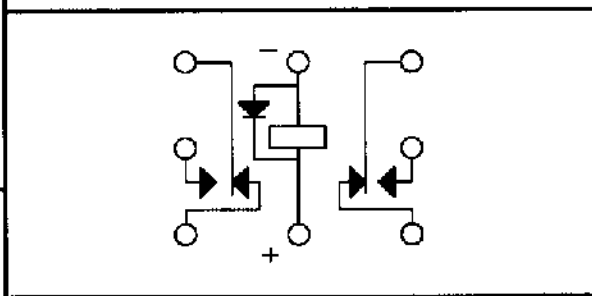

| | |
|--------------|----------------------------|
| ENVIRONMENT: | |
| VIBRATION | 10 CPS TO 500 CPS @ 10 g's |
| SHOCK | 30 g's 6 MS. DURATION |
| TEMPERATURE | -55 °C TO +85 °C |

CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS MIN.

| | |
|--------|-------------------------|
| NOTES: | OPERATE TIME 4.0 MS MAX |
| | RELEASE TIME 6.0 MS MAX |

DR. R.B. 8/7/96 *[Signature]* 11/21/97



CUST. C.I.I. STD.
CUST. NO.

TYPE "HCD" RELAY

HCD-26B