



SHOWN AS 2648



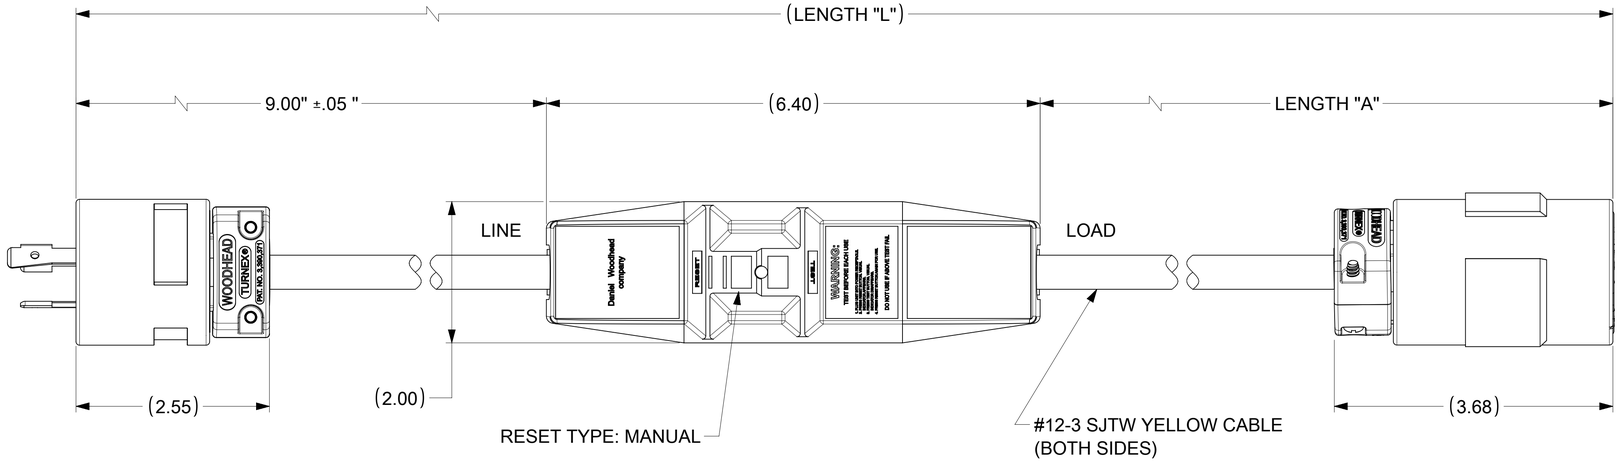

SHOWN AS 2748

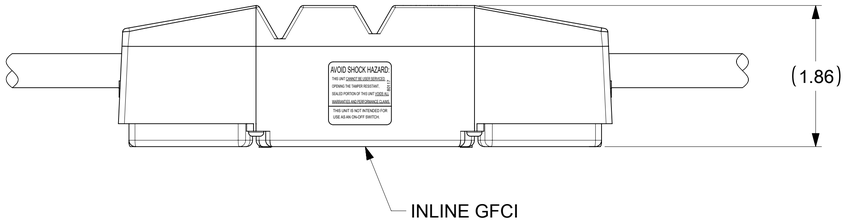

TECHNICAL

AGENCY APPROVAL:	cULus
RATED SUPPLY VOLTAGE:	240VAC
RATED CURRENT:	UP TO 20 AMPS
RESET TYPE:	MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	4-6 mA
OVERLOAD CURRENT:	120 AMP
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS

MATERIAL NO.	PART NO.	LENGTH "A"	LENGTH "L"	INPUT PLUG	OUTPUT CONNECTOR	INLINE GFCI P/N
1301530145	20054-1	9.00 IN. ± 0.5"	2 FT. 0.4 IN. ± 1"	2648	2748	30-0905
1301530147	20054-6	5.0 FT. ± 1.0"	6 FT. 3.4 IN. ± 1.5"	2648	2748	30-0906
1301530146	20054-25	24.0 FT. +2.0"/-0.0"	25 FT. 3.4 IN. +2.5"/-0.5"	2648	2748	30-0907

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

FUNCTIONAL SYMBOLS
FA = 0
FC = 0
FP = 0
DIVISIONAL SYMBOLS

DIMENSION UNITS	SCALE
INCH	NTS

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL	± °
4 PLACES	±
3 PLACES	±
2 PLACES	±
1 PLACE	±
0 PLACES	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: NEW SALES DRAWING CREATED

EC NO: 688699
DRWN: PPURSUTANDEL 2021/12/13
CHK'D: DNGUYEN62 2022/01/19
APPR: HKNEELAND 2022/01/20

INITIAL REVISION:
DRWN: PPURSUTANDEL 2021/12/13
APPR: HKNEELAND 2022/01/20

molex

INLINE GFCI 20A, 240V ATTACHABLE W/PLUG & CONN. SUPER-SAFEWAY

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
1301530145	PSD	000	A

THIRD ANGLE PROJECTION | DRAWING: D-SIZE | SERIES: 130153 | MATERIAL NUMBER: SEE TABLE | CUSTOMER: GENERAL MARKET | SHEET NUMBER: 1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2022/01/20 20:22:02