



1. Dimensions:

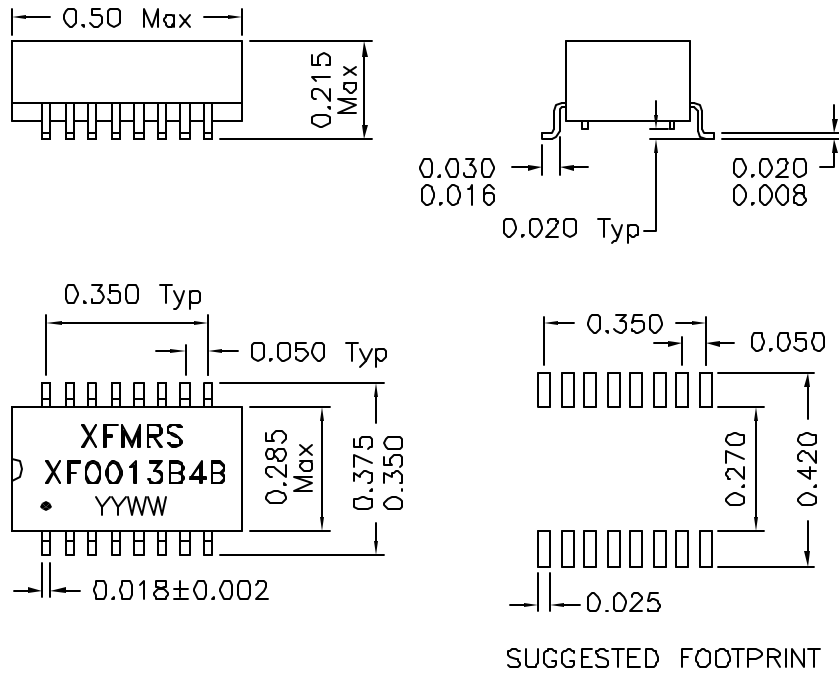

2. Schematic:

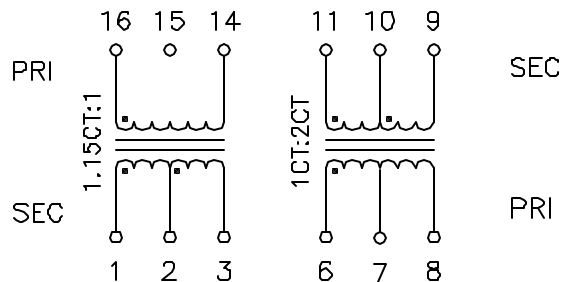

3. Electrical Specifications: @25°C

ISOLATION VOLTAGE: 1500 Vrms

TURNS RATIO: (16-14):(1-2-3)=1:1:1.15±2%

TURNS RATIO: (6-7-8):(11-10-9)=1CT:2CT ±2%

PRI OCL: 1.5mH Typ @10KHz 100mV @25°C

CW/W: 35pF Max @10KHz 100mV (Pri/Sec)

PRI LL: 0.5uH Max @100KHz 100mV Sec Shorted

PRI DCR: 0.80 Ohms Max

Crosstalk Atten.: -60dB Typ 100KHz-10MHz

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 20BD for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible

DOC. REV: A/1

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION

XFMRS Inc	Title: TRANSFORMER	
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	P/N: XF0013B4B REV. A
	DWN.	李小锋 May-03-02
	CHK.	廖玉坤 May-03-02
	APP.	Isaiah M May-03-02

SCALE 2.5:1 SHT 1 OF 1