

# AZ764S

## 16 A SPDT MINIATURE POWER RELAY SMT

### FEATURES

- Dielectric strength 5000 Vrms
- Low height: 15.7 mm
- AC and DC coils
- Flux proof version
- Isolation spacing greater than 10 mm
- Proof tracking index (PTI/CTI) 250
- Reinforced insulation, EN 60730-1 (VDE 0631, part 1)  
EN 60335-1 (VDE 0700, part 1)
- UL, CUR file E43203
- VDE certificate 40012572



### CONTACTS

<b>Arrangement</b>	SPDT (1 Form C) SPST (1 Form A)
<b>Ratings</b>	Resistive load: Max. switched power: 480 W or 4000 VA Max. switched current: 16 A Max. switched voltage: 300 VDC* or 400 VAC  * Note: If switching voltage is greater than 30 VDC, special precautions must be taken. Please contact the factory.
<b>Rated Load</b>	
<b>UL, CUR</b>	16 A at 250 VAC General Use
<b>VDE</b>	16 A at 250 VAC
<b>Material</b>	Silver nickel or silver tin oxide
<b>Resistance</b>	< 100 milliohms initially

### COIL

<b>Power</b>	
<b>At Pickup Voltage (typical)</b>	200 mW (DC coil) .422 VA (AC coil)
<b>Max. Continuous Dissipation</b>	1.7 W at 20°C (68°F) ambient 1.7 VA at 20°C (68°F) ambient
<b>Temperature Rise</b>	26°C (47°F) at nominal coil voltage
<b>Max. Temperature</b>	155°C (311°F) Class F

### NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.

### GENERAL DATA

<b>Life Expectancy</b> <b>Mechanical</b> <b>Electrical</b>	Minimum operations 3 x 10 <sup>7</sup> 7 x 10 <sup>4</sup> at 16 A 250 VAC res.
<b>Operate Time (typical)</b>	7 ms at nominal coil voltage
<b>Release Time (typical)</b>	3 ms at nominal coil voltage (with no coil suppression)
<b>Dielectric Strength (at sea level for 1 min.)</b>	5000 Vrms coil to contact 1000 Vrms between open contacts
<b>Insulation Resistance</b>	10 <sup>5</sup> megohms min. at 500 VDC, 20°C, 50% RH
<b>Insulation (according to DIN VDE 0110, IEC 60664-1)</b>	B250 at 1 Form C C250 at 1 Form A Overvoltage category: III Pollution degree: 3 Nominal voltage: 250 VAC
<b>Dropout DC coils</b> <b>AC coils</b>	Greater than 10% of nominal coil voltage Greater than 15% of nominal coil voltage
<b>Ambient Temperature</b> <b>Operating</b>  <b>Storage</b>	At nominal coil voltage -40°C (-40°F) to 85°C (185°F) - DC coils -40°C (-40°F) to 70°C (158°F) - AC coils -40°C (-40°F) to 105°C (221°F)
<b>Vibration</b>	Break contacts: 5 g at 20...500 Hz Make contacts: 20 g at 30...500 Hz
<b>Shock</b>	20 g
<b>Enclosure</b>	P.B.T. polyester, UL-94 : V0
<b>Terminals</b>	Tinned copper alloy, P.C.
<b>Max. Solder Temp.</b>	270°C (518°F)
<b>Max. Solder Time</b>	see soldering profile
<b>Weight</b>	14 grams
<b>Packing unit in pcs</b>	20 per carton tube / 1000 per carton box

## ZETTLER electronics GmbH

Junkersstr. 3, D-82178 Puchheim, Germany

phone: +49 89 800 97-0 office@ZETTLERelectronics.com  
fax: +49 89 800 97-200 www.ZETTLERelectronics.com

This product specification to be used only together with the application notes which can be downloaded from <http://www.ZETTLERelectronics.com/pdfs/relais/ApplicationNotes.pdf>

2012-03-22



# AZ764S

## RELAY ORDERING DATA

COIL SPECIFICATIONS - DC COIL				ORDER NUMBER*	
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Coil Resistance Ohm $\pm 10\%$	1 Form A	1 Form C
3	2.25	7.6	22	AZ764S-1A-3D	AZ764S-1C-3D
5	3.75	12.7	60	AZ764S-1A-5D	AZ764S-1C-5D
6	4.5	15.3	90	AZ764S-1A-6D	AZ764S-1C-6D
9	6.75	22.9	200	AZ764S-1A-9D	AZ764S-1C-9D
12	9.0	30.6	360	AZ764S-1A-12D	AZ764S-1C-12D
18	13.5	45.9	710	AZ764S-1A-18D	AZ764S-1C-18D
24	18.0	61.2	1,440	AZ764S-1A-24D	AZ764S-1C-24D
36	27.0	92.0	3,140	AZ764S-1A-36D	AZ764S-1C-36D
48	36.0	122.0	5,700	AZ764S-1A-48D	AZ764S-1C-48D
60	45.0	153.0	7,500	AZ764S-1A-60D	AZ764S-1C-60D
110	82.5	280.0	25,200	AZ764S-1A-110D	AZ764S-1C-110D

COIL SPECIFICATIONS - AC COIL					ORDER NUMBER*	
Nominal Coil VAC	Must Operate VAC	Max. Continuous VAC	Nominal Current mA $\pm 10\%$	Coil Resistance Ohm $\pm 10\%$	1 Form A	1 Form C
12	9.6	18.0	63.0	100	AZ764S-1A-12A	AZ764S-1C-12A
24	19.2	36.0	31.3	400	AZ764S-1A-24A	AZ764S-1C-24A
48	38.4	72.0	15.6	1,550	AZ764S-1A-48A	AZ764S-1C-48A
60	48.0	90.0	12.5	2,600	AZ764S-1A-60A	AZ764S-1C-60A
110	88.0	165.0	6.8	8,900	AZ764S-1A-110A	AZ764S-1C-110A
115	92.0	172.5	6.5	9,600	AZ764S-1A-115A	AZ764S-1C-115A
120	96.0	180.0	6.3	10,200	AZ764S-1A-120A	AZ764S-1C-120A
220	176.0	330.0	3.4	35,500	AZ764S-1A-220A	AZ764S-1C-220A
230	184.0	345.0	3.3	38,500	AZ764S-1A-230A	AZ764S-1C-230A
240	192.0	360.0	3.1	42,500	AZ764S-1A-240A	AZ764S-1C-240A

\* "1A" or "1C" denote silver nickel contacts.  
Add suffix "E" at "1A" or "1C" for silver tin oxide contacts.

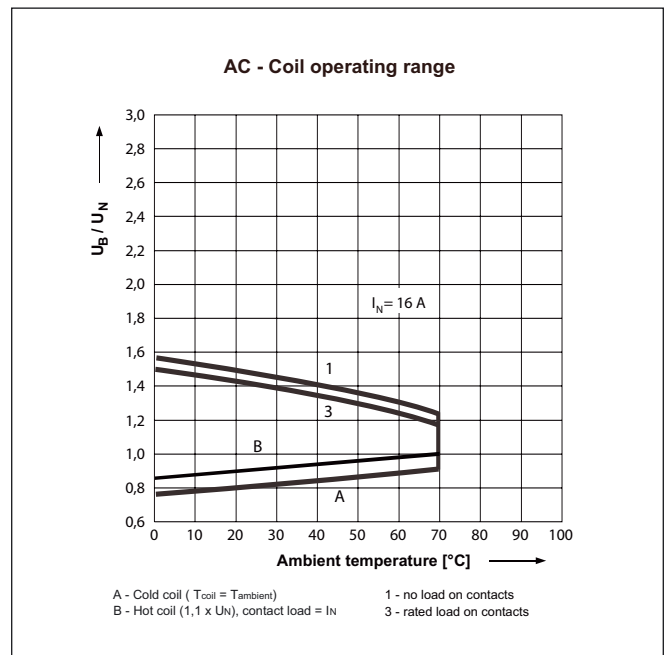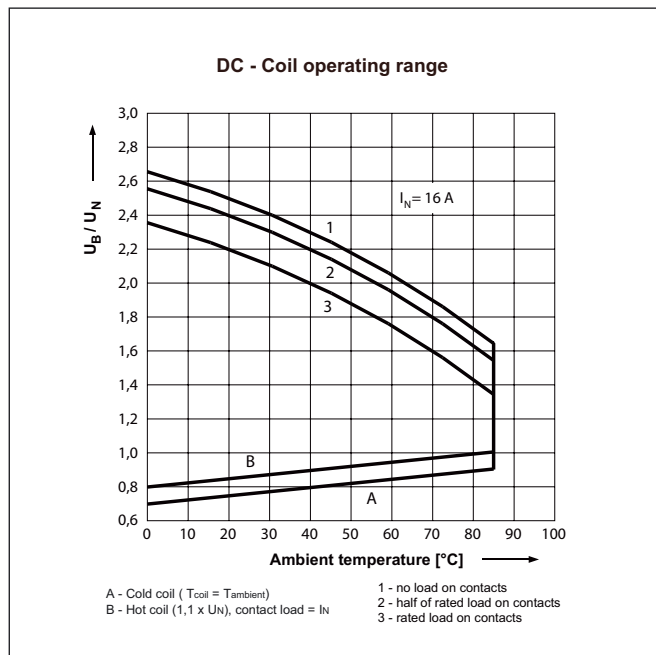

## ZETTLER electronics GmbH

Junkersstr. 3, D-82178 Puchheim, Germany

phone: +49 89 800 97-0 office@ZETTLERelectronics.com


fax: +49 89 800 97-200 www.ZETTLERelectronics.com

This product specification to be used only together with the application notes which can be downloaded from <http://www.ZETTLERelectronics.com/pdfs/relais/ApplicationNotes.pdf>


2012-03-22

# AZ764S

## MECHANICAL DATA

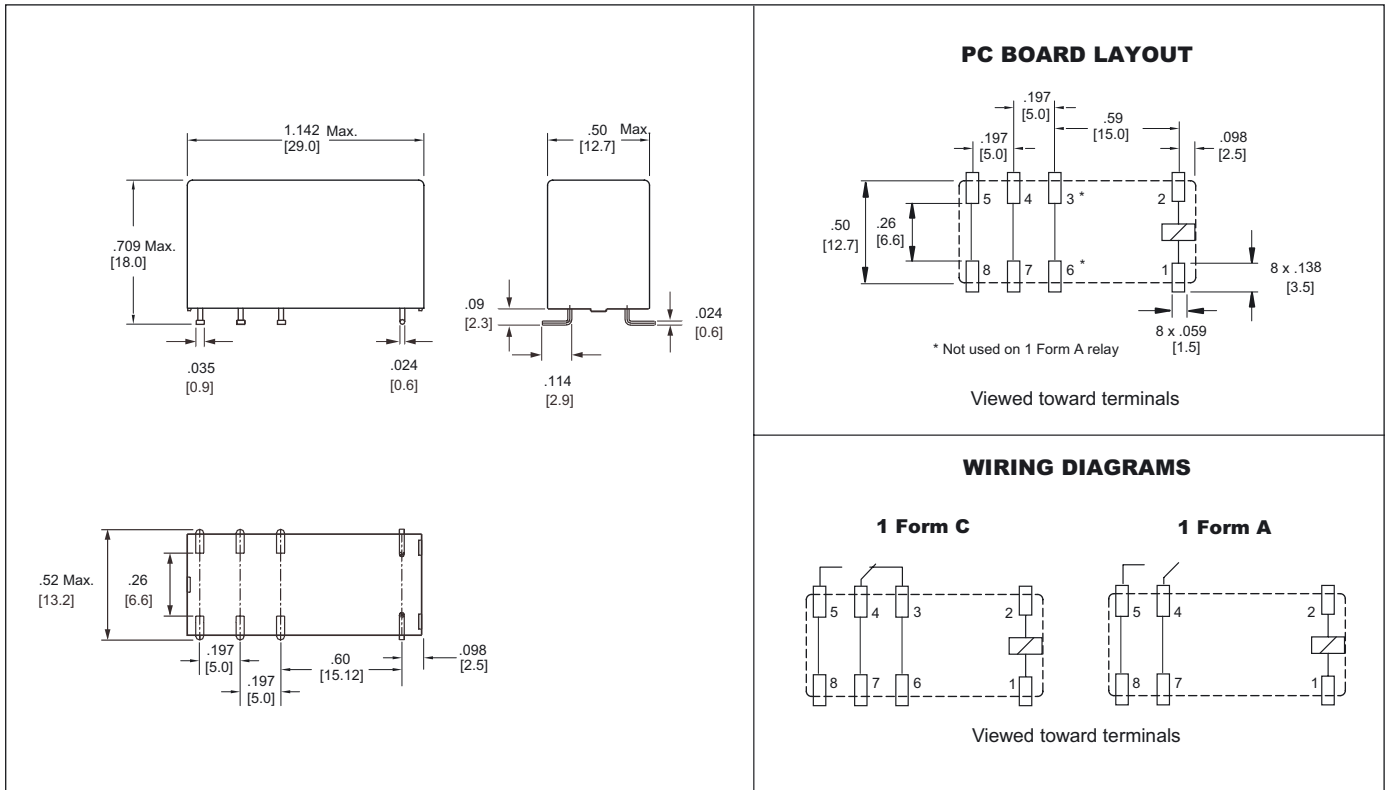

Dimensions in inches with metric equivalents in parentheses. Tolerance:  $\pm .010''$

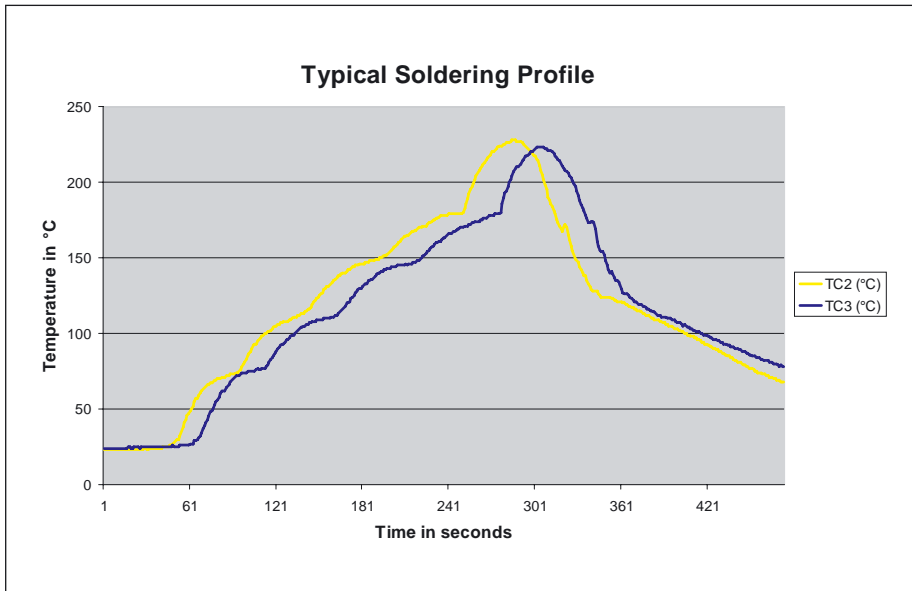

## NOTES

The soldering profile to the left is an example and is just to show one of various profiles AZ764S has been tested with.

In order to make sure AZ764S fits to a specific profile, we strongly recommend to test under the real environment.

## ZETTLER electronics GmbH

Junkersstr. 3, D-82178 Puchheim, Germany

phone: +49 89 800 97-0

office@ZETTLERelectronics.com

fax: +49 89 800 97-200


www.ZETTLERelectronics.com

This product specification to be used only together with the application notes which can be downloaded from <http://www.ZETTLERelectronics.com/pdfs/relais/ApplicationNotes.pdf>


2012-03-22

# AZ764S


Electrical life at 250 VAC, resistive load

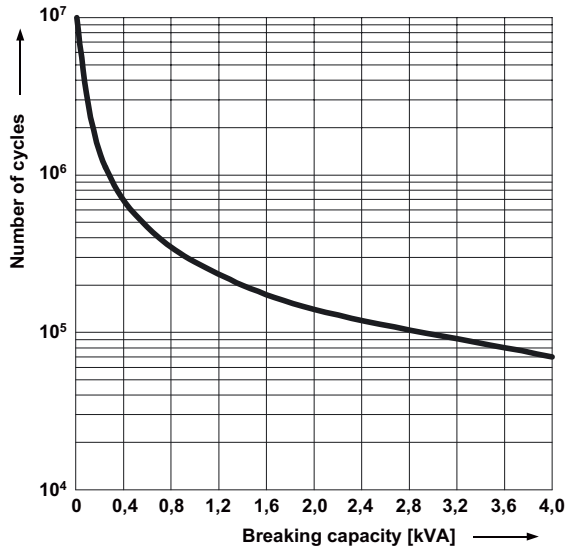

Electrical life reduction factor at inductive AC load

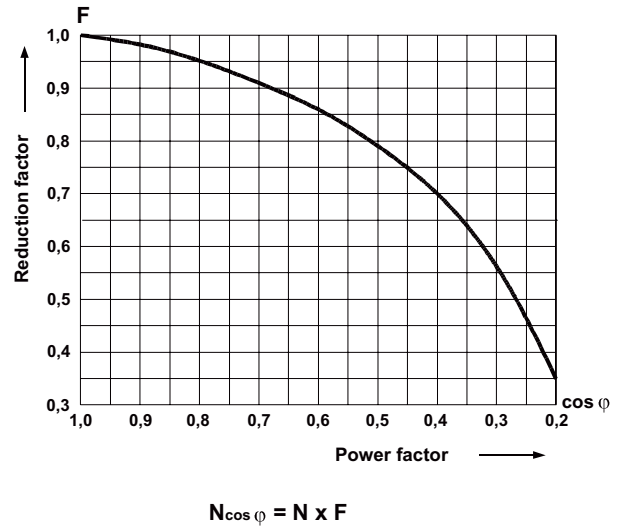

Max. DC resistive load breaking capacity

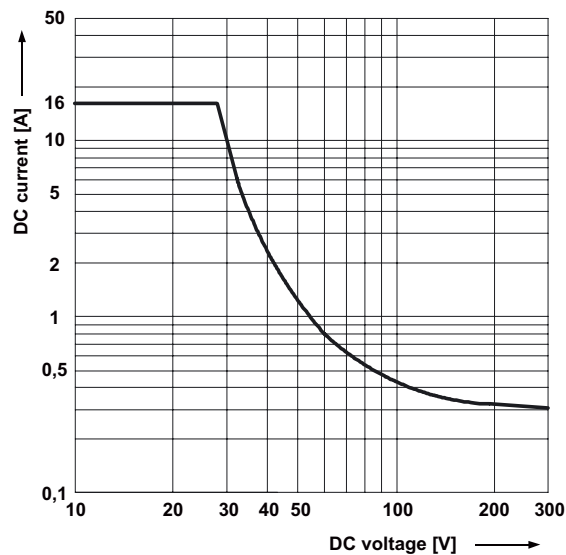

## ZETTLER electronics GmbH

Junkersstr. 3, D-82178 Puchheim, Germany

phone: +49 89 800 97-0 office@ZETTLERelectronics.com

fax: +49 89 800 97-200 www.ZETTLERelectronics.com

This product specification to be used only together with the application notes

which can be downloaded from <http://www.ZETTLERelectronics.com/pdfs/relais/ApplicationNotes.pdf>

2012-03-22